



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6136

SPECfp®2006 = 32.8

SPECfp\_base2006 = 22.5

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

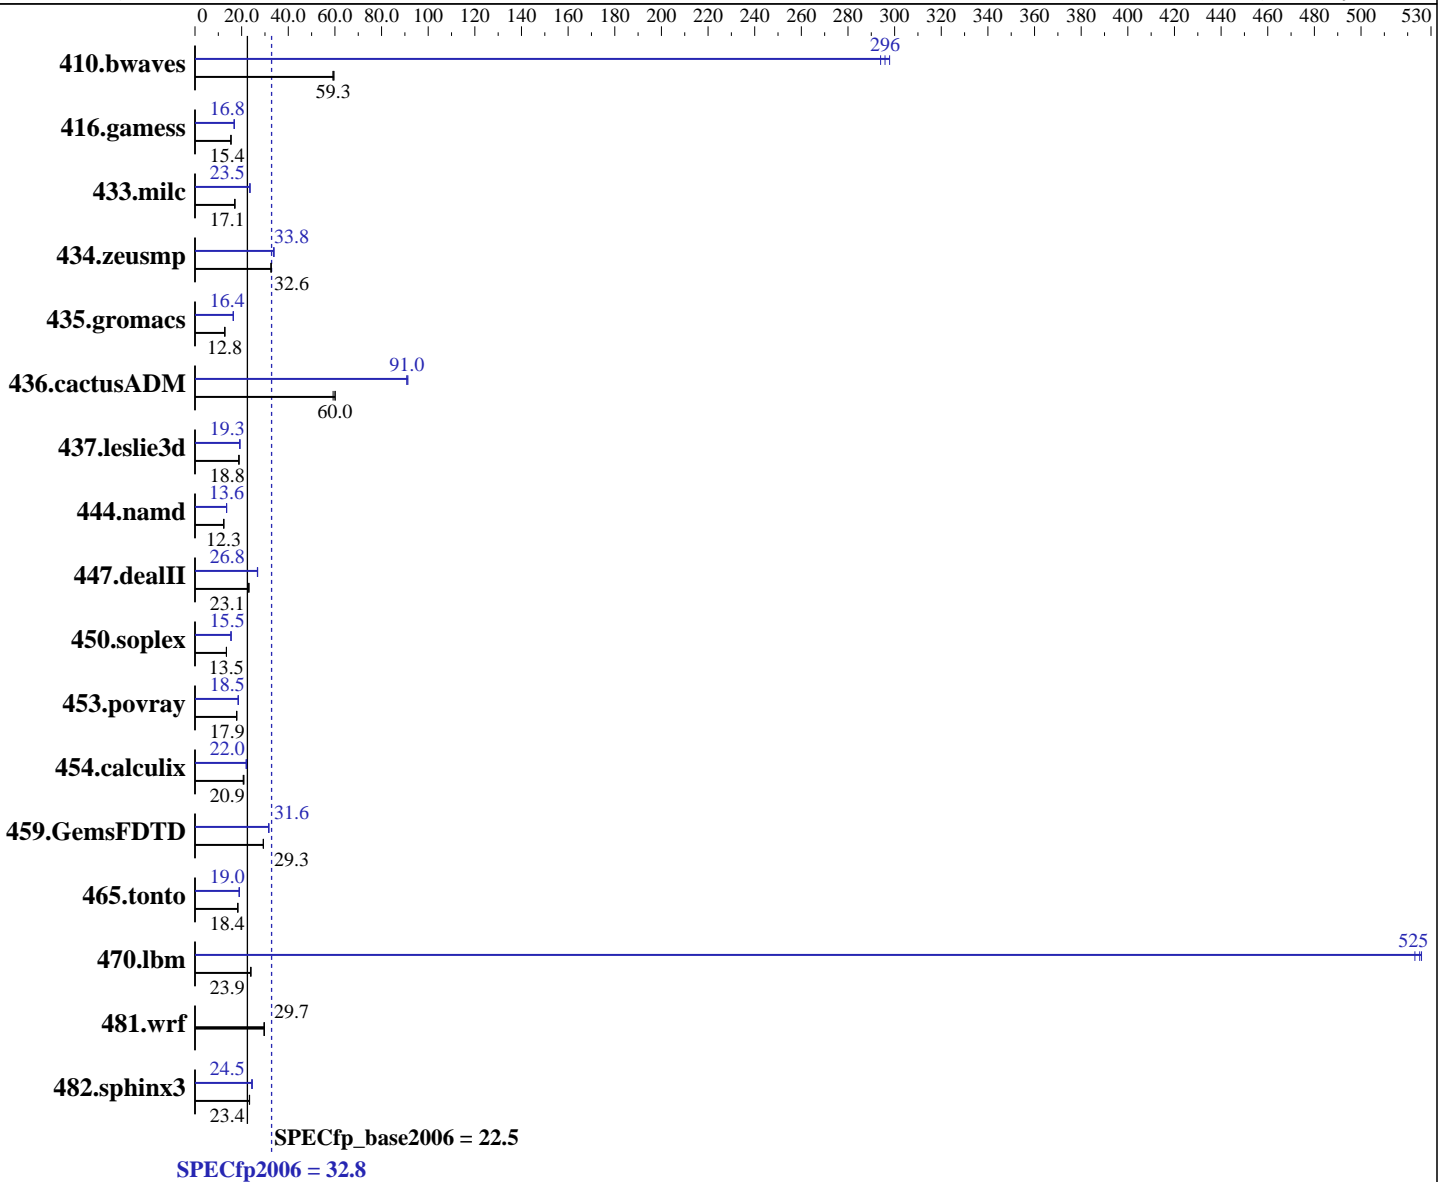

### Hardware

CPU Name: AMD Opteron 6136  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 5.5, Advanced Platform, Kernel 2.6.18-194.el5  
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6136

SPECfp2006 = **32.8**

SPECfp\_base2006 = **22.5**

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
Other Cache: None  
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
Other Hardware: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	230	59.2	<b><u>229</u></b>	<b><u>59.3</u></b>	228	59.6	46.2	294	45.6	298	<b><u>45.9</u></b>	<b><u>296</u></b>
416.gamess	1269	15.4	1271	15.4	<b><u>1269</u></b>	<b><u>15.4</u></b>	<b><u>1163</u></b>	<b><u>16.8</u></b>	1163	16.8	1166	16.8
433.milc	<b><u>538</u></b>	<b><u>17.1</u></b>	535	17.1	540	17.0	<b><u>390</u></b>	<b><u>23.5</u></b>	391	23.5	389	23.6
434.zeusmp	279	32.7	279	32.6	<b><u>279</u></b>	<b><u>32.6</u></b>	270	33.7	<b><u>269</u></b>	<b><u>33.8</u></b>	269	33.9
435.gromacs	<b><u>559</u></b>	<b><u>12.8</u></b>	559	12.8	558	12.8	434	16.5	<b><u>435</u></b>	<b><u>16.4</u></b>	435	16.4
436.cactusADM	202	59.2	<b><u>199</u></b>	<b><u>60.0</u></b>	199	60.1	<b><u>131</u></b>	<b><u>91.0</u></b>	131	91.3	132	90.8
437.leslie3d	498	18.9	500	18.8	<b><u>499</u></b>	<b><u>18.8</u></b>	488	19.3	490	19.2	<b><u>488</u></b>	<b><u>19.3</u></b>
444.namd	<b><u>650</u></b>	<b><u>12.3</u></b>	649	12.4	652	12.3	594	13.5	591	13.6	<b><u>591</u></b>	<b><u>13.6</u></b>
447.dealII	496	23.1	<b><u>496</u></b>	<b><u>23.1</u></b>	496	23.1	428	26.7	426	26.9	<b><u>427</u></b>	<b><u>26.8</u></b>
450.soplex	618	13.5	<b><u>619</u></b>	<b><u>13.5</u></b>	620	13.5	<b><u>540</u></b>	<b><u>15.5</u></b>	541	15.4	539	15.5
453.povray	297	17.9	298	17.8	<b><u>298</u></b>	<b><u>17.9</u></b>	287	18.5	<b><u>287</u></b>	<b><u>18.5</u></b>	286	18.6
454.calculix	<b><u>395</u></b>	<b><u>20.9</u></b>	399	20.7	394	20.9	<b><u>375</u></b>	<b><u>22.0</u></b>	373	22.1	376	21.9
459.GemsFDTD	361	29.4	<b><u>362</u></b>	<b><u>29.3</u></b>	362	29.3	336	31.6	<b><u>336</u></b>	<b><u>31.6</u></b>	335	31.7
465.tonto	<b><u>536</u></b>	<b><u>18.4</u></b>	538	18.3	536	18.4	519	18.9	<b><u>518</u></b>	<b><u>19.0</u></b>	518	19.0
470.lbm	<b><u>574</u></b>	<b><u>23.9</u></b>	576	23.9	572	24.0	26.1	526	<b><u>26.2</u></b>	<b><u>525</u></b>	26.3	523
481.wrf	375	29.8	<b><u>376</u></b>	<b><u>29.7</u></b>	377	29.6	375	29.8	<b><u>376</u></b>	<b><u>29.7</u></b>	377	29.6
482.sphinx3	<b><u>833</u></b>	<b><u>23.4</u></b>	833	23.4	836	23.3	795	24.5	801	24.3	<b><u>795</u></b>	<b><u>24.5</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=8000 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6136

SPECfp2006 = 32.8

SPECfp\_base2006 = 22.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
openc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
openc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6136

SPECfp2006 = 32.8

SPECfp\_base2006 = 22.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Base Optimization Flags

### C benchmarks:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m

### C++ benchmarks:

-march=barcelona -Ofast -static -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

-march=barcelona -Ofast -apo -LNO:parallel\_overhead=10000  
-LNO:fusion\_peeling\_limit=0 -HP:bdt=2m:heap=2m

### Benchmarks using both Fortran and C:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo  
-LNO:parallel\_overhead=10000 -LNO:fusion\_peeling\_limit=0

## Peak Compiler Invocation

### C benchmarks:

openc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6136

SPECfp2006 = 32.8

SPECfp\_base2006 = 22.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Peak Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -Ofast -apo -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-CG:compute\_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse\_cse\_regs=0  
-LNO:prefetch\_ahead=4 -CG:locs\_shallow\_depth=1  
-CG:cmp\_peep=on -CG:compute\_to=on -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -CG:load\_exe=0 -fno-exceptions  
-m32 -HP:bdt=2m:heap=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc\_alg=2  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -LNO:blocking=off  
-LNO:prefetch=3 -LNO:prefetch\_ahead=5

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6136

SPECfp2006 = 32.8

SPECfp\_base2006 = 22.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Aug-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## Peak Optimization Flags (Continued)

410.bwaves (continued):

-LNO:ignore\_feedback=off -LNO:apo\_use\_feedback=on  
-WOPT:aggstr=0

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off

-LNO:interchange=off -LNO:fusion\_peeling\_limit=0  
-OPT:treeheight=on -OPT:unroll\_size=256 -CG:cmp\_peep=on  
-CG:compute\_to=on -GRA:prioritize\_by\_density=on  
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll\_size=256

-LNO:prefetch\_ahead=4 -LNO:parallel\_overhead=32768  
-GRA:prioritize\_by\_density=on -m3dnw -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2

-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -Ofast -apo

-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -apo  
-LANG:heap\_allocation\_threshold=1000 -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch\_ahead=30

-CG:load\_exe=0 -CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2  
-CG:compute\_to=on -WOPT:unroll=2 -GRA:optimize\_boundary=on  
-HP:bdt=2m:heap=2m -apo

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6136

**SPECfp2006 = 32.8**

**SPECfp\_base2006 = 22.5**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Aug-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:06:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 December 2010.