



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6164 HE

**SPECint®2006 = 16.9**

**SPECint\_base2006 = 14.0**

**CPU2006 license:** 49


**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Oct-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

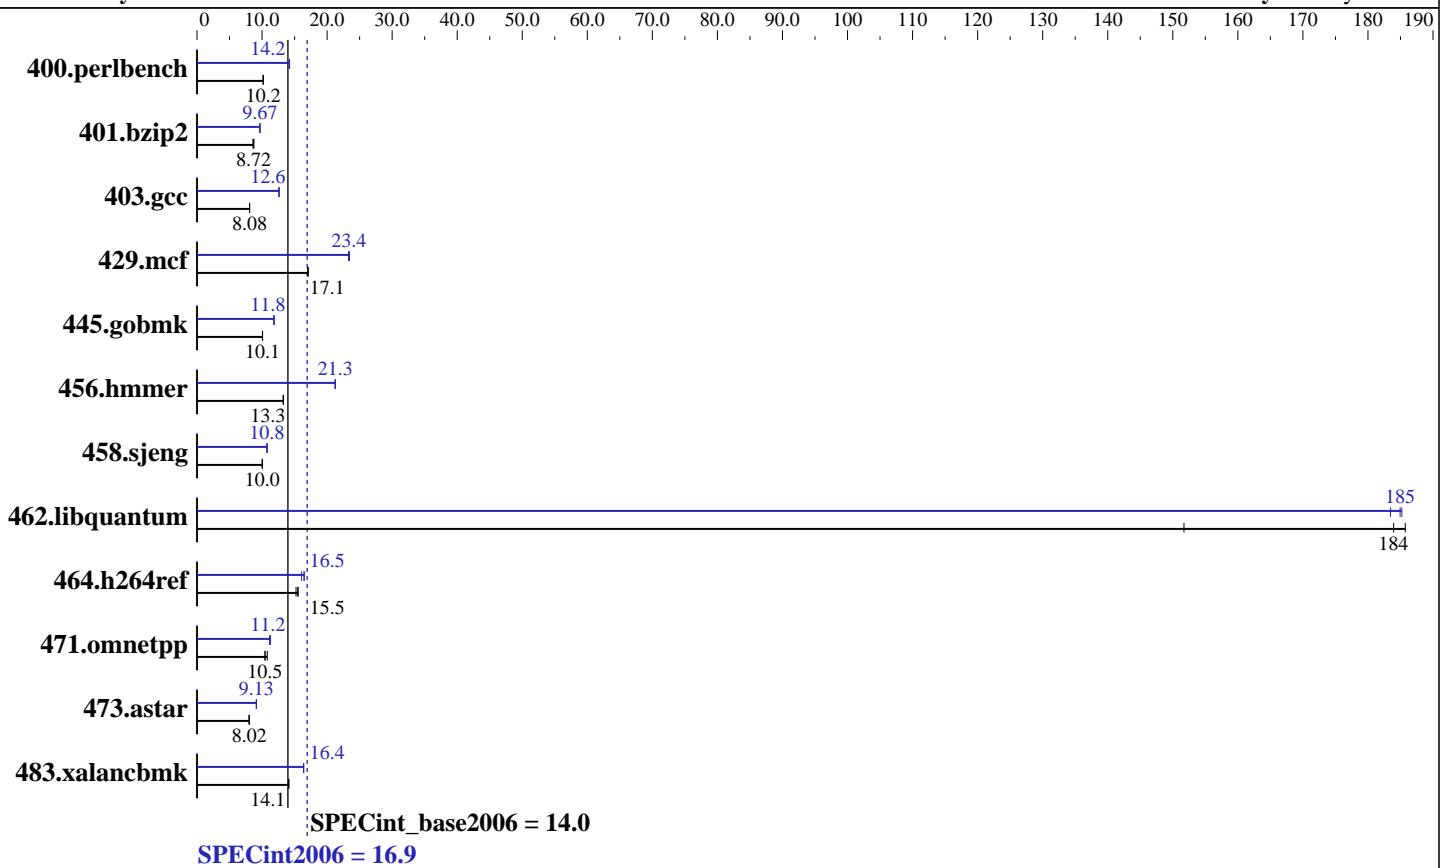

<b>Hardware</b>		<b>Software</b>	
CPU Name:	AMD Opteron 6164 HE	Operating System:	Red Hat Enterprise Linux Server release 5.5, Advanced Platform, Kernel 2.6.18-194.el5
CPU Characteristics:		Compiler:	x86 Open64 4.2.3.2 Compiler Suite (from AMD)
CPU MHz:	1700	Auto Parallel:	Yes
FPU:	Integrated	File System:	ext3
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip	System State:	Run level 3 (Full multiuser with network)
CPU(s) orderable:	2,4 chips	Base Pointers:	32/64-bit
Primary Cache:	64 KB I + 64 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	512 KB I+D on chip per core	Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 6 cores		
Other Cache:	None		
Memory:	128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)		
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6164 HE

**SPECint2006 = 16.9**

**SPECint\_base2006 = 14.0**

**CPU2006 license:** 49

**Test date:** Oct-2010

**Test sponsor:** Advanced Micro Devices

**Hardware Availability:** Mar-2010

**Tested by:** Advanced Micro Devices

**Software Availability:** May-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>960</b>	<b>10.2</b>	959	10.2	960	10.2	691	14.1	<b>687</b>	<b>14.2</b>	687	14.2
401.bzip2	1123	8.60	<b>1107</b>	<b>8.72</b>	1106	8.73	<b>998</b>	<b>9.67</b>	999	9.66	997	9.68
403.gcc	<b>996</b>	<b>8.08</b>	996	8.08	996	8.08	637	12.6	639	12.6	<b>639</b>	<b>12.6</b>
429.mcf	<b>535</b>	<b>17.1</b>	536	17.0	534	17.1	392	23.3	<b>390</b>	<b>23.4</b>	389	23.4
445.gobmk	1041	10.1	<b>1042</b>	<b>10.1</b>	1043	10.1	887	11.8	<b>886</b>	<b>11.8</b>	885	11.9
456.hammer	702	13.3	704	13.3	<b>703</b>	<b>13.3</b>	439	21.3	439	21.2	<b>439</b>	<b>21.3</b>
458.sjeng	1208	10.0	<b>1204</b>	<b>10.0</b>	1203	10.1	1125	10.8	<b>1124</b>	<b>10.8</b>	1123	10.8
462.libquantum	137	152	112	186	<b>113</b>	<b>184</b>	<b>112</b>	<b>185</b>	112	185	113	183
464.h264ref	1454	15.2	1423	15.5	<b>1428</b>	<b>15.5</b>	1376	16.1	<b>1345</b>	<b>16.5</b>	1343	16.5
471.omnetpp	<b>597</b>	<b>10.5</b>	578	10.8	598	10.4	<b>559</b>	<b>11.2</b>	554	11.3	560	11.2
473.astar	876	8.02	874	8.04	<b>875</b>	<b>8.02</b>	<b>769</b>	<b>9.13</b>	770	9.12	768	9.14
483.xalancbmk	<b>490</b>	<b>14.1</b>	488	14.1	491	14.1	421	16.4	421	16.4	<b>421</b>	<b>16.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=8000 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,
24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45,46,47"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6164 HE

**SPECint2006 = 16.9**

**SPECint\_base2006 = 14.0**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Oct-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-march=barcelona -Ofast -apo -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m,limit=450 -LNO:parallel\_overhead=10000

C++ benchmarks:  
-march=barcelona -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6164 HE

**SPECint2006 = 16.9**

**SPECint\_base2006 = 14.0**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Oct-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

## Peak Portability Flags (Continued)

```
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m
```

```
401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
```

```
403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
```

```
429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m
```

```
445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m
```

```
456.hmmr: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
            -OPT:alias=disjoint -OPT:unroll_times_max=8
            -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:local_sched_alg=1 -CG:cflow=0
            -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
            -HP:bdt=2m:heap=2m
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6164 HE

**SPECint2006 = 16.9**

**SPECint\_base2006 = 14.0**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Oct-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

## Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
           -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
           -IPA:pu_reorder=2 -IPA:min_hotness=32 -CG:ptr_load_use=0
           -OPT:unroll_times_max=8 -INLINE:aggressive=on
           -HP:bdt=2m:heap=2m
```

```
462.libquantum: -march=barcelona -Ofast -apo -LNO:pf2=0 -CG:gcm=off
                 -CG:use_prefetchchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
                 -OPT:alias=disjoint -INLINE:aggressive=on -IPA:space=1000
                 -IPA:plimit=20000 -mso
```

```
464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
              -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
              -CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m
```

C++ benchmarks:

```
471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
              -WOPT:if_conv=0 -m32 -HP:bdt=2m:heap=2m
```

```
473.astar: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
            -WOPT:if_conv=0 -GRA:optimize_boundary=on
            -OPT:alias=disjoint -INLINE:aggressive=on
            -IPA:small_pu=3000 -IPA:plimit=3000 -m32
            -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
                 -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
                 -fno-emit-exceptions
                 -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6164 HE

**SPECint2006 = 16.9**

**SPECint\_base2006 = 14.0**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Oct-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:11:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 December 2010.