



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu SPARC Enterprise M4000

SPECfp®_rate2006 = 140

SPECfp_rate_base2006 = 127

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

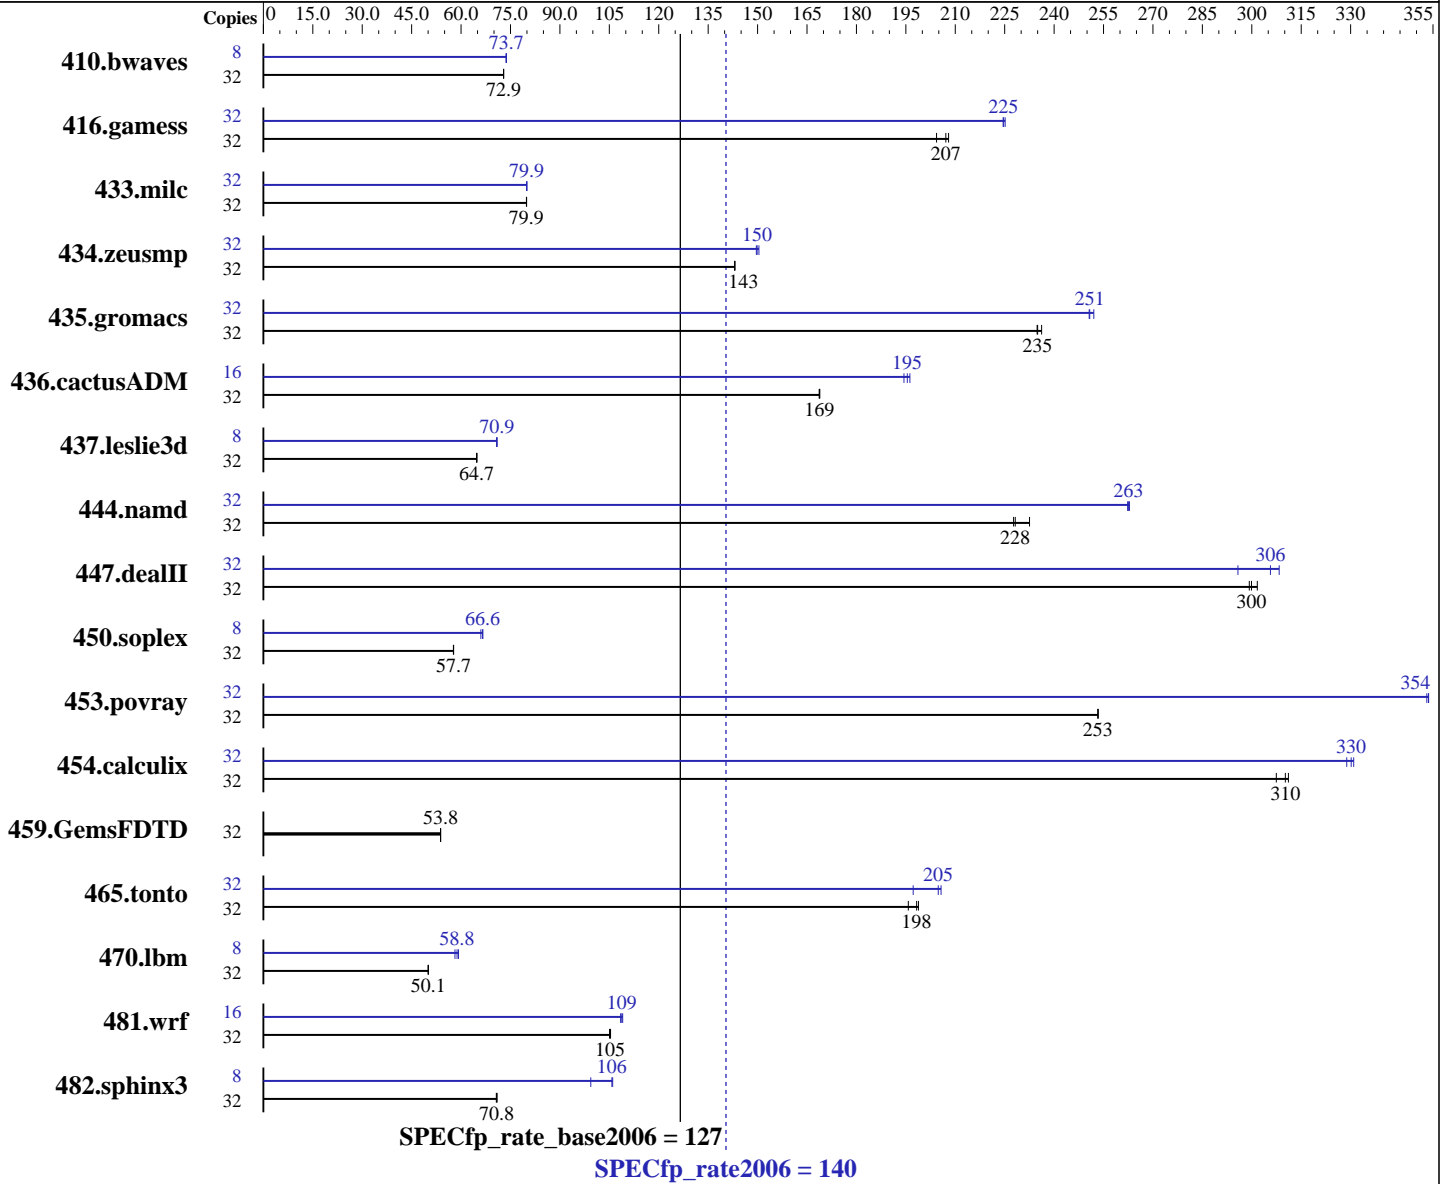

Hardware

CPU Name: SPARC64 VII+
 CPU Characteristics:
 CPU MHz: 2660
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 2 CPUMs; each CPUM contains 2 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 11 MB I+D on chip per chip

Continued on next page

Software

Operating System: Oracle Solaris 10 9/10
 Compiler: Oracle Solaris Studio 12.2
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu SPARC Enterprise M4000

SPECfp_rate2006 = 140

SPECfp_rate_base2006 = 127

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

L3 Cache: None
Other Cache: None
Memory: 128 GB (32 x 4 GB, 8-way interleaved)
Disk Subsystem: 1 x 300 GB 10,000 RPM SAS
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	5965	72.9	5964	72.9	5965	72.9	8	1474	73.7	1476	73.7	1473	73.8
416.gamess	32	3013	208	3025	207	3067	204	32	2790	225	2789	225	2783	225
433.milc	32	3679	79.8	3677	79.9	3679	79.9	32	3675	79.9	3674	80.0	3675	79.9
434.zeusmp	32	2035	143	2035	143	2036	143	32	1936	150	1946	150	1943	150
435.gromacs	32	972	235	967	236	973	235	32	906	252	912	251	911	251
436.cactusADM	32	2265	169	2267	169	2265	169	16	978	195	983	194	974	196
437.leslie3d	32	4640	64.8	4647	64.7	4649	64.7	8	1061	70.9	1060	70.9	1062	70.8
444.namd	32	1127	228	1125	228	1104	233	32	976	263	978	263	978	262
447.dealII	32	1221	300	1223	299	1214	302	32	1198	306	1238	296	1187	308
450.soplex	32	4625	57.7	4622	57.7	4627	57.7	8	1011	66.0	1002	66.6	1002	66.6
453.povray	32	672	253	672	253	672	253	32	481	354	481	354	482	353
454.calculix	32	859	307	851	310	849	311	32	803	329	798	331	800	330
459.GemsFDTD	32	6312	53.8	6314	53.8	6312	53.8	32	6312	53.8	6314	53.8	6312	53.8
465.tonto	32	1609	196	1584	199	1588	198	32	1531	206	1537	205	1597	197
470.lbm	32	8786	50.0	8784	50.1	8784	50.1	8	1870	58.8	1890	58.1	1856	59.2
481.wrf	32	3392	105	3402	105	3396	105	16	1648	108	1639	109	1643	109
482.sphinx3	32	8821	70.7	8795	70.9	8805	70.8	8	1474	106	1471	106	1569	99.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
118683-05 119963-20 120753-08
Oracle Solaris Studio 12.2 and patches are available at
<http://oracle.com/goto/solarisstudio>

The Apache C++ Standard Library V4.2.1 was installed from
<http://stdcxx.apache.org/download.html> using:
alias gmake=specmake
gmake BUILDTYPE=8d CONFIG=sunpro.config



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M4000

SPECfp_rate2006 = 140

SPECfp_rate_base2006 = 127

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

ulimit -s 131072 was used to allow the stack to grow up to 131072 KB (aka 128 MB). Note that saying "131072" is preferable to "unlimited", because there is a tradeoff between space for the stack vs. space for the heap.

System Tunables (/etc/system parameters):

tune_t_fsflushr=10

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

autoup=600

Causes pages older than the listed number of seconds to be written by fsflush.

Other System Settings:

The webconsole service was turned off using
svcadm disable webconsole

Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M4000 server from Fujitsu. The SPARC Enterprise M4000 server from Oracle and from Fujitsu are electrically equivalent.

General Notes

447.dealIII (peak): "apache_stdctx_4_2_1" src.alt was used.

447.dealIII (base): "apache_stdctx_4_2_1" src.alt was used.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M4000

SPECfp_rate2006 = 140

SPECfp_rate_base2006 = 127

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xlinkopt -xvector
-xalias_level=std -xprefetch_auto_type=indirect_array_access
-xprefetch_level=3

C++ benchmarks:
-xdepend -fast -fma=fused -xipo=2 -xpagesize=4M -xlinkopt -xvector
-xalias_level=compatible -xprefetch=latx:0.5 -library=no%Cstd
-I/mnt/spec//stdcxx-4.2.1/include
-I/mnt/spec//stdcxx-4.2.1/build/include
-L/mnt/spec//stdcxx-4.2.1/build/lib -R/mnt/spec//stdcxx-4.2.1/build/lib
-lstd8d

Fortran benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xlinkopt -xvector
-xprefetch_level=2

Benchmarks using both Fortran and C:
-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M -xlinkopt
-xvector -xalias_level=std -xprefetch_auto_type=indirect_array_access
-xprefetch_level=3 -xprefetch_level=2

Base Other Flags

C benchmarks:
-xjobs=32 -V -#

C++ benchmarks:
-xjobs=32 -verbose=diags,version

Fortran benchmarks:
-xjobs=32 -V -v

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M4000

SPECfp_rate2006 = 140

SPECfp_rate_base2006 = 127

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
-xjobs=32 -V -# -v

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xarch=generic -fsimple=1
-W2,-Ainline:rs=400 -xalias_level=std
-xprefetch_auto_type=indirect_array_access -xprefetch_level=2

470.lbm: -fast -xpagesize=4M -fma=fused -xipo=2 -xarch=generic
-xvector -xunroll=8 -xprefetch=latx:2

482.sphinx3: -fast -xpagesize=4M -fma=fused -xalias_level=std
-M /usr/lib/ld/map.bssalign -xipo=2 -xprefetch_level=2
-xunroll=4 -xprefetch=latx:1.2 -l12amm

C++ benchmarks:

444.namd: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xalias_level=compatible -library=stlport4
-xalias_level=any -xchip=generic -xunroll=2

447.dealIII: -xdepend -fast -xpagesize=4M -fma=fused
-xalias_level=compatible -library=no%Cstd
-I/mnt/spec//stdcxx-4.2.1/include
-I/mnt/spec//stdcxx-4.2.1/build/include -xipo=2
-xprefetch=latx:0.5 -L/mnt/spec//stdcxx-4.2.1/build/lib
-R/mnt/spec//stdcxx-4.2.1/build/lib -lstd8d

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M4000

SPECfp_rate2006 = 140

SPECfp_rate_base2006 = 127

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

450.soplex: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xprefetch_level=2 -xprefetch_auto_type=indirect_array_access
-Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3
-Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3
-xalias_level=simple -xrestrict -library=stlport4

453.povray: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xalias_level=compatible -library=stlport4 -xO4
-xipo=2 -xprefetch=no%auto -xunroll=4 -xlinkopt=2 -lfast

Fortran benchmarks:

410.bwaves: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=2

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xprefetch=no%auto -xO3

434.zeusmp: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch=no%auto
-xunroll=3 -l12amm

437.leslie3d: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -M /usr/lib/ld/map.bssalign -xipo=2
-xprefetch_level=1 -xunroll=7 -l12amm

459.GemsFDTD: basepeak = yes

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xprefetch=no%auto -xO4 -xunroll=3
-lfast

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xprefetch=no%auto
-xchip-generic -xinline= -fsimple=0 -xunroll=3

436.cactusADM: -fast(cc) -fast(f90) -xpagesize=4M -fma=fused -xipo=2
-xprefetch=latx:0.7 -fsimple=1

454.calculix: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xvector -xunroll=8
-xprefetch=latx:3 -xalias_level=std

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu
SPARC Enterprise M4000

SPECfp_rate2006 = 140

SPECfp_rate_base2006 = 127

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

```
481.wrf: -fast(cc) -fast(f90) -xpagesize=4M -fma=fused
-xalias_level=std -xipo=2 -xcache=generic -xunroll=5
-xprefetch=latx:2
```

Peak Other Flags

C benchmarks:
-xjobs=32 -V -#

C++ benchmarks:
-xjobs=32 -verbose=diags,version

Fortran benchmarks:
-xjobs=32 -V -v

Benchmarks using both Fortran and C:
-xjobs=32 -V -# -v

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:40:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.