



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp[®]_rate2006 = 319

SGI Rackable C1001-G5 (AMD Opteron 6174, 2.20 GHz)

SPECfp_rate_base2006 = 293

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Dec-2010

Hardware Availability: Sep-2010

Software Availability: Nov-2010

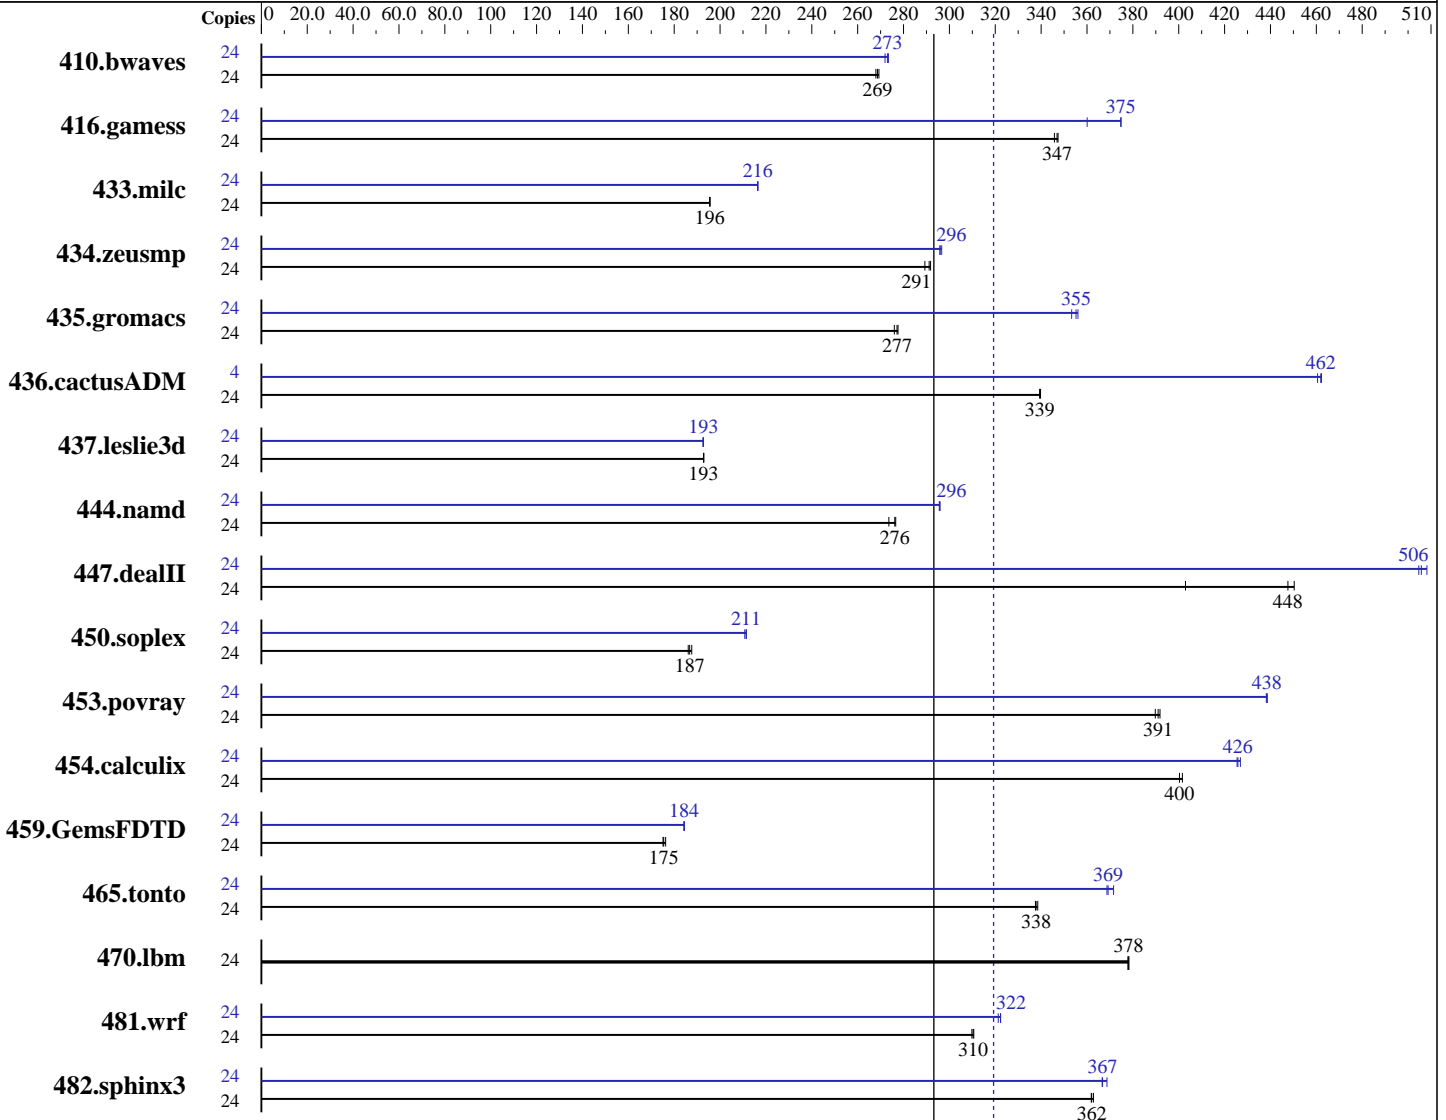

SPECfp_rate_base2006 = 293

SPECfp_rate2006 = 319

Hardware

CPU Name: AMD Opteron 6174
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) sp1, Kernel 2.6.32.13-0.4-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: NFSv3 IPoIB
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 319

SGI Rackable C1001-G5 (AMD Opteron 6174, 2.20 GHz)

SPECfp_rate_base2006 = 293

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Dec-2010
Hardware Availability: Sep-2010
Software Availability: Nov-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 5.8 TB RAID 5
20 x 146 GB + 40 x 73 GB FC (Seagate Cheetah 15K.4)
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1217	268	1211	269	<u>1214</u>	<u>269</u>	24	1199	272	<u>1195</u>	<u>273</u>	1193	273
416.gamess	24	<u>1354</u>	<u>347</u>	1359	346	1353	347	24	<u>1254</u>	<u>375</u>	1254	375	1305	360
433.milc	24	1126	196	1127	196	<u>1127</u>	<u>196</u>	24	<u>1018</u>	<u>216</u>	1018	217	1018	216
434.zeusmp	24	<u>750</u>	<u>291</u>	755	289	748	292	24	736	297	<u>738</u>	<u>296</u>	738	296
435.gromacs	24	<u>618</u>	<u>277</u>	621	276	617	278	24	485	353	481	356	<u>482</u>	<u>355</u>
436.cactusADM	24	845	339	844	340	<u>845</u>	<u>339</u>	4	<u>103</u>	<u>462</u>	104	461	103	462
437.leslie3d	24	<u>1170</u>	<u>193</u>	1170	193	1169	193	24	1170	193	<u>1171</u>	<u>193</u>	1172	193
444.namd	24	703	274	<u>697</u>	<u>276</u>	696	277	24	651	296	650	296	<u>651</u>	<u>296</u>
447.dealII	24	681	403	<u>613</u>	<u>448</u>	610	450	24	544	505	<u>543</u>	<u>506</u>	540	508
450.soplex	24	<u>1072</u>	<u>187</u>	1075	186	1067	188	24	<u>947</u>	<u>211</u>	950	211	946	211
453.povray	24	326	392	328	390	<u>327</u>	<u>391</u>	24	291	438	<u>291</u>	<u>438</u>	291	439
454.calculix	24	493	402	<u>495</u>	<u>400</u>	495	400	24	465	425	464	427	<u>465</u>	<u>426</u>
459.GemsFDTD	24	1454	175	1445	176	<u>1451</u>	<u>175</u>	24	1382	184	<u>1381</u>	<u>184</u>	1380	184
465.tonto	24	<u>699</u>	<u>338</u>	700	338	698	339	24	636	372	<u>640</u>	<u>369</u>	641	369
470.lbm	24	872	378	<u>872</u>	<u>378</u>	873	378	24	872	378	<u>872</u>	<u>378</u>	873	378
481.wrf	24	<u>864</u>	<u>310</u>	865	310	863	311	24	832	322	<u>832</u>	<u>322</u>	834	321
482.sphinx3	24	<u>1292</u>	<u>362</u>	1289	363	1293	362	24	<u>1275</u>	<u>367</u>	1269	369	1276	367

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 319

SGI Rackable C1001-G5 (AMD Opteron 6174, 2.20 GHz)

SPECfp_rate_base2006 = 293

CPU2006 license: 4

Test date: Dec-2010

Test sponsor: SGI

Hardware Availability: Sep-2010

Tested by: SGI

Software Availability: Nov-2010

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/nas/store/cma/cpu2006-1.1/amd1002mc-rate-libs-revC/64:/nas/store/cma/cpu2006-1.1/amd1002mc-rate-libs-revC/32"

OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 319

SGI Rackable C1001-G5 (AMD Opteron 6174, 2.20 GHz)

SPECfp_rate_base2006 = 293

CPU2006 license: 4

Test date: Dec-2010

Test sponsor: SGI

Hardware Availability: Sep-2010

Tested by: SGI

Software Availability: Nov-2010

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 319

SGI Rackable C1001-G5 (AMD Opteron 6174, 2.20 GHz)

SPECfp_rate_base2006 = 293

CPU2006 license: 4

Test date: Dec-2010

Test sponsor: SGI

Hardware Availability: Sep-2010

Tested by: SGI

Software Availability: Nov-2010

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 319

SGI Rackable C1001-G5 (AMD Opteron 6174, 2.20 GHz)

SPECfp_rate_base2006 = 293

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2010

Hardware Availability: Sep-2010

Software Availability: Nov-2010

Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 15:30:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 January 2011.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 6