



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 46.8

IBM System x3500 M3 (Intel Xeon X5690)

SPECint_base2006 = 44.1

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

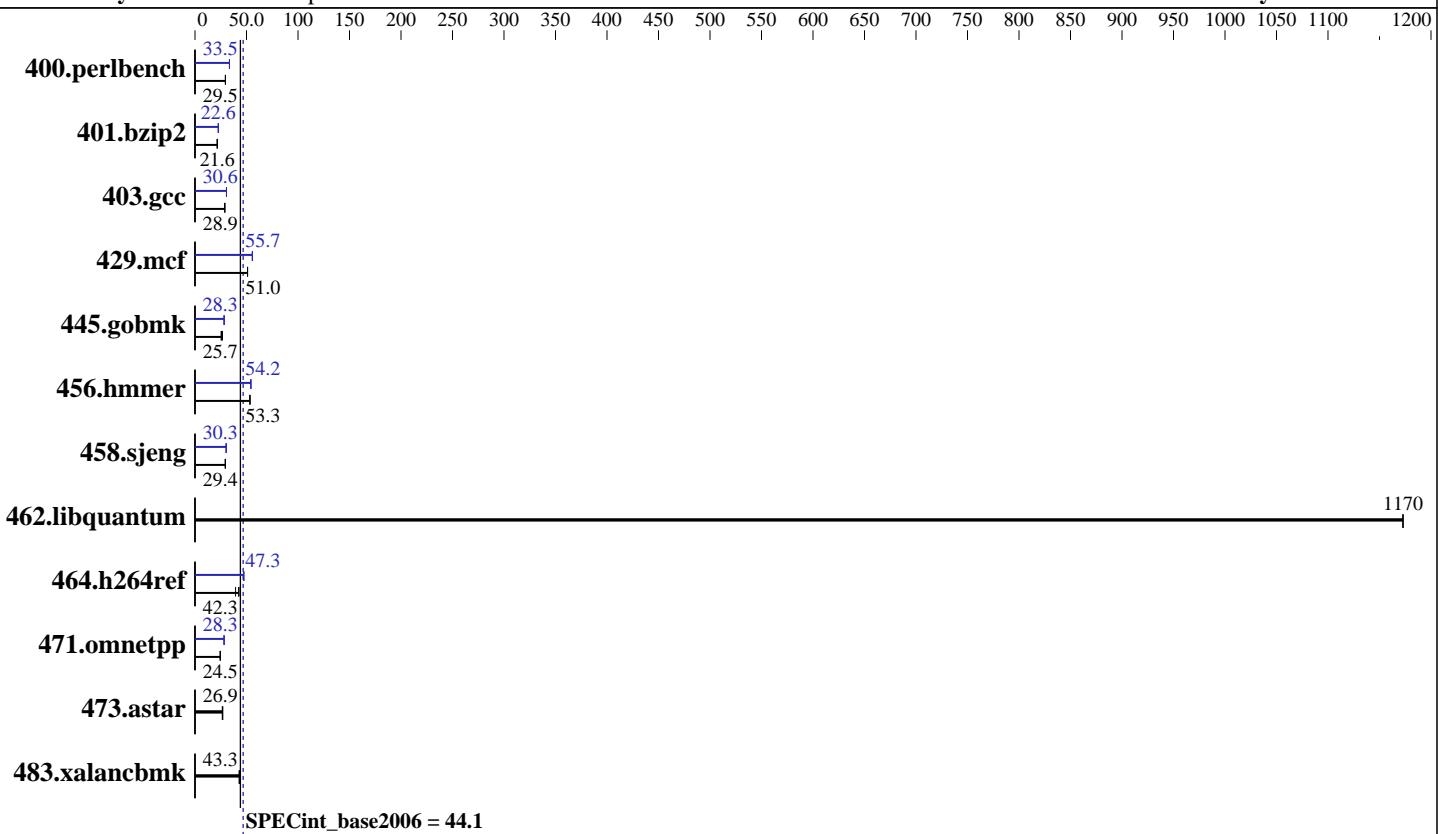

Hardware

CPU Name: Intel Xeon X5690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz
 CPU MHz: 3467
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M3 (Intel Xeon X5690)

SPECint2006 = 46.8

SPECint_base2006 = 44.1

CPU2006 license: 11

Test date: Feb-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	330	29.6	331	29.5	331	29.5	292	33.5	292	33.5	292	33.4
401.bzip2	446	21.6	447	21.6	446	21.6	426	22.6	426	22.6	426	22.6
403.gcc	279	28.8	279	28.9	277	29.0	263	30.6	263	30.6	263	30.6
429.mcf	179	51.0	179	51.0	179	51.0	163	55.8	164	55.7	164	55.7
445.gobmk	393	26.7	413	25.4	409	25.7	371	28.3	371	28.3	371	28.3
456.hmmer	175	53.3	175	53.4	175	53.3	172	54.2	172	54.2	172	54.2
458.sjeng	411	29.4	411	29.5	411	29.4	400	30.3	400	30.3	400	30.3
462.libquantum	17.7	1170	17.7	1170	17.7	1170	17.7	1170	17.7	1170	17.7	1170
464.h264ref	523	42.3	562	39.4	518	42.7	467	47.4	467	47.3	467	47.3
471.omnetpp	255	24.5	255	24.6	255	24.5	221	28.3	221	28.3	222	28.2
473.astar	265	26.5	261	26.9	261	26.9	265	26.5	261	26.9	261	26.9
483.xalancbmk	161	42.8	159	43.4	159	43.3	161	42.8	159	43.4	159	43.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

- Turbo Mode enabled in BIOS
- Turbo Boost set to Traditional in BIOS
- CPU C-State enabled in BIOS
- Data Reuse disabled in BIOS
- Demand Scrub disabled in BIOS

General Notes

OMP_NUM_THREADS set to number of cores
Binaries compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:
 icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 46.8

IBM System x3500 M3 (Intel Xeon X5690)

SPECint_base2006 = 44.1

CPU2006 license: 11

Test date: Feb-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m64`

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hammer: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
471.omnetpp: -DSPEC_CPU_LP64  
473.astar: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smarterheap -lsmarterheap64  
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECint2006 =	46.8
IBM System x3500 M3 (Intel Xeon X5690)	SPECint_base2006 =	44.1
CPU2006 license: 11	Test date:	Feb-2011
Test sponsor: IBM Corporation	Hardware Availability:	Feb-2011
Tested by: IBM Corporation	Software Availability:	Jan-2011

Peak Compiler Invocation (Continued)

429.mcf: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

471.omnetpp: `icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
 401.bzip2: `-DSPEC_CPU_LP64`
 403.gcc: `-DSPEC_CPU_LP64`
 456.hmmer: `-DSPEC_CPU_LP64`
 458.sjeng: `-DSPEC_CPU_LP64`
 462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
 473.astar: `-DSPEC_CPU_LP64`
 483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-opt-prefetch -ansi-alias`
`-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32`
`-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`
`-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

429.mcf: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-auto-ilp32 -ansi-alias`
`-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-auto-ilp32 -ansi-alias`
`-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECint2006 =	46.8
IBM System x3500 M3 (Intel Xeon X5690)	SPECint_base2006 =	44.1
CPU2006 license: 11	Test date:	Feb-2011
Test sponsor: IBM Corporation	Hardware Availability:	Feb-2011
Tested by: IBM Corporation	Software Availability:	Jan-2011

Peak Optimization Flags (Continued)

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
 -ansi-alias
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll12 -ansi-alias
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
 -L/smartheap -lsmartheap
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 46.8

IBM System x3500 M3 (Intel Xeon X5690)

SPECint_base2006 = 44.1

CPU2006 license: 11

Test date: Feb-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 15:36:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 March 2011.