



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 268

ProLiant DL385 G7
(2.6 GHz AMD Opteron 6140)

SPECfp_rate_base2006 = 242

CPU2006 license: 3


Test date: Jan-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

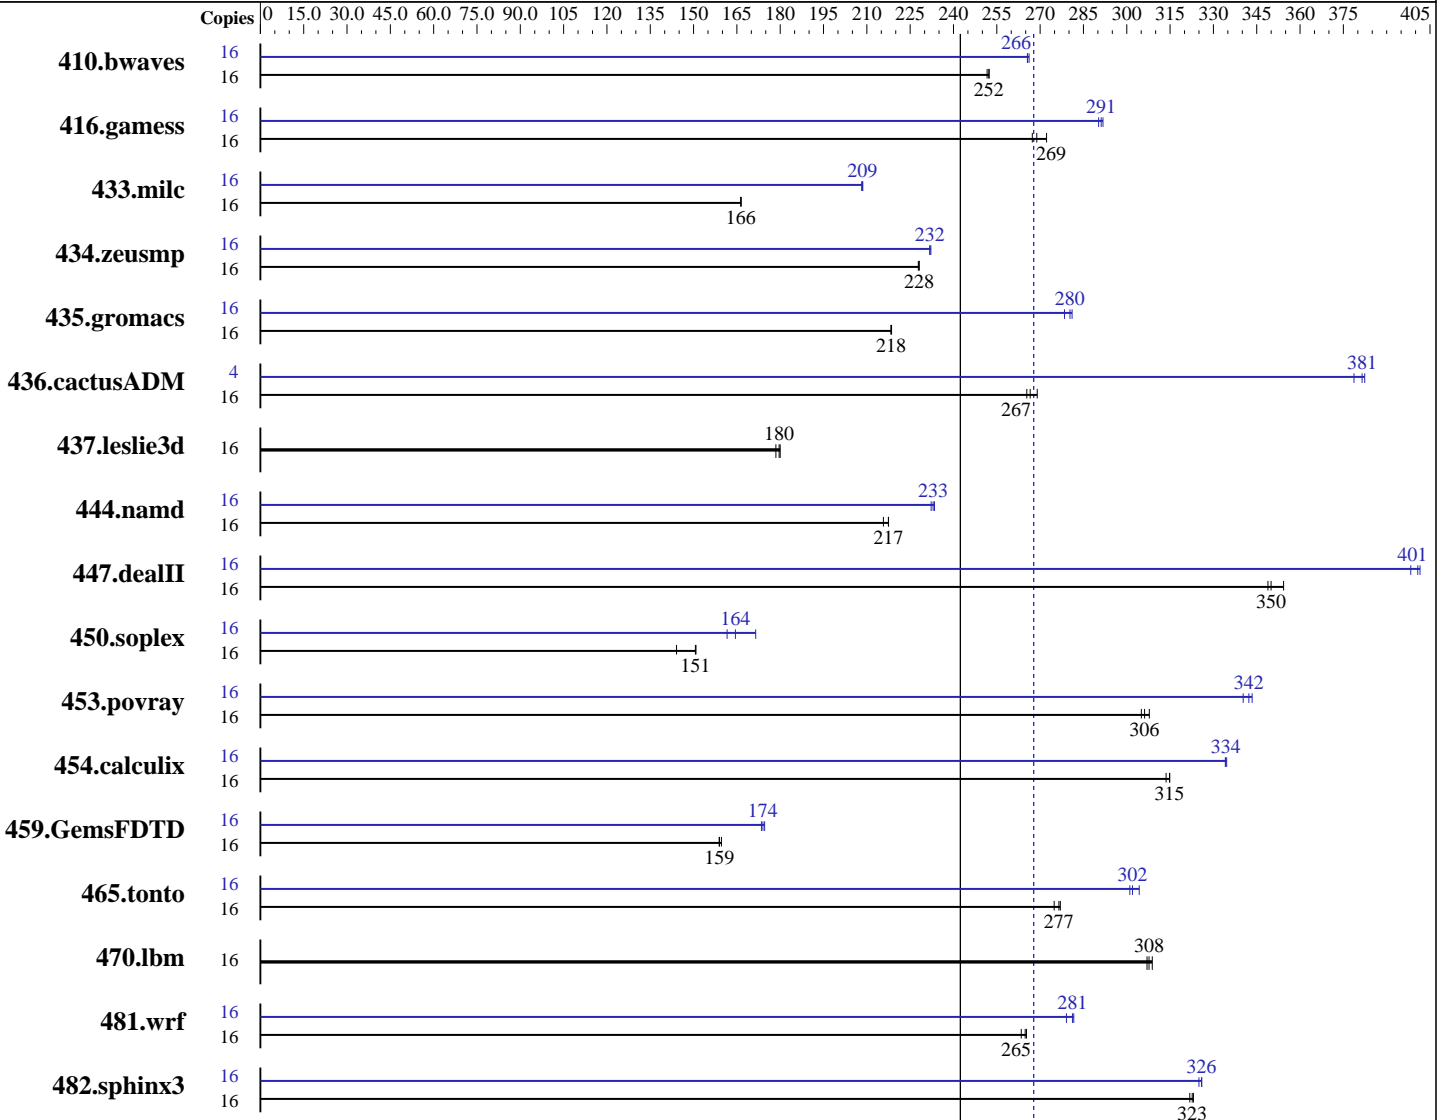

SPECfp_rate_base2006 = 242

SPECfp_rate2006 = 268

Hardware

CPU Name: AMD Opteron 6140
 CPU Characteristics: 2600
 CPU MHz: Integrated
 FPU: 16 cores, 2 chips, 8 cores/chip
 CPU(s) enabled: 1,2 chips
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 512 KB I+D on chip per core
 Secondary Cache:

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 268

ProLiant DL385 G7
(2.6 GHz AMD Opteron 6140)

SPECfp_rate_base2006 = 242

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2011
Hardware Availability: Feb-2011
Software Availability: Aug-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores
Other Cache: None
Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 146 GB 15 K SAS
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	864	252	862	252	862	252	16	817	266	819	266	819	266
416.gamess	16	1165	269	1151	272	1172	267	16	1079	290	1074	292	1076	291
433.milc	16	882	166	883	166	883	166	16	704	209	706	208	704	209
434.zeusmp	16	639	228	638	228	638	228	16	627	232	628	232	628	232
435.gromacs	16	523	218	523	218	523	219	16	410	278	406	281	408	280
436.cactusADM	16	720	265	717	267	711	269	4	125	381	125	382	126	379
437.leslie3d	16	843	179	837	180	836	180	16	843	179	837	180	836	180
444.namd	16	595	216	590	218	590	217	16	552	232	551	233	550	233
447.dealII	16	517	354	523	350	525	349	16	456	402	460	398	457	401
450.soplex	16	926	144	885	151	886	151	16	826	162	811	164	778	172
453.povray	16	278	306	277	308	279	305	16	249	342	250	340	248	343
454.calculix	16	419	315	421	314	419	315	16	395	334	395	334	395	335
459.GemsFDTD	16	1069	159	1063	160	1068	159	16	972	175	975	174	978	174
465.tonto	16	573	275	568	277	569	277	16	521	302	517	304	523	301
470.lbm	16	712	309	714	308	716	307	16	712	309	714	308	716	307
481.wrf	16	674	265	678	263	675	265	16	635	282	640	279	636	281
482.sphinx3	16	969	322	965	323	966	323	16	957	326	960	325	957	326

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 268

ProLiant DL385 G7
(2.6 GHz AMD Opteron 6140)

SPECfp_rate_base2006 = 242

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2011
Hardware Availability: Feb-2011
Software Availability: Aug-2010

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1002mc-rate-libs-revC/64:/cpu2006/amd1002mc-rate-libs-revC/32"
OMP_NUM_THREADS = "4"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
 opencc

C++ benchmarks:
 openCC

Fortran benchmarks:
 openf95

Benchmarks using both Fortran and C:
 opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 268

ProLiant DL385 G7
(2.6 GHz AMD Opteron 6140)

SPECfp_rate_base2006 = 242

CPU2006 license: 3

Test date: Jan-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 268

ProLiant DL385 G7
(2.6 GHz AMD Opteron 6140)

SPECfp_rate_base2006 = 242

CPU2006 license: 3

Test date: Jan-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

Peak Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
 -CG:local_sched_alg=1 -CG:locs_shallow_depth=1
 -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
 -CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
 -CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
 -CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
 -LNO:opt=0 -fno-emit-exceptions -m32
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
 -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
 -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
 -LNO:blocking=off -LNO:prefetch_ahead=5
 -LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 268

ProLiant DL385 G7
(2.6 GHz AMD Opteron 6140)

SPECfp_rate_base2006 = 242

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2011
Hardware Availability: Feb-2011
Software Availability: Aug-2010

Peak Optimization Flags (Continued)

410.bwaves (continued):

-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0

-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256

-HP:bdtd=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256

-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

437.leslie3d: basepeak = yes

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2

-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1

-HP

465.tonto: -march=barcelona -mso -Ofast

-OPT:alias=no_f90_pointer_alias -LNO:blocking=off

-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2

-HP:bdtd=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1

-HP:bdtd=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0

-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on

-LNO:prefetch_ahead=30 -WOPT:unroll=2

-GRA:optimize_boundary=on -HP:bdtd=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:prefetch_ahead=10 -LANG:copyinout=off

-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow

-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.6 GHz AMD Opteron 6140)

SPECfp_rate2006 = 268

SPECfp_rate_base2006 = 242

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:37:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2011.