



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 218**

PowerEdge R710 (Intel Xeon E5649, 2.53 GHz)

**SPECfp\_rate\_base2006 = 213**

CPU2006 license: 55


Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2010

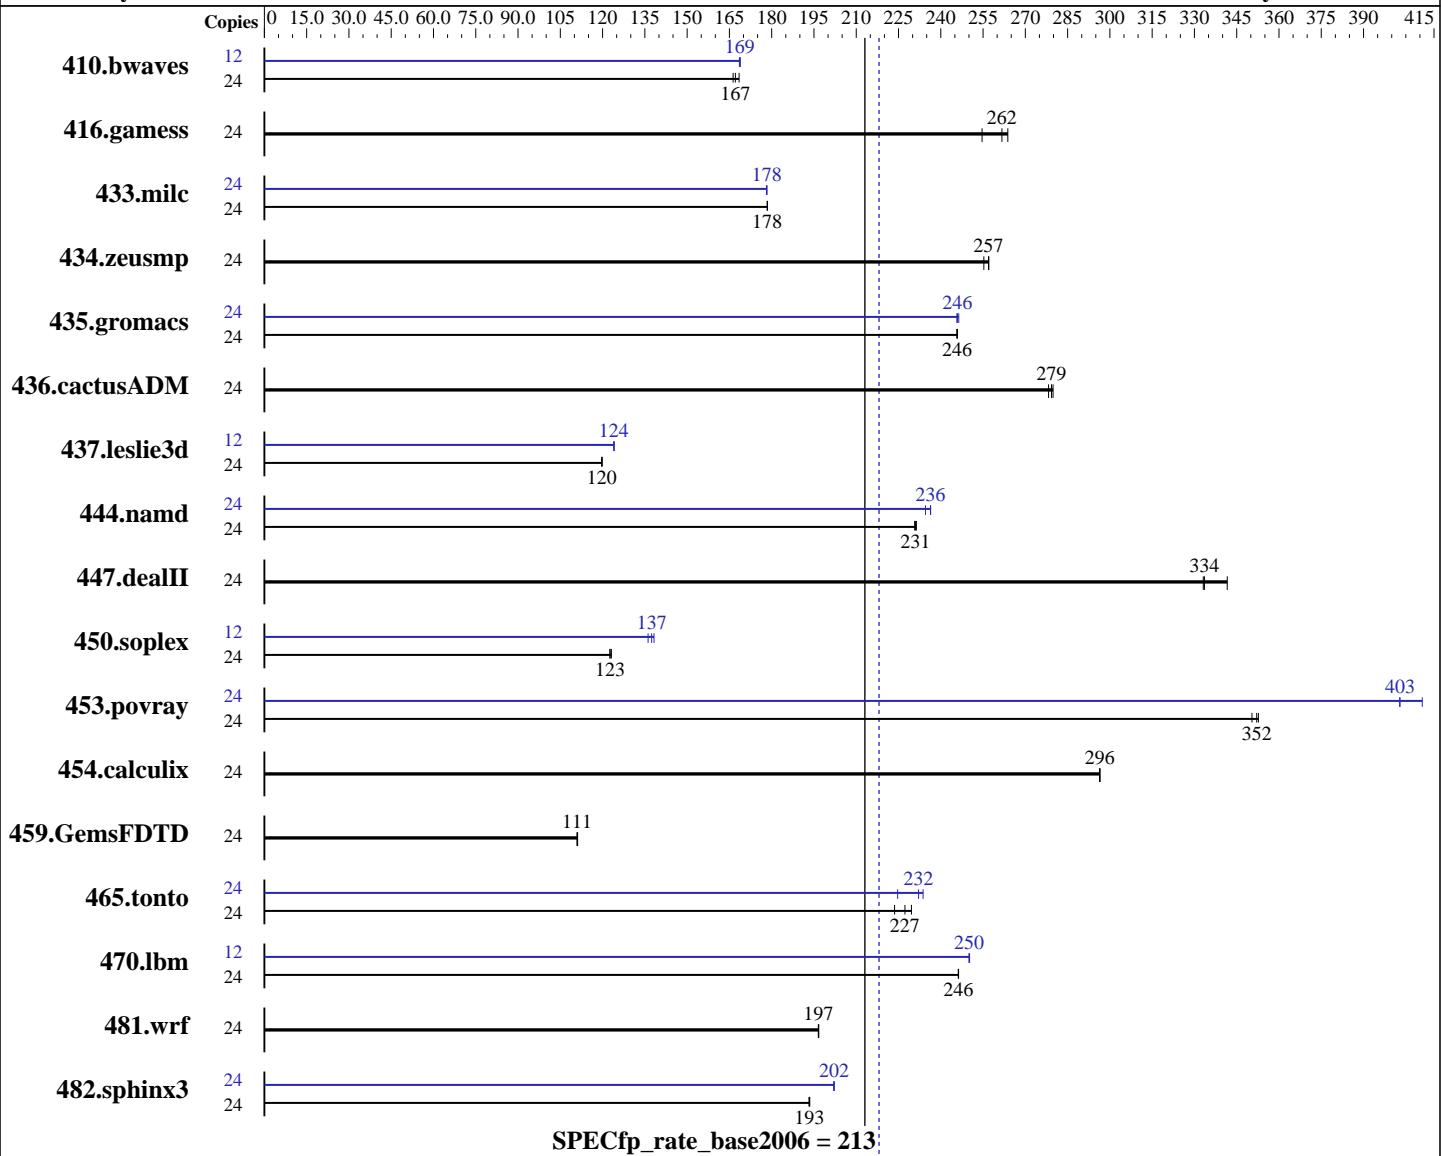

## Hardware

CPU Name: Intel Xeon E5649  
CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
CPU MHz: 2533  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 218**

PowerEdge R710 (Intel Xeon E5649, 2.53 GHz)

**SPECfp\_rate\_base2006 = 213**

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 146 GB 10000 RPM SAS  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1961	166	<b>1952</b>	<b>167</b>	1936	168	12	966	169	<b>966</b>	<b>169</b>	968	169
416.gamess	24	1845	255	<b>1796</b>	<b>262</b>	1781	264	24	1845	255	<b>1796</b>	<b>262</b>	1781	264
433.milc	24	1234	178	1235	178	<b>1235</b>	<b>178</b>	24	1236	178	<b>1236</b>	<b>178</b>	1237	178
434.zeusmp	24	856	255	<b>850</b>	<b>257</b>	850	257	24	856	255	<b>850</b>	<b>257</b>	850	257
435.gromacs	24	<b>697</b>	<b>246</b>	697	246	697	246	24	695	246	697	246	<b>697</b>	<b>246</b>
436.cactusADM	24	1031	278	<b>1027</b>	<b>279</b>	1025	280	24	1031	278	<b>1027</b>	<b>279</b>	1025	280
437.leslie3d	24	1885	120	<b>1884</b>	<b>120</b>	1882	120	12	909	124	910	124	<b>909</b>	<b>124</b>
444.namd	24	<b>833</b>	<b>231</b>	832	231	834	231	24	<b>814</b>	<b>236</b>	814	236	821	235
447.dealII	24	<b>823</b>	<b>334</b>	824	333	804	342	24	<b>823</b>	<b>334</b>	824	333	804	342
450.soplex	24	<b>1632</b>	<b>123</b>	1626	123	1633	123	12	<b>735</b>	<b>136</b>	<b>728</b>	<b>137</b>	724	138
453.povray	24	<b>363</b>	<b>352</b>	364	350	362	353	24	<b>317</b>	<b>403</b>	<b>317</b>	<b>403</b>	311	411
454.calculix	24	<b>668</b>	<b>296</b>	668	296	668	296	24	<b>668</b>	<b>296</b>	668	296	668	296
459.GemsFDTD	24	<b>2294</b>	<b>111</b>	2291	111	2295	111	24	<b>2294</b>	<b>111</b>	2291	111	2295	111
465.tonto	24	1029	230	1056	224	<b>1039</b>	<b>227</b>	24	1051	225	<b>1017</b>	<b>232</b>	1010	234
470.lbm	24	1339	246	<b>1339</b>	<b>246</b>	1339	246	12	<b>659</b>	<b>250</b>	659	250	<b>659</b>	<b>250</b>
481.wrf	24	1364	197	<b>1363</b>	<b>197</b>	1363	197	24	1364	197	<b>1363</b>	<b>197</b>	1363	197
482.sphinx3	24	2421	193	2417	194	<b>2419</b>	<b>193</b>	24	2313	202	<b>2314</b>	<b>202</b>	2315	202

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710 (Intel Xeon E5649, 2.53 GHz)

**SPECfp\_rate2006 = 218**

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2010

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

Data Reuse = Disabled (Default = Enabled)

## General Notes

The Dell PowerEdge R710 and  
the Bull NovaScale R460 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge R710 model.  
Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
    434.zeusmp: -DSPEC\_CPU\_LP64  
    435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
    437.leslie3d: -DSPEC\_CPU\_LP64  
        444.namd: -DSPEC\_CPU\_LP64  
        447.dealII: -DSPEC\_CPU\_LP64  
        450.soplex: -DSPEC\_CPU\_LP64  
        453.povray: -DSPEC\_CPU\_LP64  
    454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
    465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
        481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710 (Intel Xeon E5649, 2.53 GHz)

**SPECfp\_rate2006 = 218**

CPU2006 license: 55

**Test date:** Mar-2011

Test sponsor: Dell Inc.

**Hardware Availability:** Feb-2011

Tested by: Dell Inc.

**Software Availability:** Jan-2010

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710 (Intel Xeon E5649, 2.53 GHz)

**SPECfp\_rate2006 = 218**

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2010

**SPECfp\_rate\_base2006 = 213**

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710 (Intel Xeon E5649, 2.53 GHz)

**SPECfp\_rate2006 = 218**

CPU2006 license: 55

**Test date:** Mar-2011

Test sponsor: Dell Inc.

**Hardware Availability:** Feb-2011

Tested by: Dell Inc.

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

465.tonto (continued):

```
-B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
              -static -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 15:58:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 March 2011.