



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®2006 = **65.7**

PRIMERGY RX300 S6, Intel Xeon X5687, 3.60 GHz

SPECfp_base2006 = **62.0**

CPU2006 license: 19


Test date: Mar-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Apr-2011

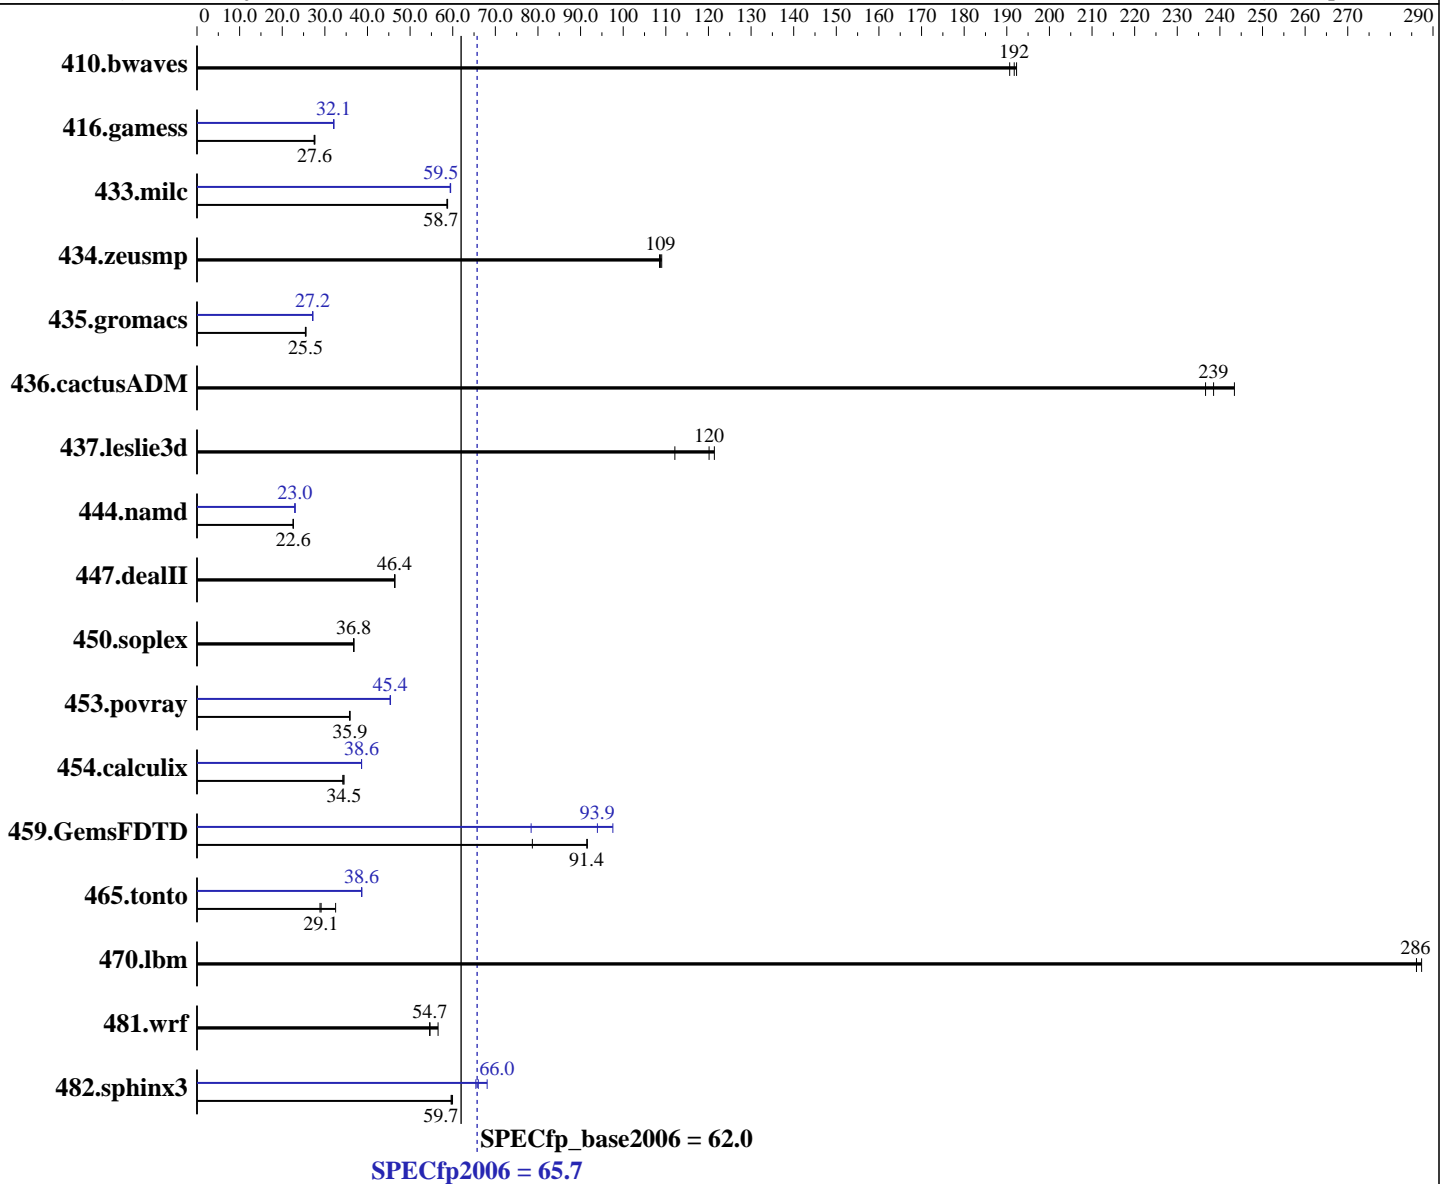

Hardware

CPU Name: Intel Xeon X5687
 CPU Characteristics: Intel Turbo Boost Technology up to 3.87 GHz
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = **65.7**

PRIMERGY RX300 S6, Intel Xeon X5687, 3.60 GHz

SPECfp_base2006 = **62.0**

CPU2006 license: 19

Test date: Mar-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Apr-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM
Other Hardware: --

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	71.3	191	70.7	192	70.9	192	71.3	191	70.7	192	70.9	192
416.gamess	709	27.6	712	27.5	708	27.6	611	32.1	610	32.1	611	32.1
433.milc	156	58.8	156	58.7	156	58.7	155	59.4	154	59.5	154	59.5
434.zeusmp	83.5	109	83.9	109	83.7	109	83.5	109	83.9	109	83.7	109
435.gromacs	279	25.6	280	25.5	281	25.4	263	27.2	263	27.2	263	27.1
436.cactusADM	50.5	237	50.1	239	49.1	243	50.5	237	50.1	239	49.1	243
437.leslie3d	78.2	120	77.4	121	83.8	112	78.2	120	77.4	121	83.8	112
444.namd	355	22.6	355	22.6	355	22.6	349	23.0	349	23.0	349	23.0
447.dealII	246	46.4	247	46.3	247	46.4	246	46.4	247	46.3	247	46.4
450.soplex	226	36.8	227	36.8	227	36.7	226	36.8	227	36.8	227	36.7
453.povray	148	35.9	148	35.9	149	35.8	117	45.4	117	45.3	117	45.4
454.calculix	241	34.2	239	34.5	239	34.5	214	38.6	214	38.6	214	38.6
459.GemsFDTD	135	78.7	116	91.4	116	91.6	113	93.9	109	97.6	135	78.4
465.tonto	303	32.5	338	29.1	341	28.9	255	38.6	255	38.6	255	38.7
470.lbm	48.0	286	48.0	286	47.8	287	48.0	286	48.0	286	47.8	287
481.wrf	197	56.6	204	54.7	205	54.6	197	56.6	204	54.7	205	54.6
482.sphinx3	325	60.0	327	59.7	327	59.7	295	66.0	286	68.1	298	65.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodenv /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS configuration:
Data Reuse Optimization = Disable
Intel HT Technology = Disable



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 65.7

PRIMERGY RX300 S6, Intel Xeon X5687, 3.60 GHz

SPECfp_base2006 = 62.0

CPU2006 license: 19

Test date: Mar-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Apr-2011

General Notes

OMP_NUM_THREADS set to number of cores

This result was measured on the PRIMERGY TX300 S6. The PRIMERGY TX300 S6 and the PRIMERGY RX300 S6 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

Binaries were compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

Submitted_by: "Klassen, Peter" <peter.klassen@ts.fujitsu.com>

Submitted: Mon Mar 28 12:08:25 EDT 2011

Submission: cpu2006-20110328-15258.sub

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 65.7

PRIMERGY RX300 S6, Intel Xeon X5687, 3.60 GHz

SPECfp_base2006 = 62.0

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 65.7

PRIMERGY RX300 S6, Intel Xeon X5687, 3.60 GHz

SPECfp_base2006 = 62.0

CPU2006 license: 19

Test date: Mar-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 65.7

PRIMERGY RX300 S6, Intel Xeon X5687, 3.60 GHz

SPECfp_base2006 = 62.0

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Apr-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 19:45:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 April 2011.