



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

### SPECfp®\_rate2006 = 219

### IBM System x3650 M3 (Intel Xeon E5649)

### SPECfp\_rate\_base2006 = 213

CPU2006 license: 11


Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

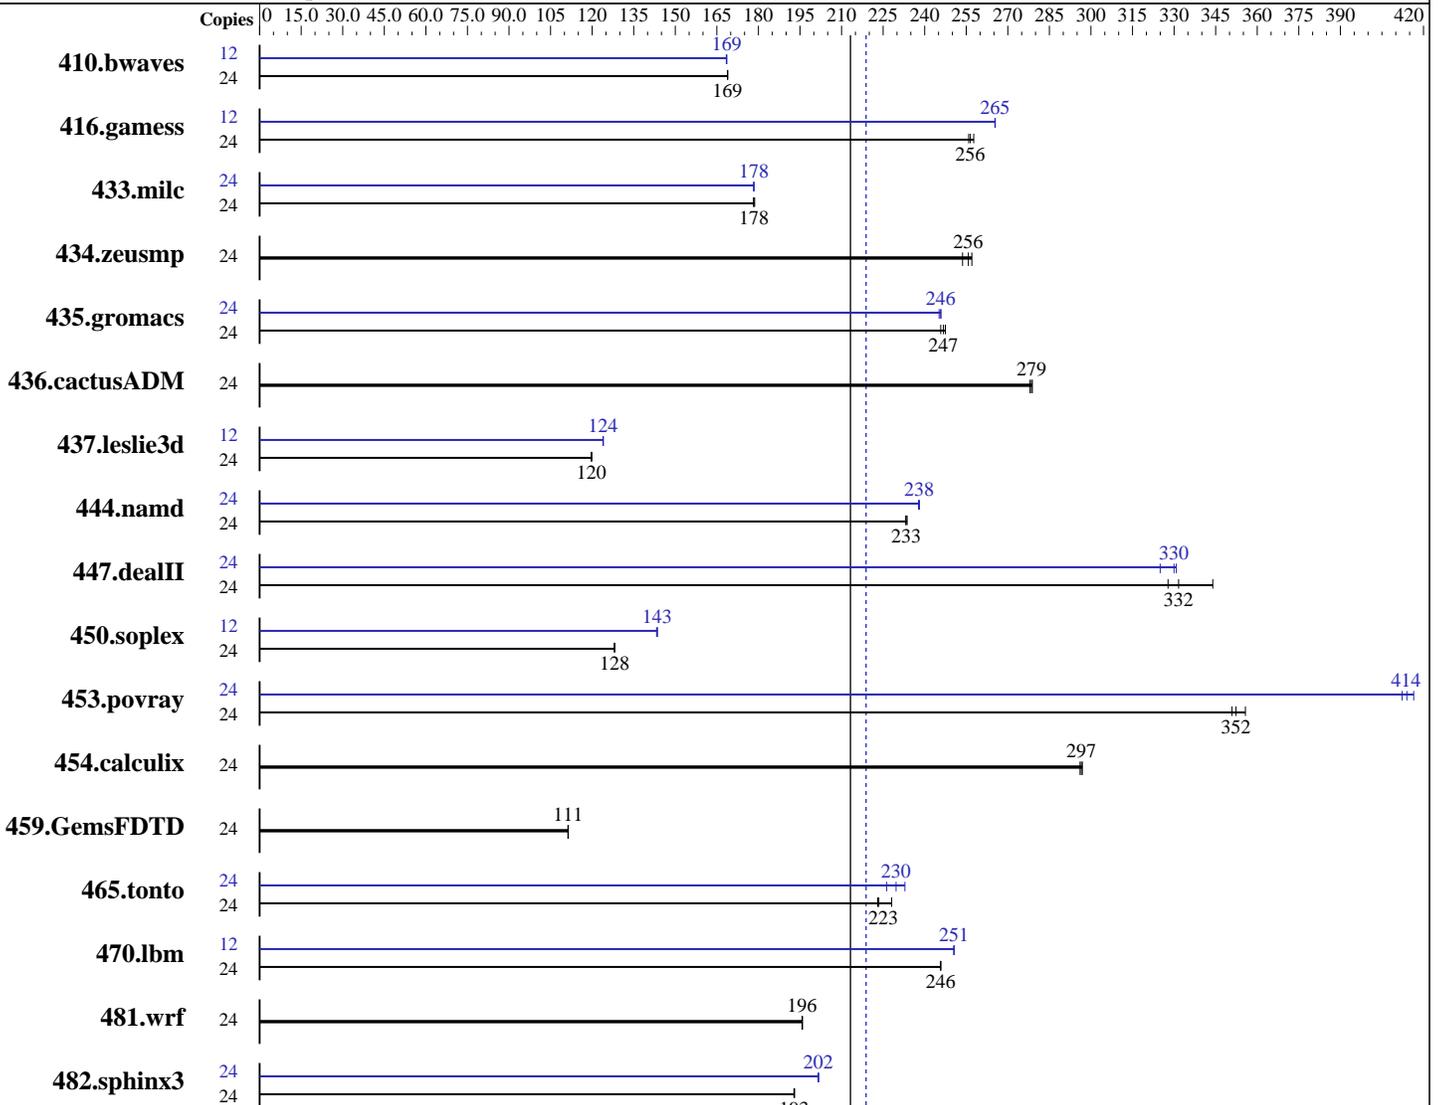

SPECfp\_rate\_base2006 = 213

SPECfp\_rate2006 = 219

#### Hardware

CPU Name: Intel Xeon E5649  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp\_rate2006 = 219

## IBM System x3650 M3 (Intel Xeon E5649)

SPECfp\_rate\_base2006 = 213

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<u>1932</u>	<u>169</u>	1931	169	1932	169	12	968	168	967	169	<u>968</u>	<u>169</u>
416.gamess	24	<u>1832</u>	<u>256</u>	1823	258	1837	256	12	885	265	<u>885</u>	<u>265</u>	886	265
433.milc	24	1233	179	<u>1235</u>	<u>178</u>	1236	178	24	1235	178	1236	178	<u>1235</u>	<u>178</u>
434.zeusmp	24	<u>854</u>	<u>256</u>	850	257	861	254	24	<u>854</u>	<u>256</u>	850	257	861	254
435.gromacs	24	<u>694</u>	<u>247</u>	697	246	692	247	24	699	245	<u>697</u>	<u>246</u>	697	246
436.cactusADM	24	1029	279	<u>1030</u>	<u>279</u>	1032	278	24	1029	279	<u>1030</u>	<u>279</u>	1032	278
437.leslie3d	24	1882	120	<u>1884</u>	<u>120</u>	1885	120	12	<u>910</u>	<u>124</u>	909	124	910	124
444.namd	24	<u>825</u>	<u>233</u>	824	234	826	233	24	810	238	<u>809</u>	<u>238</u>	808	238
447.dealII	24	<u>828</u>	<u>332</u>	838	328	798	344	24	<u>832</u>	<u>330</u>	845	325	830	331
450.soplex	24	1562	128	1564	128	<u>1562</u>	<u>128</u>	12	699	143	<u>697</u>	<u>143</u>	697	144
453.povray	24	<u>362</u>	<u>352</u>	364	351	359	356	24	<u>308</u>	<u>414</u>	307	416	310	412
454.calculix	24	667	297	669	296	<u>668</u>	<u>297</u>	24	667	297	669	296	<u>668</u>	<u>297</u>
459.GemsFDTD	24	2285	111	<u>2288</u>	<u>111</u>	2288	111	24	2285	111	<u>2288</u>	<u>111</u>	2288	111
465.tonto	24	1059	223	1035	228	<u>1057</u>	<u>223</u>	24	1044	226	<u>1028</u>	<u>230</u>	1014	233
470.lbm	24	1341	246	1342	246	<u>1342</u>	<u>246</u>	12	658	251	658	251	<u>658</u>	<u>251</u>
481.wrf	24	1370	196	<u>1369</u>	<u>196</u>	1369	196	24	1370	196	<u>1369</u>	<u>196</u>	1369	196
482.sphinx3	24	2426	193	2423	193	<u>2425</u>	<u>193</u>	24	2319	202	2320	202	<u>2320</u>	<u>202</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

### Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 219

IBM System x3650 M3 (Intel Xeon E5649)

SPECfp\_rate\_base2006 = 213

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Platform Notes

Turbo Mode enabled in BIOS  
Turbo Boost set to Traditional in BIOS  
Power C-State enabled in BIOS  
Data Reuse disabled in BIOS  
Demand Scrub disabled in BIOS

## General Notes

Binaries compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 219

IBM System x3650 M3 (Intel Xeon E5649)

SPECfp\_rate\_base2006 = 213

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 219

IBM System x3650 M3 (Intel Xeon E5649)

SPECfp\_rate\_base2006 = 213

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 219

IBM System x3650 M3 (Intel Xeon E5649)

SPECfp\_rate\_base2006 = 213

CPU2006 license: 11

Test date: Apr-2011

Test sponsor: IBM Corporation

Hardware Availability: Feb-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110420.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 20:58:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 May 2011.