



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp<sup>®</sup>\_rate2006 = **637**

ProLiant DL585 G7  
(2.3 GHz AMD Opteron 6176)

SPECfp\_rate\_base2006 = **585**

CPU2006 license: 3


Test date: May-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

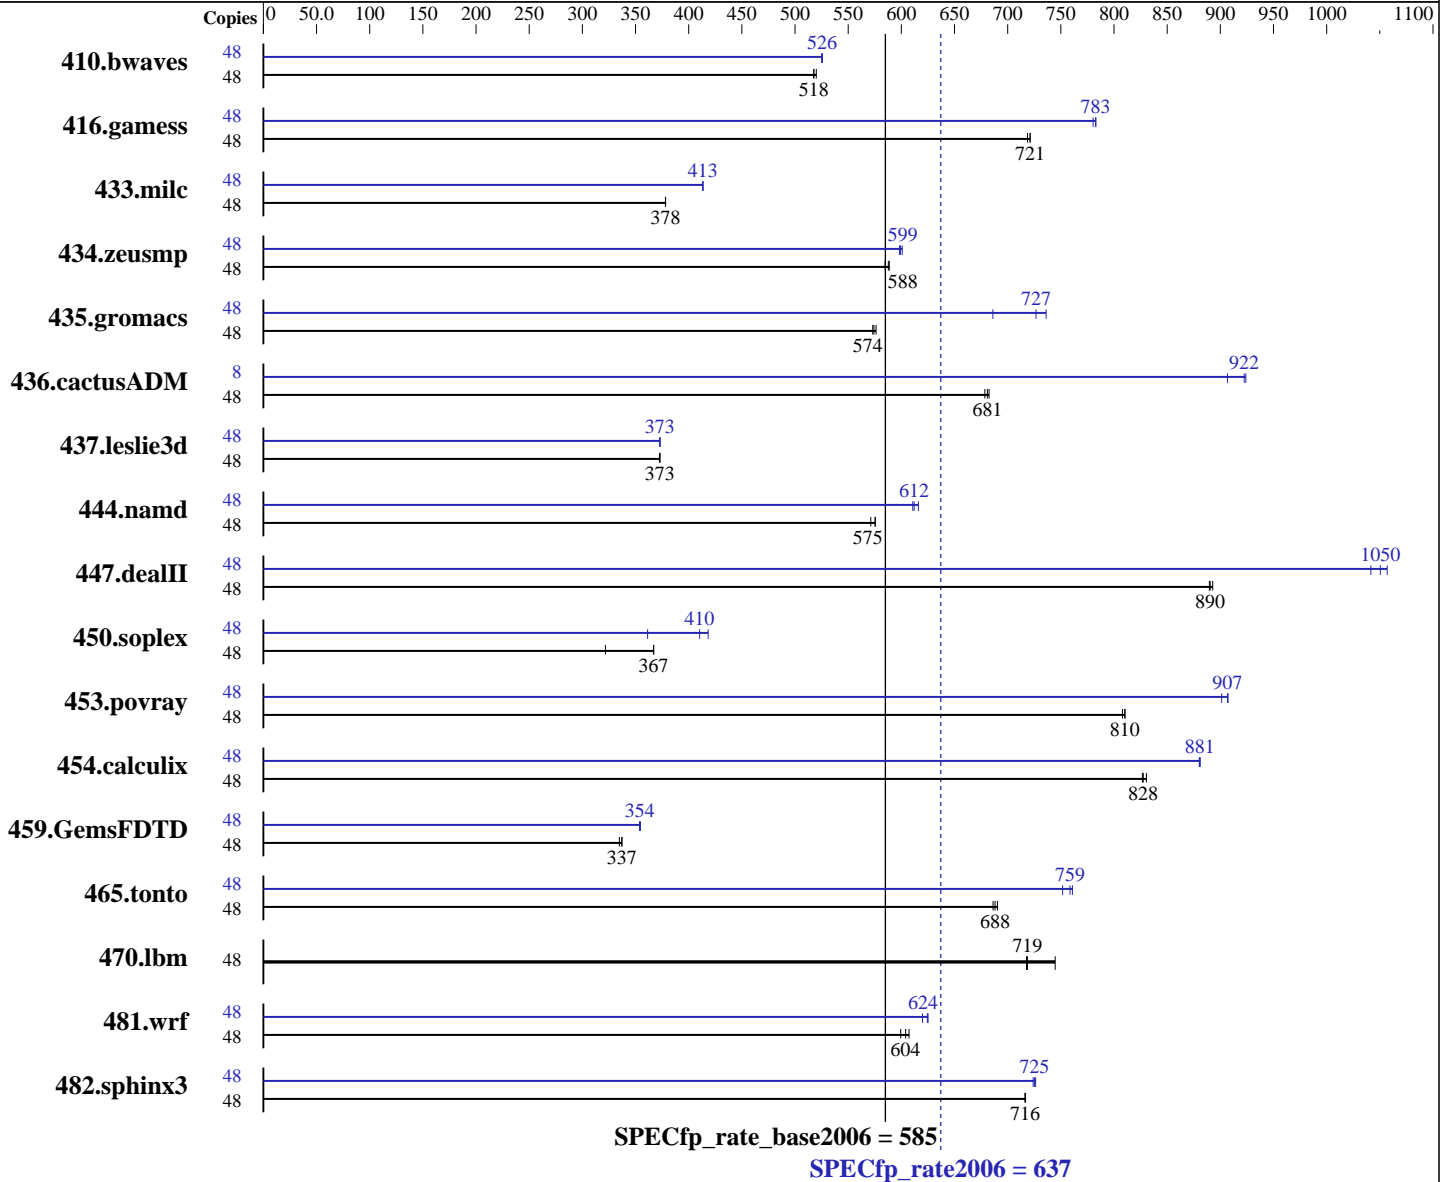

### Hardware

CPU Name: AMD Opteron 6176  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = **637**

ProLiant DL585 G7  
(2.3 GHz AMD Opteron 6176)

SPECfp\_rate\_base2006 = **585**

CPU2006 license: 3

Test date: May-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
Other Cache: None  
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 2 x 146 GB 10 K SAS  
Other Hardware: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1260	518	1254	520	<b>1260</b>	<b>518</b>	48	1242	525	<b>1241</b>	<b>526</b>	1241	526
416.gamess	48	<b>1303</b>	<b>721</b>	1303	721	1308	719	48	<b>1201</b>	<b>783</b>	1200	783	1204	780
433.milc	48	<b>1165</b>	<b>378</b>	1165	378	1165	378	48	1066	413	<b>1066</b>	<b>413</b>	1065	414
434.zeusmp	48	742	589	<b>743</b>	<b>588</b>	747	585	48	727	601	730	598	<b>729</b>	<b>599</b>
435.gromacs	48	<b>597</b>	<b>574</b>	595	576	598	573	48	500	686	466	736	<b>472</b>	<b>727</b>
436.cactusADM	48	840	682	<b>842</b>	<b>681</b>	845	679	8	103	924	105	907	<b>104</b>	<b>922</b>
437.leslie3d	48	1210	373	1211	373	<b>1210</b>	<b>373</b>	48	1211	373	1209	373	<b>1210</b>	<b>373</b>
444.namd	48	674	571	<b>669</b>	<b>575</b>	669	575	48	<b>629</b>	<b>612</b>	630	611	625	616
447.dealII	48	615	893	<b>617</b>	<b>890</b>	617	890	48	<b>523</b>	<b>1050</b>	520	1060	527	1040
450.soplex	48	1244	322	1090	367	<b>1091</b>	<b>367</b>	48	1108	361	<b>976</b>	<b>410</b>	957	418
453.povray	48	316	808	<b>315</b>	<b>810</b>	315	810	48	283	901	281	907	<b>282</b>	<b>907</b>
454.calculix	48	477	830	479	827	<b>479</b>	<b>828</b>	48	449	881	<b>450</b>	<b>881</b>	450	880
459.GemsFDTD	48	1510	337	1521	335	<b>1510</b>	<b>337</b>	48	<b>1438</b>	<b>354</b>	1439	354	1436	355
465.tonto	48	688	686	684	690	<b>686</b>	<b>688</b>	48	621	761	<b>623</b>	<b>759</b>	628	752
470.lbm	48	886	745	<b>918</b>	<b>719</b>	919	718	48	886	745	<b>918</b>	<b>719</b>	919	718
481.wrf	48	895	599	883	607	<b>888</b>	<b>604</b>	48	865	620	<b>859</b>	<b>624</b>	858	625
482.sphinx3	48	1305	717	<b>1306</b>	<b>716</b>	1306	716	48	1288	726	1292	724	<b>1290</b>	<b>725</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=21600 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 637

ProLiant DL585 G7  
(2.3 GHz AMD Opteron 6176)

SPECfp\_rate\_base2006 = 585

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** May-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Aug-2010

### Platform Notes

BIOS Configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling

### General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/cpu2006/amd1002mc-rate-libs-revC/64:/cpu2006/amd1002mc-rate-libs-revC/32"  
OMP\_NUM\_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

### Base Compiler Invocation

C benchmarks:  
  opencc  
  
C++ benchmarks:  
  openCC  
  
Fortran benchmarks:  
  openf95  
  
Benchmarks using both Fortran and C:  
  opencc openf95

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
  433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.lelie3d: -DSPEC\_CPU\_LP64  
  444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
  465.tonto: -DSPEC\_CPU\_LP64  
  470.lbm: -DSPEC\_CPU\_LP64  
  481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
  -fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 637**

ProLiant DL585 G7  
(2.3 GHz AMD Opteron 6176)

**SPECfp\_rate\_base2006 = 585**

**CPU2006 license:** 3

**Test date:** May-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Aug-2010

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-OPT:malloc\_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m -HP

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64

436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 637

ProLiant DL585 G7  
(2.3 GHz AMD Opteron 6176)

SPECfp\_rate\_base2006 = 585

CPU2006 license: 3

Test date: May-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

## Peak Portability Flags (Continued)

459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
 -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1  
 -CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
 -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
 -CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
 -CG:local\_sched\_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
 -CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
 -OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
 -LNO:opt=0 -fno-emit-exceptions -m32  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
 -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
 -CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on  
 -LNO:blocking=off -LNO:prefetch\_ahead=5  
 -LNO:ignore\_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 637**

ProLiant DL585 G7  
(2.3 GHz AMD Opteron 6176)

**SPECfp\_rate\_base2006 = 585**

**CPU2006 license:** 3

**Test date:** May-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Aug-2010

## Peak Optimization Flags (Continued)

410.bwaves (continued):

-CG:cmp\_peep=on

416.gamess: -march=barcelona -mso -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0

-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:interchange=off -OPT:treeheight=on -OPT:unroll\_size=256

-CG:cmp\_peep=on -GRA:prioritize\_by\_density=on -HP

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2

-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1

-HP

465.tonto: -march=barcelona -mso -Ofast

-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off

-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch\_ahead=1

-HP:bdt=2m:heap=2m -LANG:heap\_allocation\_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load\_exe=0

-CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2 -CG:compute\_to=on

-LNO:prefetch\_ahead=30 -WOPT:unroll=2

-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:prefetch\_ahead=10 -LANG:copyinout=off

-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on -m3dnow

-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

ProLiant DL585 G7  
(2.3 GHz AMD Opteron 6176)

**SPECfp\_rate2006 = 637**

**SPECfp\_rate\_base2006 = 585**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** May-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Aug-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 20:16:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 May 2011.