



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp®\_rate2006 = 107

PRIMERGY TX120 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp\_rate\_base2006 = 106

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

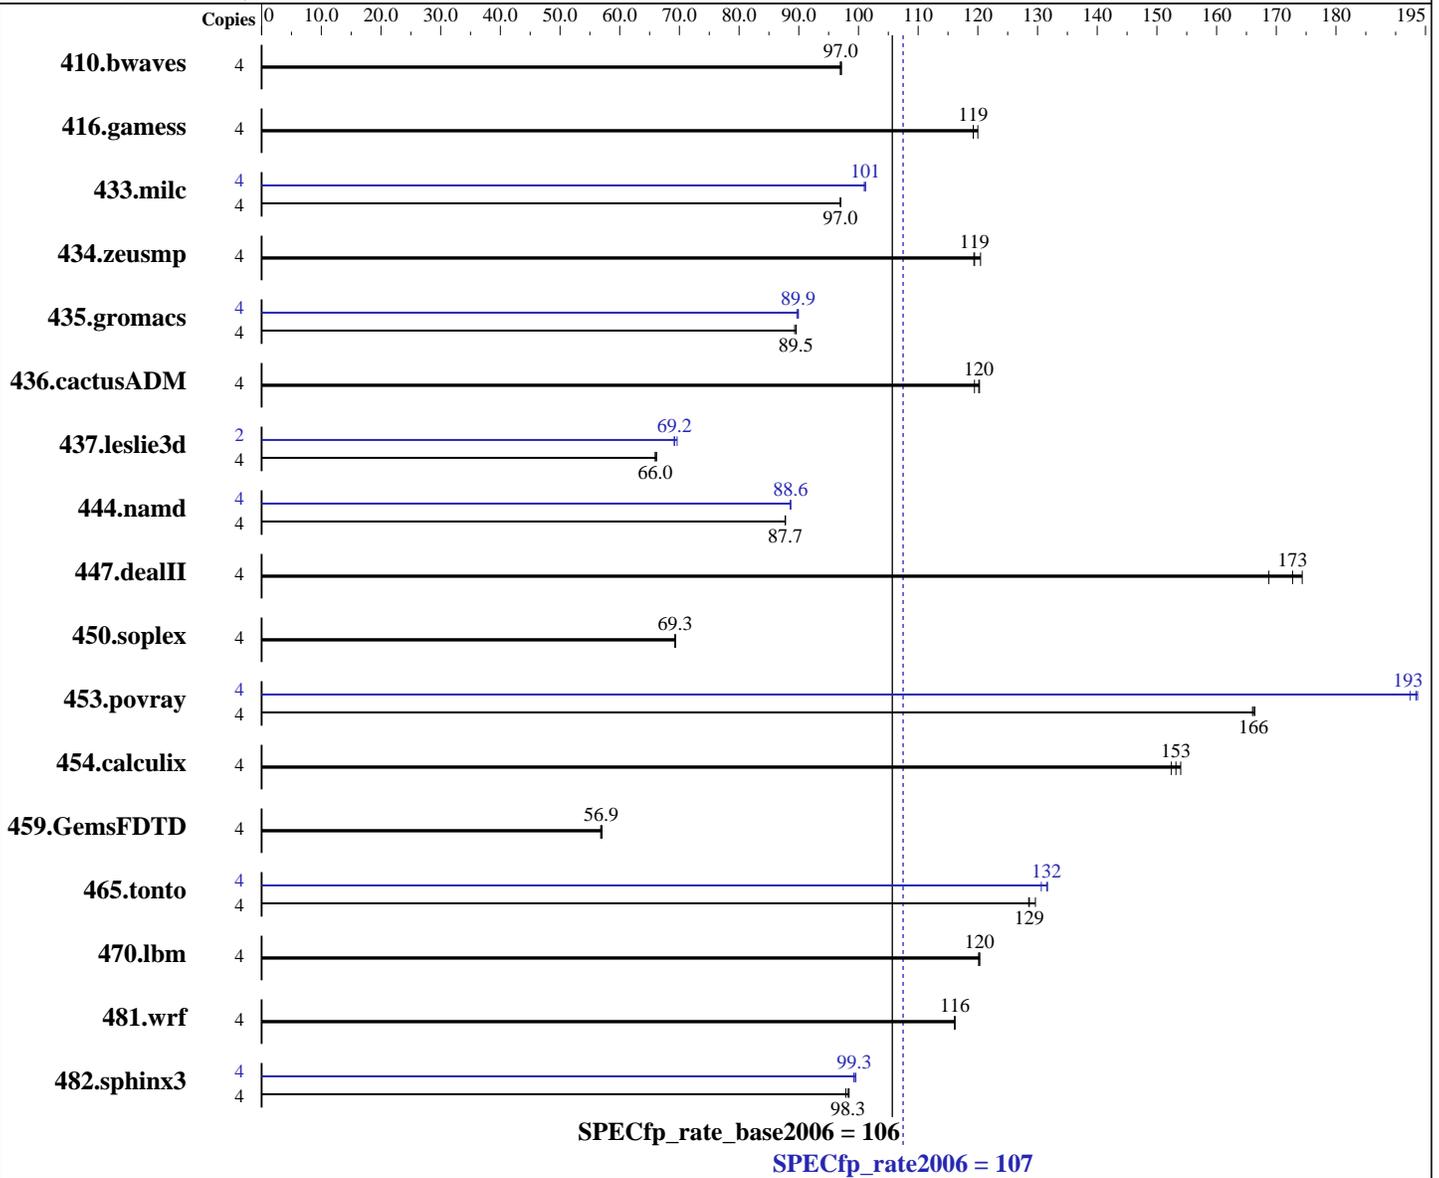

### Hardware

CPU Name: Intel Xeon E3-1220  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 107

PRIMERGY TX120 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp\_rate\_base2006 = 106

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)  
Disk Subsystem: 1 x SATA, 300 GB, 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	559	97.2	561	97.0	<b>560</b>	<b>97.0</b>	4	559	97.2	561	97.0	<b>560</b>	<b>97.0</b>
416.gamess	4	<b>657</b>	<b>119</b>	657	119	653	120	4	<b>657</b>	<b>119</b>	657	119	653	120
433.milc	4	378	97.0	<b>379</b>	<b>97.0</b>	379	97.0	4	363	101	<b>363</b>	<b>101</b>	364	101
434.zeusmp	4	<b>305</b>	<b>119</b>	305	119	302	120	4	<b>305</b>	<b>119</b>	305	119	302	120
435.gromacs	4	320	89.3	<b>319</b>	<b>89.5</b>	319	89.6	4	318	89.7	318	89.9	<b>318</b>	<b>89.9</b>
436.cactusADM	4	<b>398</b>	<b>120</b>	400	119	397	120	4	<b>398</b>	<b>120</b>	400	119	397	120
437.leslie3d	4	568	66.2	570	66.0	<b>570</b>	<b>66.0</b>	2	272	69.1	<b>272</b>	<b>69.2</b>	270	69.6
444.namd	4	<b>366</b>	<b>87.7</b>	366	87.7	366	87.7	4	<b>362</b>	<b>88.6</b>	362	88.6	362	88.6
447.dealII	4	262	174	271	169	<b>265</b>	<b>173</b>	4	262	174	271	169	<b>265</b>	<b>173</b>
450.soplex	4	481	69.3	<b>482</b>	<b>69.3</b>	482	69.3	4	481	69.3	<b>482</b>	<b>69.3</b>	482	69.3
453.povray	4	128	166	<b>128</b>	<b>166</b>	128	166	4	111	192	<b>110</b>	<b>193</b>	110	194
454.calculix	4	214	154	<b>215</b>	<b>153</b>	217	152	4	214	154	<b>215</b>	<b>153</b>	217	152
459.GemsFDTD	4	747	56.8	744	57.0	<b>746</b>	<b>56.9</b>	4	747	56.8	744	57.0	<b>746</b>	<b>56.9</b>
465.tonto	4	306	129	<b>306</b>	<b>129</b>	304	130	4	301	131	299	132	<b>299</b>	<b>132</b>
470.lbm	4	458	120	457	120	<b>457</b>	<b>120</b>	4	458	120	457	120	<b>457</b>	<b>120</b>
481.wrf	4	<b>385</b>	<b>116</b>	385	116	385	116	4	<b>385</b>	<b>116</b>	385	116	385	116
482.sphinx3	4	796	97.9	<b>793</b>	<b>98.3</b>	792	98.4	4	<b>785</b>	<b>99.3</b>	783	99.6	786	99.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
Large pages were not enabled for this run

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
This result was measured on the PRIMERGY TX120 S3. The PRIMERGY TX120 S3  
and the PRIMERGY TX140 S1 are electronically equivalent.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 107**

PRIMERGY TX120 S3, Intel Xeon E3-1220, 3.10 GHz

**SPECfp\_rate\_base2006 = 106**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** May-2011  
**Hardware Availability:** Jun-2011  
**Software Availability:** Jan-2011

## General Notes (Continued)

Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 107

PRIMERGY TX120 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp\_rate\_base2006 = 106

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: May-2011  
Hardware Availability: Jun-2011  
Software Availability: Jan-2011

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 107

PRIMERGY TX120 S3, Intel Xeon E3-1220, 3.10 GHz

SPECfp\_rate\_base2006 = 106

CPU2006 license: 19

Test date: May-2011

Test sponsor: Fujitsu

Hardware Availability: Jun-2011

Tested by: Fujitsu

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECfp\_rate2006 = 107**

PRIMERGY TX120 S3, Intel Xeon E3-1220, 3.10 GHz

**SPECfp\_rate\_base2006 = 106**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** May-2011

**Hardware Availability:** Jun-2011

**Software Availability:** Jan-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 18:22:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 June 2011.