



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp®\_rate2006 = 178

Servidor Itaotec MX224 (Intel Xeon E5620)

SPECfp\_rate\_base2006 = 173

CPU2006 license: 9001


Test sponsor: Itaotec

Tested by: Itaotec

Test date: Jul-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

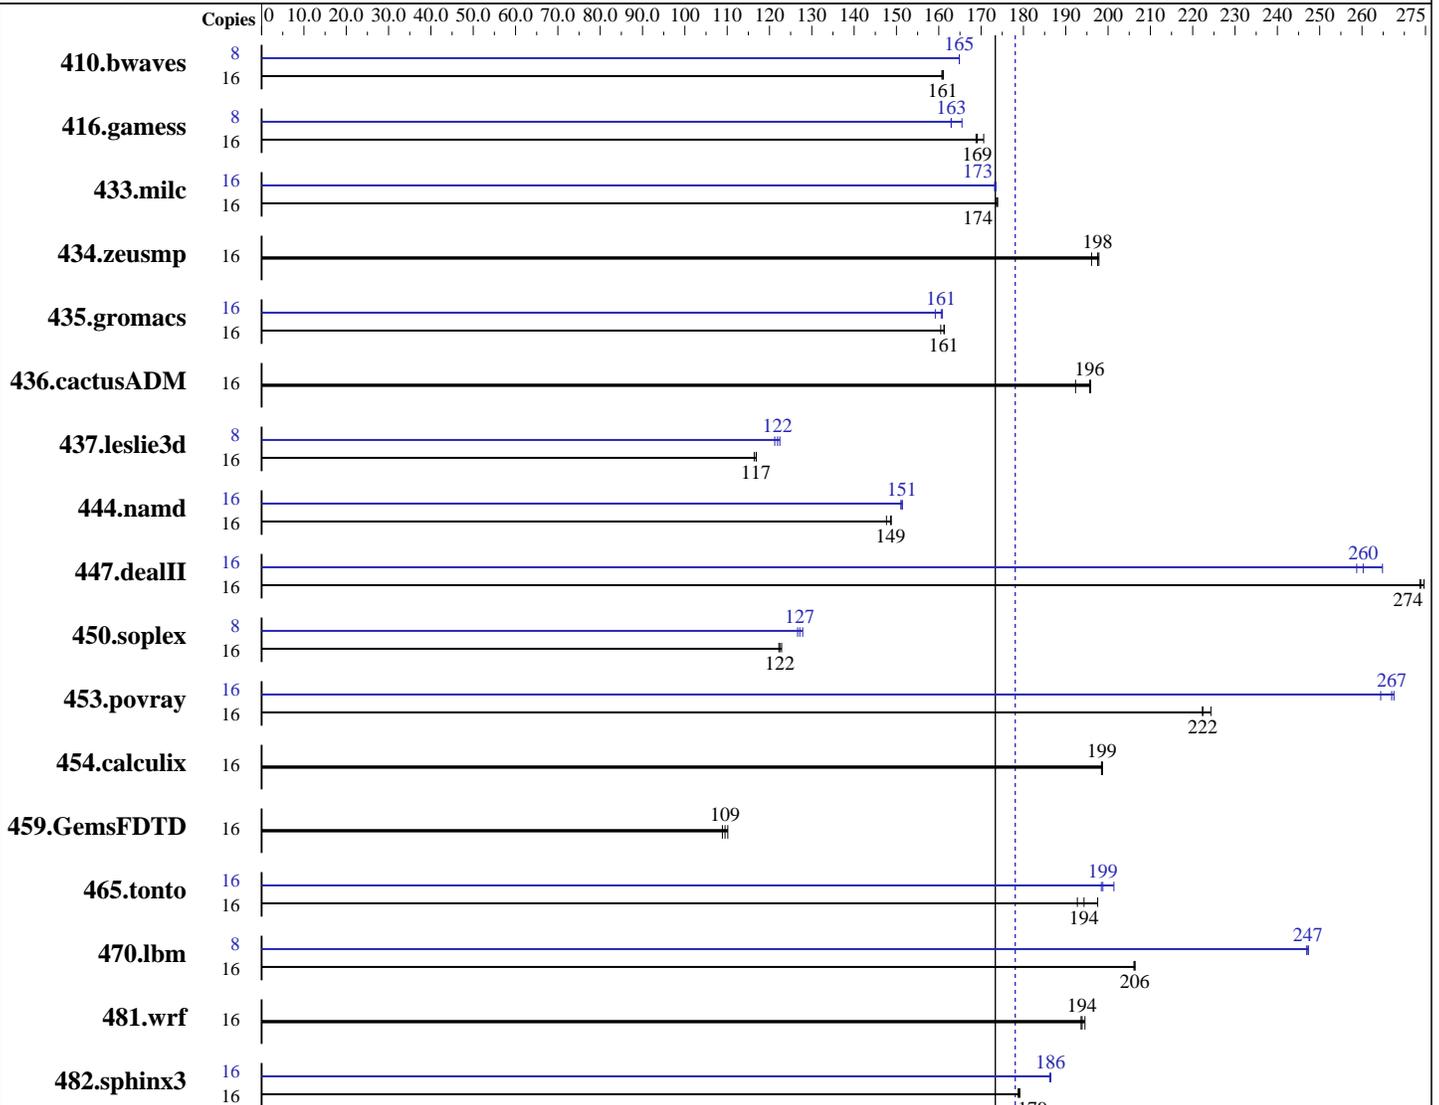

SPECfp\_rate\_base2006 = 173

SPECfp\_rate2006 = 178

### Hardware

CPU Name: Intel Xeon E5620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.2 Build 20110112  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 178

Servidor Itaotec MX224 (Intel Xeon E5620)

SPECfp\_rate\_base2006 = 173

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (6 x 4 GB 2Rx4 PC3-8500R-7, ECC)  
Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1350	161	<u>1351</u>	<u>161</u>	1353	161	8	<u>659</u>	<u>165</u>	659	165	660	165
416.gamess	16	1856	169	<u>1853</u>	<u>169</u>	1836	171	8	<u>961</u>	<u>163</u>	961	163	947	165
433.milc	16	<u>845</u>	<u>174</u>	845	174	846	174	16	847	173	848	173	<u>847</u>	<u>173</u>
434.zeusmp	16	<u>737</u>	<u>198</u>	736	198	742	196	16	<u>737</u>	<u>198</u>	736	198	742	196
435.gromacs	16	<u>709</u>	<u>161</u>	712	160	708	161	16	710	161	718	159	<u>711</u>	<u>161</u>
436.cactusADM	16	976	196	994	192	<u>977</u>	<u>196</u>	16	976	196	994	192	<u>977</u>	<u>196</u>
437.leslie3d	16	1292	116	<u>1287</u>	<u>117</u>	1287	117	8	620	121	<u>617</u>	<u>122</u>	614	122
444.namd	16	862	149	869	148	<u>863</u>	<u>149</u>	16	850	151	<u>848</u>	<u>151</u>	848	151
447.dealII	16	666	275	669	274	<u>668</u>	<u>274</u>	16	707	259	691	265	<u>703</u>	<u>260</u>
450.soplex	16	1086	123	<u>1090</u>	<u>122</u>	1092	122	8	<u>525</u>	<u>127</u>	527	127	522	128
453.povray	16	383	222	<u>383</u>	<u>222</u>	379	224	16	<u>319</u>	<u>267</u>	322	264	318	268
454.calculix	16	664	199	<u>665</u>	<u>199</u>	665	198	16	664	199	<u>665</u>	<u>199</u>	665	198
459.GemsFDTD	16	1541	110	<u>1550</u>	<u>109</u>	1559	109	16	1541	110	<u>1550</u>	<u>109</u>	1559	109
465.tonto	16	<u>810</u>	<u>194</u>	817	193	797	198	16	<u>792</u>	<u>199</u>	782	201	794	198
470.lbm	16	1067	206	<u>1066</u>	<u>206</u>	1065	206	8	445	247	<u>445</u>	<u>247</u>	444	247
481.wrf	16	919	195	923	194	<u>922</u>	<u>194</u>	16	919	195	923	194	<u>922</u>	<u>194</u>
482.sphinx3	16	1741	179	1745	179	<u>1742</u>	<u>179</u>	16	<u>1673</u>	<u>186</u>	1672	186	1675	186

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Data Reuse disabled in BIOS.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 178

Servidor Itaotec MX224 (Intel Xeon E5620)

SPECfp\_rate\_base2006 = 173

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## General Notes

This result was measured on the Servidor Itaotec MX224.  
The Servidor Itaotec MX203+, Servidor Itaotec MX223+ and the Servidor Itaotec MX224 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 178

Servidor Itaotec MX224 (Intel Xeon E5620)

SPECfp\_rate\_base2006 = 173

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 178

Servidor Itaotec MX224 (Intel Xeon E5620)

SPECfp\_rate\_base2006 = 173

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 178

Servidor Itautec MX224 (Intel Xeon E5620)

SPECfp\_rate\_base2006 = 173

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 00:18:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 August 2011.