



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®_rate2006 = 118

Servidor Itautec MX203+ (Intel Xeon E5620)

SPECint_rate_base2006 = 112

CPU2006 license: 9001


Test date: Jul-2011

Test sponsor: Itautec

Hardware Availability: Apr-2010

Tested by: Itautec

Software Availability: Jan-2011

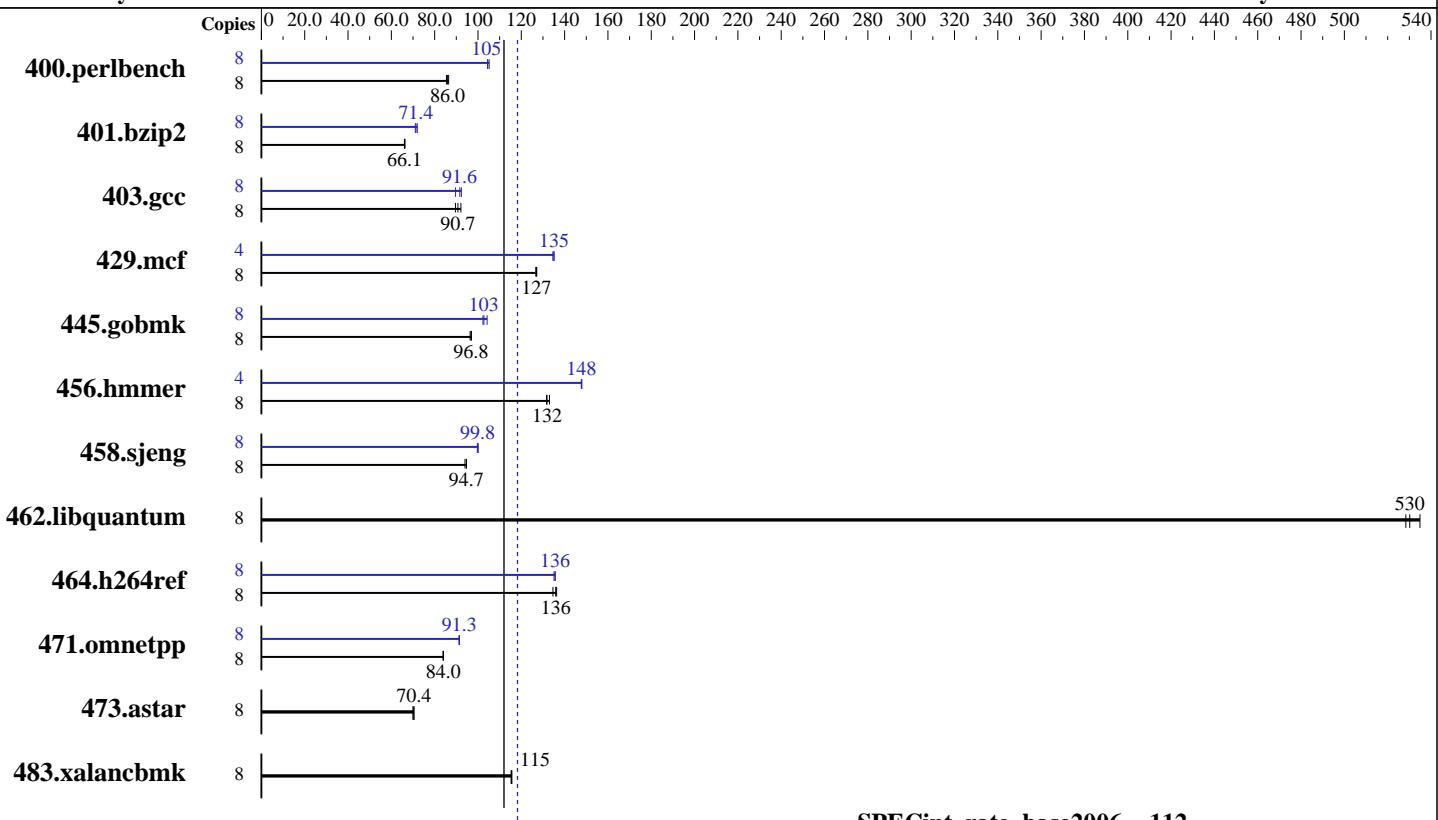

SPECint_rate_base2006 = 112

SPECint_rate2006 = 118

Hardware

CPU Name: Intel Xeon E5620
CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB 2Rx4 PC3-8500R-7, ECC)
Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.2 Build 20110112
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

SPECint_rate2006 = 118

Servidor Itautech MX203+ (Intel Xeon E5620)

SPECint_rate_base2006 = 112

CPU2006 license: 9001

Test date: Jul-2011

Test sponsor: Itautech

Hardware Availability: Apr-2010

Tested by: Itautech

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	904	86.5	915	85.4	909	86.0	8	743	105	748	105	748	104
401.bzip2	8	1165	66.3	1169	66.0	1167	66.1	8	1072	72.0	1086	71.1	1081	71.4
403.gcc	8	710	90.7	719	89.6	699	92.1	8	718	89.7	697	92.3	703	91.6
429.mcf	8	574	127	574	127	576	127	4	271	135	270	135	270	135
445.gobmk	8	866	97.0	871	96.4	867	96.8	8	805	104	820	102	817	103
456.hammer	8	561	133	567	132	566	132	4	252	148	252	148	253	148
458.sjeng	8	1023	94.7	1030	94.0	1023	94.7	8	967	100	970	99.8	971	99.7
462.libquantum	8	310	535	314	528	313	530	8	310	535	314	528	313	530
464.h264ref	8	1303	136	1315	135	1299	136	8	1306	136	1310	135	1305	136
471.omnetpp	8	595	84.1	595	84.0	596	83.9	8	547	91.5	547	91.3	548	91.3
473.astar	8	797	70.4	803	70.0	798	70.4	8	797	70.4	803	70.0	798	70.4
483.xalancbmk	8	477	116	479	115	478	115	8	477	116	479	115	478	115

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Data Reuse disabled in BIOS.

General Notes

This result was measured on the Servidor Itautech MX224.
The Servidor Itautech MX203+, Servidor Itautech MX223+ and the Servidor Itautech MX224
are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX203+ (Intel Xeon E5620)

SPECint_rate2006 = 118

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Jul-2011

Hardware Availability: Apr-2010

Software Availability: Jan-2011

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/rkaneca/sh/SmartHeap_8.1/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX203+ (Intel Xeon E5620)

SPECint_rate2006 = 118

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Jul-2011

Hardware Availability: Apr-2010

Software Availability: Jan-2011

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -opt-prefetch -auto-ilp32 -ansi-alias
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
  -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
  -ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -unroll14 -auto-ilp32
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

Servidor Itautech MX203+ (Intel Xeon E5620)

SPECint_rate2006 = 118

CPU2006 license: 9001

Test sponsor: Itautech

Tested by: Itautech

Test date: Jul-2011

Hardware Availability: Apr-2010

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

471.omnetpp (continued):

-L/home/rccaneca/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/Itautech-Intel-Linux64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/Itautech-Intel-Linux64-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 23:42:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 August 2011.