SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3 (AMD Opteron 6136)

SPECfp®_rate2006 = 517

SPECfp_rate_base2006 = 466

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2011
Hardware Availability: Dec-2010
Software Availability: Jul-2010

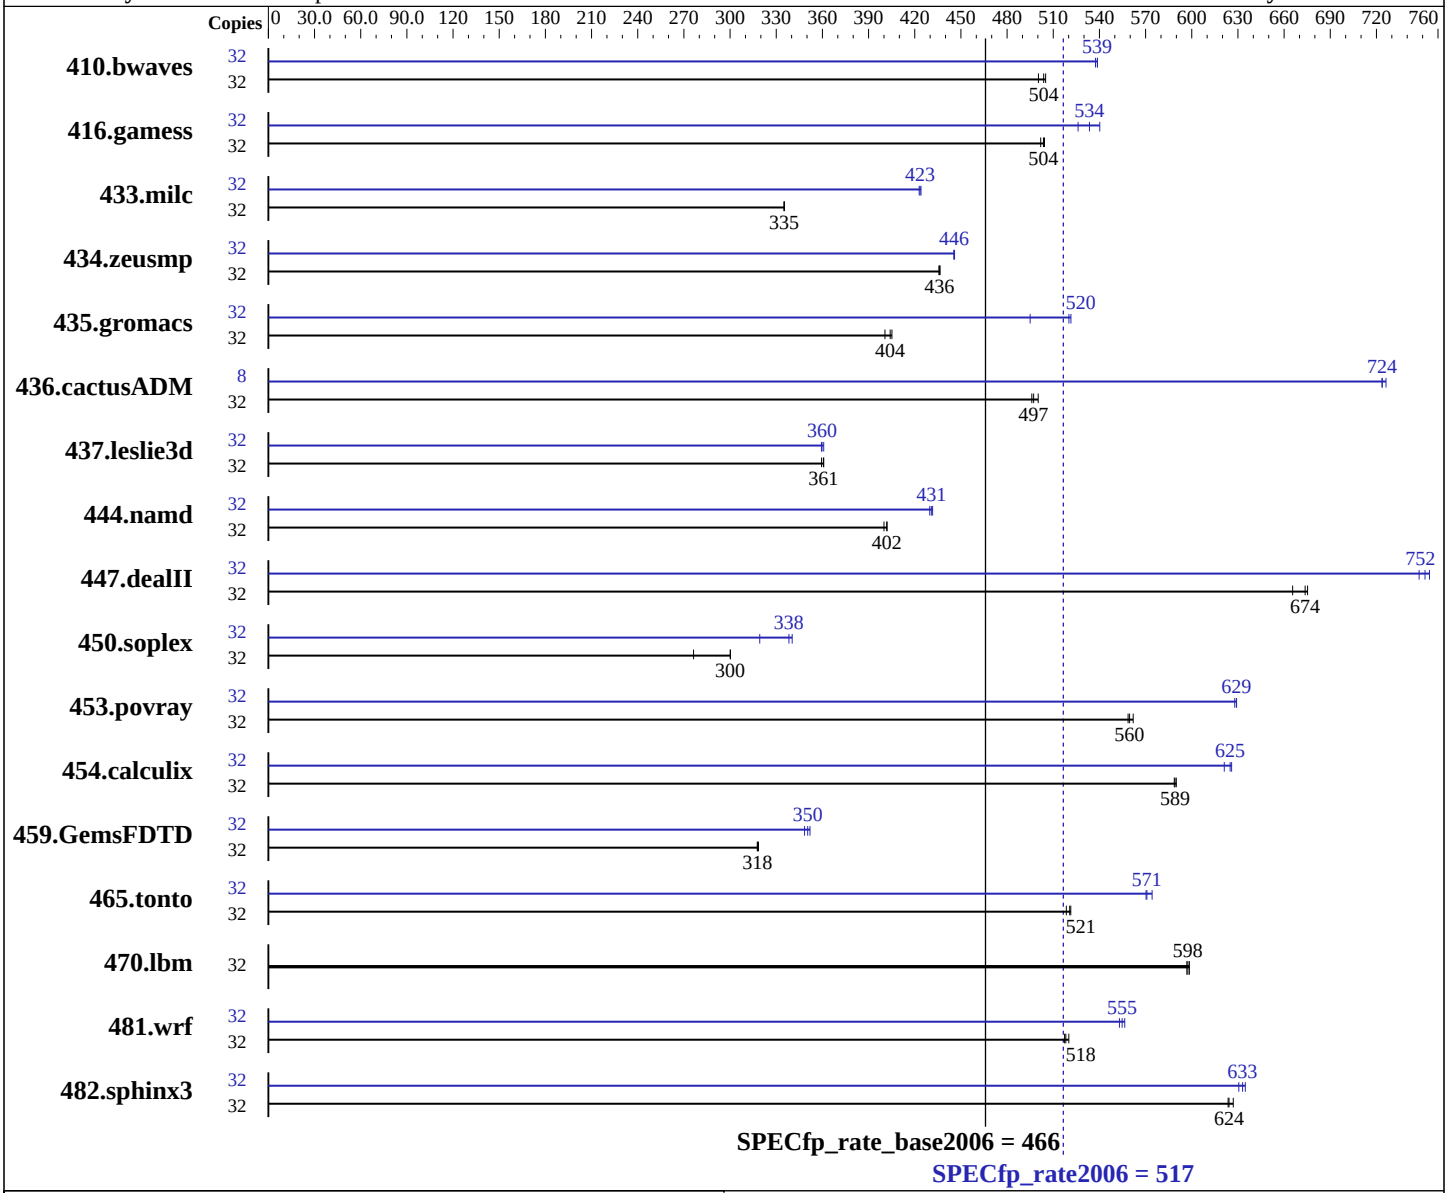

Hardware

CPU Name:	AMD Opteron 6136
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3 (AMD Opteron 6136)

SPECfp_rate2006 = 517

SPECfp_rate_base2006 = 466

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2011
Hardware Availability: Dec-2010
Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores
Other Cache: None
Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	869	500	**863**	**504**	861	505	32	**807**	**539**	809	537	807	539
416.gamess	32	1249	502	1242	504	**1244**	**504**	32	**1174**	**534**	1191	526	1160	540
433.milc	32	**876**	**335**	877	335	876	335	32	**694**	**423**	695	423	693	424
434.zeusmp	32	668	436	**668**	**436**	667	436	32	653	446	**654**	**446**	654	445
435.gromacs	32	570	401	564	405	**565**	**404**	32	462	495	**439**	**520**	438	521
436.cactusADM	32	**769**	**497**	764	500	771	496	8	132	724	132	726	**132**	**724**
437.leslie3d	32	837	359	834	361	**834**	**361**	32	834	361	837	359	**836**	**360**
444.namd	32	642	400	638	402	**639**	**402**	32	597	430	**596**	**431**	595	432
447.dealII	32	542	675	550	666	**543**	**674**	32	**487**	**752**	490	748	485	754
450.soplex	32	966	276	**889**	**300**	889	300	32	836	319	**789**	**338**	784	340
453.povray	32	**304**	**560**	303	562	305	559	32	271	628	**271**	**629**	271	629
454.calculix	32	447	590	448	589	**448**	**589**	32	422	626	425	621	**422**	**625**
459.GemsFDTD	32	**1068**	**318**	1066	318	1069	318	32	975	348	965	352	**969**	**350**
465.tonto	32	604	521	**605**	**521**	607	518	32	552	570	548	574	**552**	**571**
470.lbm	32	735	598	**736**	**598**	737	597	32	735	598	**736**	**598**	737	597
481.wrf	32	691	517	687	520	**690**	**518**	32	**644**	**555**	642	556	646	553
482.sphinx3	32	995	627	1000	624	**999**	**624**	32	983	635	989	631	**985**	**633**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS Settings:
 Operating Mode set to Performance Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/root/speccpu_2011-03-22/speccpu_rate_revC-3/amd1002mc-rate-libs-revC/64:/root/speccpu_2011-03-22/speccpu_rate_revC-3/amd1002mc-rate-libs-revC/32"
OMP_NUM_THREADS = "4"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were complied on SLES10 SP2 with binutils 2.18
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Fortran benchmarks:
`openf95`

Benchmarks using both Fortran and C:
`opencc openf95`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -static -INLINE:aggressive=on -OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:
-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.html
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.xml
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3 (AMD Opteron 6136)

SPECfp_rate2006 = 517

SPECfp_rate_base2006 = 466

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2011
Hardware Availability: Dec-2010
Software Availability: Jul-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:21:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 August 2011.