



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 123

CPU2006 license: 13


Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

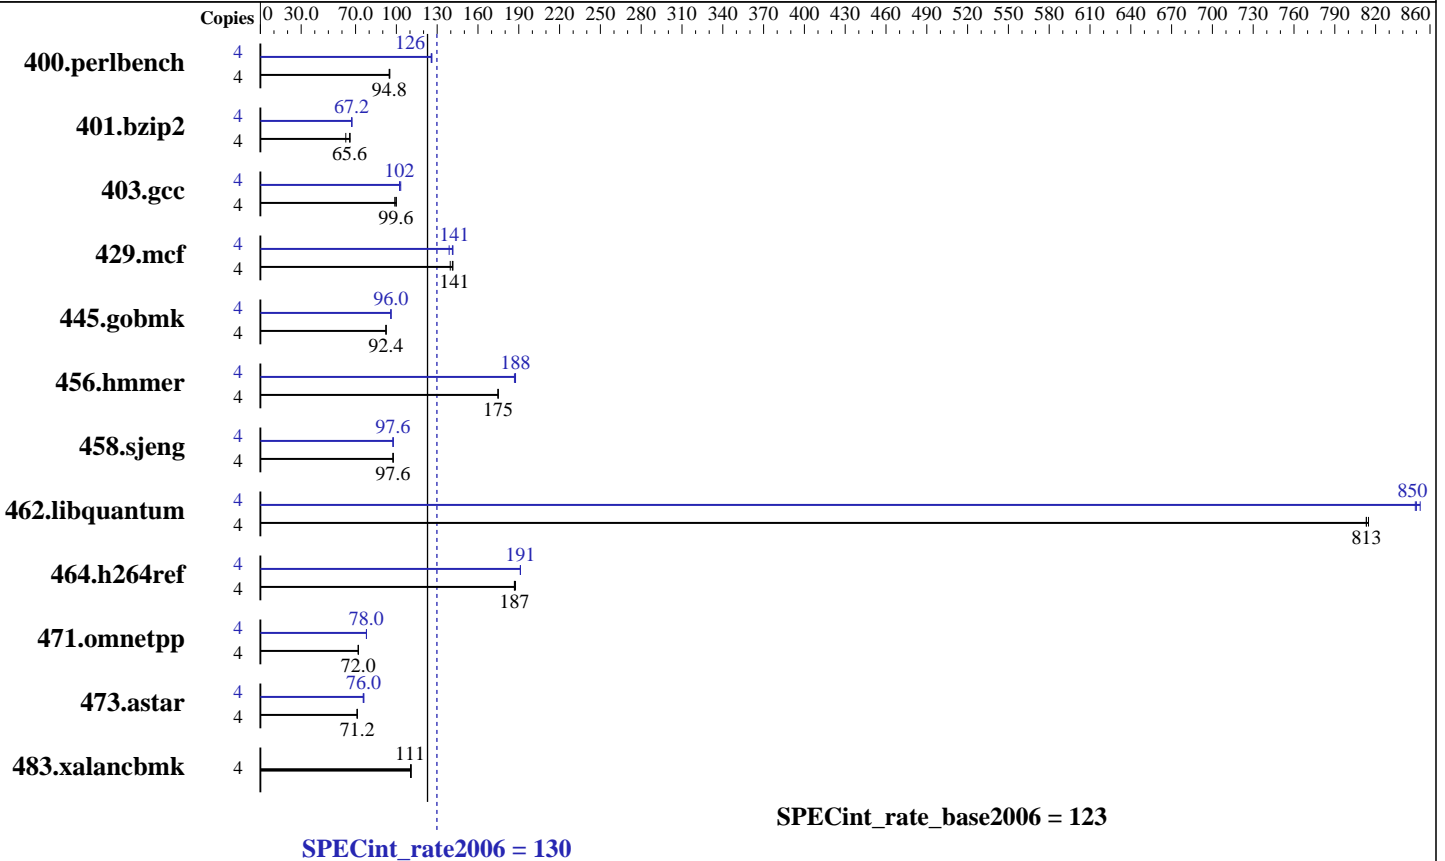

Hardware

CPU Name: Intel Core i5-2400
 CPU Characteristics: Intel Turbo Boost Technology up to 3.4 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 2Rx8 PC3-10600U-9)
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 123

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	413	94.8	<u>411</u>	<u>94.8</u>	411	95.2	4	<u>310</u>	<u>126</u>	310	126	311	126
401.bzip2	4	615	62.8	<u>588</u>	<u>65.6</u>	587	66.0	4	573	67.2	<u>575</u>	<u>67.2</u>	575	67.2
403.gcc	4	322	100	<u>324</u>	<u>99.6</u>	326	98.8	4	315	102	312	103	<u>314</u>	<u>102</u>
429.mcf	4	<u>258</u>	<u>141</u>	261	140	258	142	4	263	139	258	142	<u>258</u>	<u>141</u>
445.gobmk	4	454	92.4	<u>453</u>	<u>92.4</u>	453	92.4	4	438	96.0	<u>437</u>	<u>96.0</u>	437	96.0
456.hammer	4	214	175	<u>214</u>	<u>175</u>	214	175	4	200	187	199	188	<u>199</u>	<u>188</u>
458.sjeng	4	496	97.6	<u>496</u>	<u>97.6</u>	496	97.6	4	496	97.6	<u>497</u>	<u>97.6</u>	497	97.6
462.libquantum	4	<u>102</u>	<u>813</u>	102	815	102	813	4	<u>97.5</u>	<u>850</u>	97.6	849	97.2	853
464.h264ref	4	<u>473</u>	<u>187</u>	473	187	472	188	4	463	191	463	191	<u>463</u>	<u>191</u>
471.omnetpp	4	347	72.0	347	72.0	<u>347</u>	<u>72.0</u>	4	<u>321</u>	<u>78.0</u>	321	78.0	321	78.0
473.astar	4	395	71.2	394	71.2	<u>394</u>	<u>71.2</u>	4	370	76.0	371	75.6	<u>370</u>	<u>76.0</u>
483.xalancbmk	4	250	110	249	111	<u>249</u>	<u>111</u>	4	250	110	249	111	<u>249</u>	<u>111</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

General Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 123

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc9 -Qstd=c99

456.hmmr: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc9

473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32

456.hmmr: -DSPEC_CPU_P64

458.sjeng: -DSPEC_CPU_P64

462.libquantum: -DSPEC_CPU_P64

464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES

473.astar: -DSPEC_CPU_P64

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 123

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000
shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlW64M.lib
-link /FORCE:MULTIPLE

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2400)

SPECint_rate_base2006 = 123

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

456.hmmer: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 23:52:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.