



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 480

ProLiant BL465c G7,
AMD Opteron 6276

SPECint_rate_base2006 = 419

CPU2006 license: 3


Test date: Sep-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

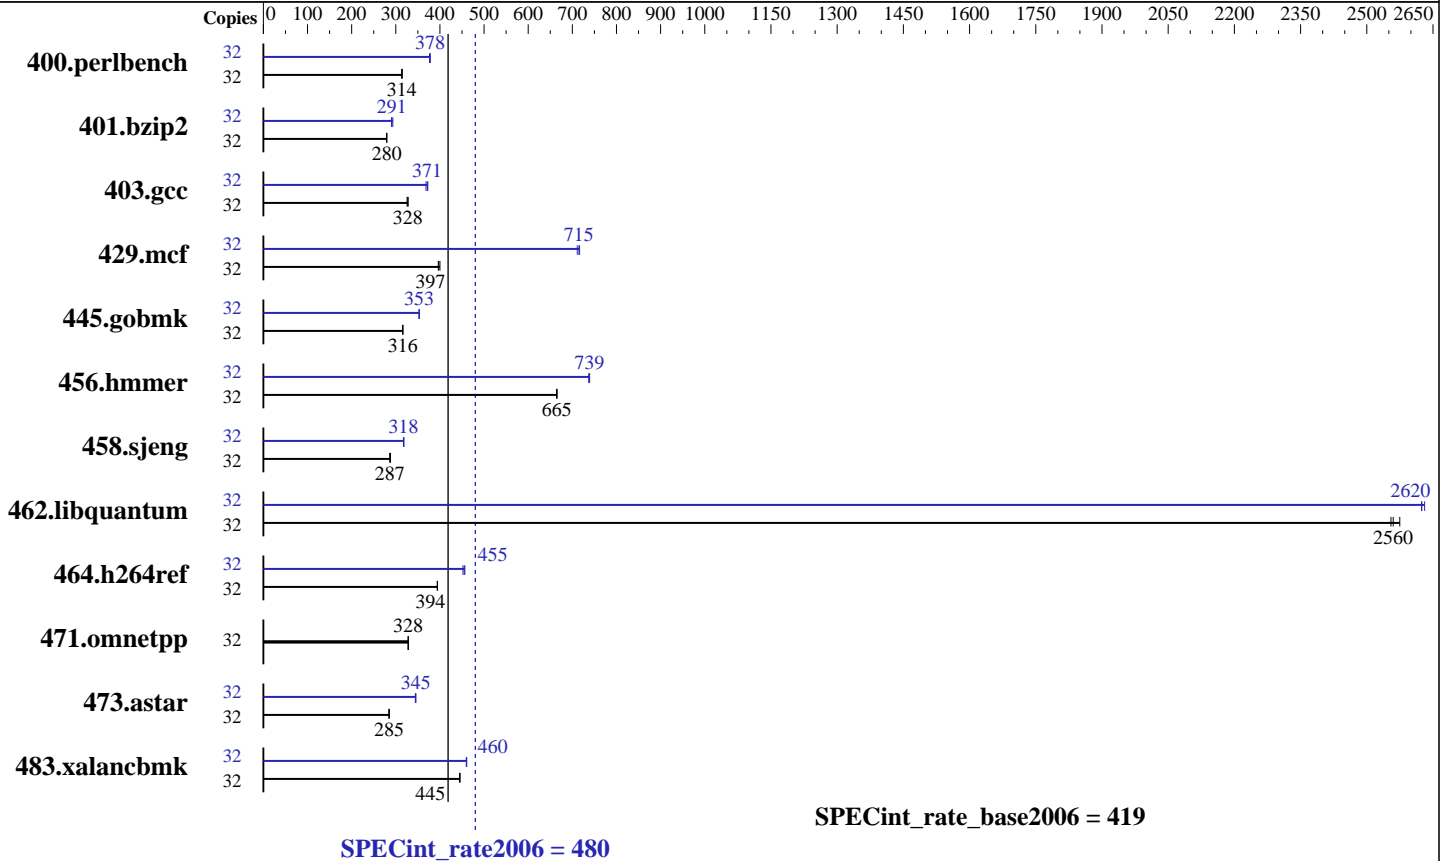

Hardware

CPU Name: AMD Opteron 6276
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 15 K SATA
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 4.2.5.2 of
x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G7,
AMD Opteron 6276

SPECint_rate2006 = 480

SPECint_rate_base2006 = 419

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	32	994	314	997	314	996	314	32	830	376	827	378	828	378		
401.bzip2	32	1106	279	1105	280	1105	280	32	1053	293	1061	291	1064	290		
403.gcc	32	786	328	786	328	791	326	32	699	368	694	371	691	373		
429.mcf	32	730	400	736	396	735	397	32	407	716	410	711	408	715		
445.gobmk	32	1063	316	1063	316	1062	316	32	951	353	951	353	951	353		
456.hammer	32	449	665	449	664	449	665	32	404	739	405	737	404	739		
458.sjeng	32	1350	287	1345	288	1351	287	32	1215	319	1220	317	1219	318		
462.libquantum	32	260	2550	259	2560	258	2570	32	253	2620	252	2630	253	2620		
464.h264ref	32	1797	394	1795	395	1796	394	32	1566	452	1556	455	1551	456		
471.omnetpp	32	609	328	610	328	609	328	32	609	328	610	328	609	328		
473.astar	32	789	285	789	285	789	285	32	653	344	651	345	651	345		
483.xalancbmk	32	496	445	496	445	497	444	32	480	460	479	461	480	460		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set "echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled"
Set "kernel/randomize_va_space=0" in /etc/sysctl.conf

Set vm/nr_hugepages=28672 in /etc/sysctl.conf
Set "nodev /mnt/hugepages hugetlbfs defaults 0 0" in /etc/fstab

Platform Notes

BIOS settings:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1104-rate-libs-revA/32:/cpu2006/amd1104-rate-libs-revA/64"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 480

ProLiant BL465c G7,
AMD Opteron 6276

SPECint_rate_base2006 = 419

CPU2006 license: 3

Test date: Sep-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 480

ProLiant BL465c G7,
AMD Opteron 6276

SPECint_rate_base2006 = 419

CPU2006 license: 3

Test date: Sep-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
               -IPA:plimit=20000 -OPT:unroll_times_max=8
               -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
               -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
               -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
            -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
            -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
          -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
          -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
          -INLINE:aggressive=on -CG:gcm=off
          -GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
            -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1
            -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
            -OPT:alias=disjoint -OPT:unroll_times_max=16
            -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
            -HP:bd=2m:heap=2m

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 480

ProLiant BL465c G7,
AMD Opteron 6276

SPECint_rate_base2006 = 419

CPU2006 license: 3

Test date: Sep-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:bd=2m:heap=2m
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
-OPT:unroll_times_max=16 -LNO:prefetch=2
-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small_pu=100
-HP:bd=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-GRA:optimize_boundary=on -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
-m32 -HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G7,
AMD Opteron 6276

SPECint_rate2006 = 480

SPECint_rate_base2006 = 419

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:54:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 November 2011.