



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint®2006 = 34.4

HA8000-bd (Intel Core i3-2120T)

SPECint_base2006 = 32.9

CPU2006 license: 35


Test date: Dec-2011

Test sponsor: HITACHI

Hardware Availability: Feb-2012

Tested by: HITACHI

Software Availability: Sep-2011

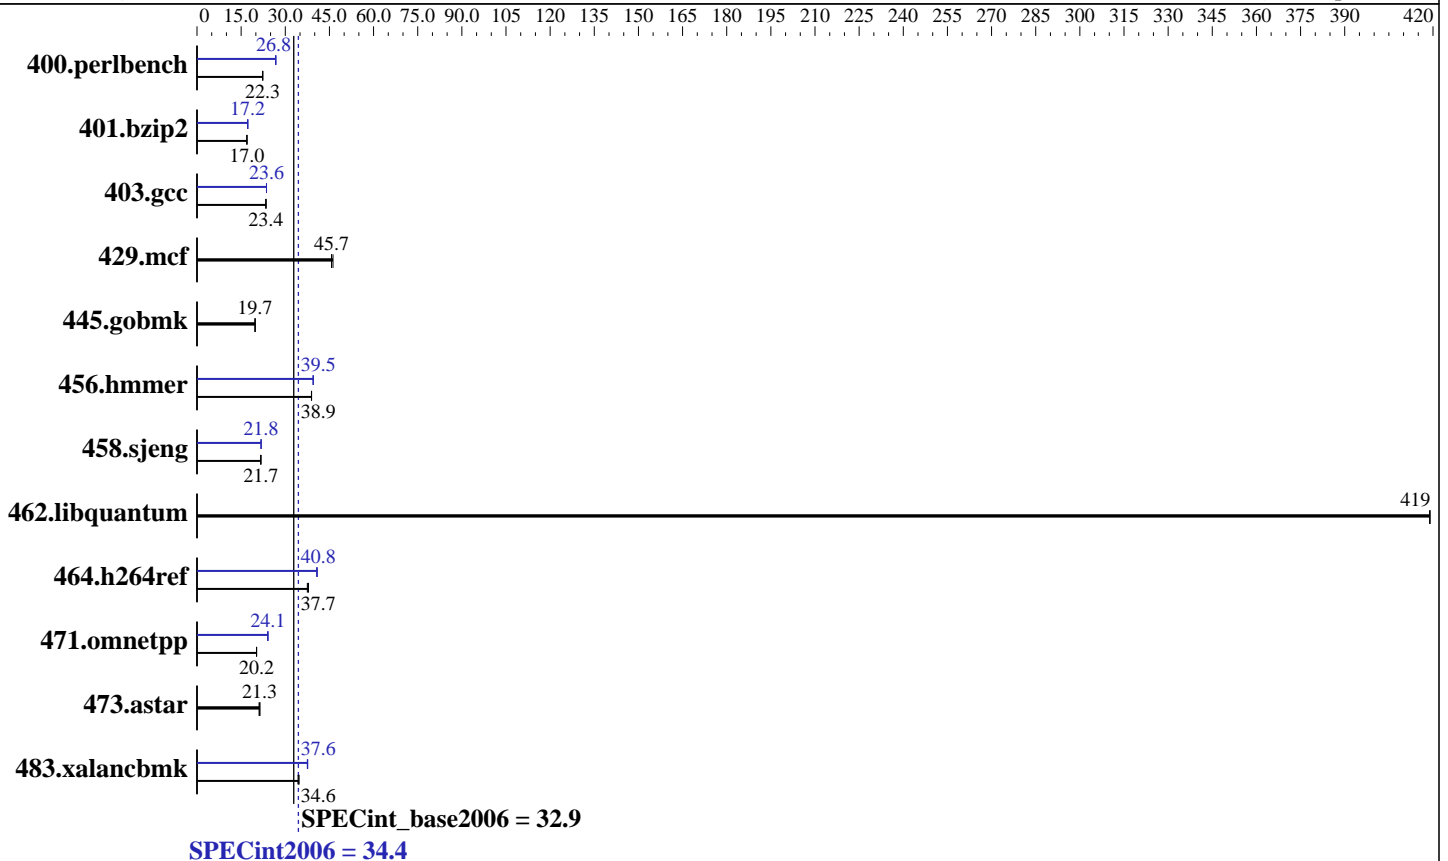

Hardware

CPU Name: Intel Core i3-2120T
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB
 (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
 Disk Subsystem: 1 x 250 GB SATA2, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 34.4

HA8000-bd (Intel Core i3-2120T)

SPECint_base2006 = 32.9

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Dec-2011
Hardware Availability: Feb-2012
Software Availability: Sep-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	438	22.3	437	22.3	438	22.3	365	26.8	365	26.7	365	26.8
401.bzip2	569	17.0	568	17.0	569	17.0	560	17.2	560	17.2	559	17.3
403.gcc	343	23.5	344	23.4	344	23.4	341	23.6	341	23.6	341	23.6
429.mcf	197	46.2	200	45.7	199	45.7	197	46.2	200	45.7	199	45.7
445.gobmk	531	19.7	531	19.8	531	19.7	531	19.7	531	19.8	531	19.7
456.hammer	240	38.9	240	38.9	240	38.9	236	39.5	236	39.5	236	39.5
458.sjeng	558	21.7	558	21.7	558	21.7	556	21.8	555	21.8	556	21.8
462.libquantum	49.5	419	49.5	419	49.5	419	49.5	419	49.5	419	49.5	419
464.h264ref	584	37.9	590	37.5	587	37.7	542	40.9	543	40.8	544	40.7
471.omnetpp	309	20.2	309	20.3	309	20.2	259	24.1	259	24.1	260	24.0
473.astar	329	21.3	333	21.1	329	21.4	329	21.3	333	21.1	329	21.4
483.xalancbmk	201	34.3	199	34.6	199	34.6	184	37.6	184	37.6	184	37.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
OMP_NUM_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 34.4

HA8000-bd (Intel Core i3-2120T)

SPECint_base2006 = 32.9

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/smartheap -lsmartheap64`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`464.h264ref: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

`473.astar: icpc -m64`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 34.4

HA8000-bd (Intel Core i3-2120T)

SPECint_base2006 = 32.9

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
            -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
              -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias
              -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 34.4

HA8000-bd (Intel Core i3-2120T)

SPECint_base2006 = 32.9

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:26:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 February 2012.