



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

### SPECfp<sup>®</sup>\_rate2006 = 332

Cisco UCS C260 M2 (Intel Xeon E7-8867L, 2.13 GHz)

### SPECfp\_rate\_base2006 = 323

CPU2006 license: 9019


Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Oct-2011

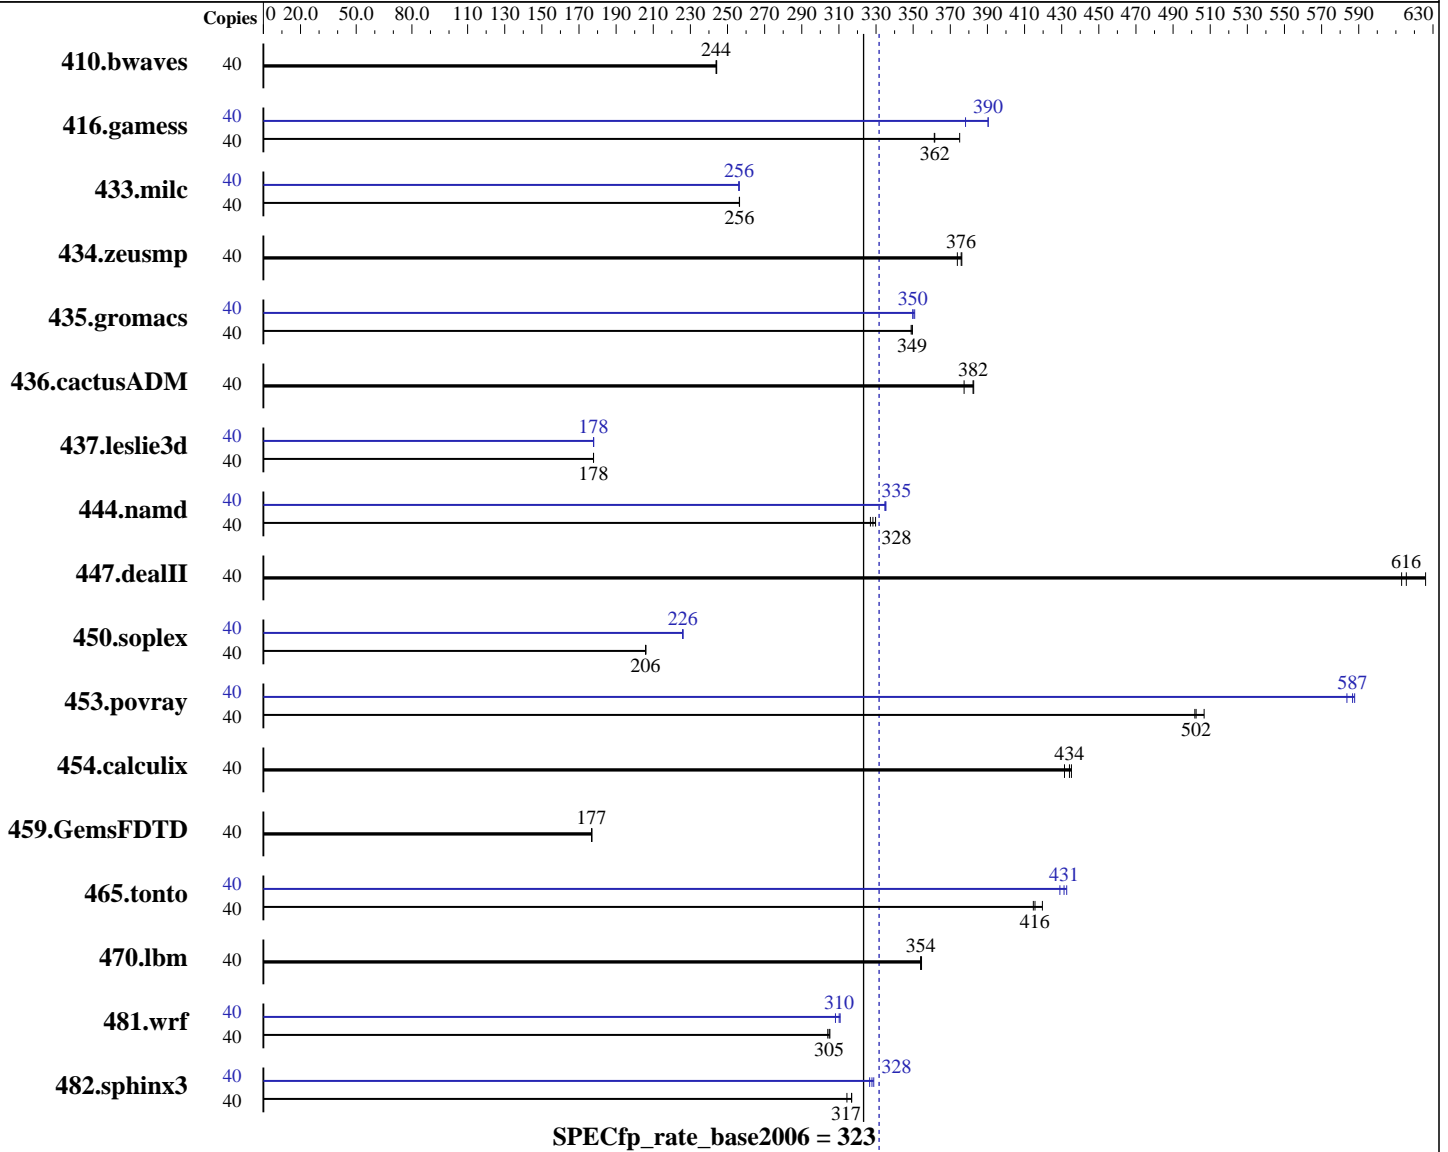

### Hardware

CPU Name: Intel Xeon E7-8867L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = 332

Cisco UCS C260 M2 (Intel Xeon E7-8867L, 2.13 GHz)

SPECfp\_rate\_base2006 = 323

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Oct-2011

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 4Rx4 PC3-8500R-9, ECC)  
 Disk Subsystem: 600 GB SAS 10K RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	40	2226	244	2229	244	<u>2229</u>	<u>244</u>	40	2226	244	2229	244	<u>2229</u>	<u>244</u>		
416.gamess	40	2088	375	<u>2166</u>	<u>362</u>	2167	361	40	<u>2006</u>	<u>390</u>	2006	390	2071	378		
433.milc	40	1432	256	1432	256	<u>1432</u>	<u>256</u>	40	1434	256	<u>1433</u>	<u>256</u>	1433	256		
434.zeusmp	40	968	376	974	374	<u>968</u>	<u>376</u>	40	968	376	974	374	<u>968</u>	<u>376</u>		
435.gromacs	40	817	350	<u>817</u>	<u>349</u>	819	349	40	814	351	816	350	<u>816</u>	<u>350</u>		
436.cactusADM	40	1266	377	1249	383	<u>1251</u>	<u>382</u>	40	1266	377	1249	383	<u>1251</u>	<u>382</u>		
437.leslie3d	40	<u>2115</u>	<u>178</u>	2114	178	2115	178	40	2113	178	2115	178	<u>2114</u>	<u>178</u>		
444.namd	40	<u>977</u>	<u>328</u>	981	327	973	330	40	<u>958</u>	<u>335</u>	958	335	957	335		
447.dealII	40	731	626	<u>743</u>	<u>616</u>	746	613	40	731	626	<u>743</u>	<u>616</u>	746	613		
450.soplex	40	<u>1620</u>	<u>206</u>	1621	206	1619	206	40	<u>1477</u>	<u>226</u>	1477	226	1476	226		
453.povray	40	424	502	<u>424</u>	<u>502</u>	420	507	40	<u>363</u>	<u>587</u>	365	584	362	588		
454.calculix	40	758	435	<u>760</u>	<u>434</u>	765	432	40	758	435	<u>760</u>	<u>434</u>	765	432		
459.GemsFDTD	40	2400	177	<u>2400</u>	<u>177</u>	2399	177	40	2400	177	<u>2400</u>	<u>177</u>	2399	177		
465.tonto	40	938	420	<u>947</u>	<u>416</u>	949	415	40	<u>913</u>	<u>431</u>	910	433	917	429		
470.lbm	40	<u>1552</u>	<u>354</u>	1550	355	1552	354	40	<u>1552</u>	<u>354</u>	1550	355	1552	354		
481.wrf	40	<u>1466</u>	<u>305</u>	1470	304	1464	305	40	1450	308	<u>1441</u>	<u>310</u>	1438	311		
482.sphinx3	40	<u>2461</u>	<u>317</u>	2480	314	2460	317	40	2371	329	<u>2378</u>	<u>328</u>	2387	327		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /opt/cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Thu Jan 26 23:22:48 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 332

Cisco UCS C260 M2 (Intel Xeon E7-8867L, 2.13 GHz)

SPECfp\_rate\_base2006 = 323

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jan-2012

Hardware Availability: May-2011

Software Availability: Oct-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-L8867 @ 2.13GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 8 9 16 17 18 24 25
  physical 1: cores 0 1 2 8 9 16 17 18 24 25
cache size : 30720 KB

```

```

From /proc/meminfo
MemTotal:      529190244 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.1 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 26 23:03

```

SPEC is set to: /opt/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      550G  5.6G  516G   2% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/opt/cpu2006/libs/32:/opt/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 332

Cisco UCS C260 M2 (Intel Xeon E7-8867L, 2.13 GHz)

SPECfp\_rate\_base2006 = 323

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Oct-2011

## General Notes (Continued)

```

memory using RHEL5.5
Transparent Huge Pages disabled with:
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 332

Cisco UCS C260 M2 (Intel Xeon E7-8867L, 2.13 GHz)

SPECfp\_rate\_base2006 = 323

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Oct-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 332

Cisco UCS C260 M2 (Intel Xeon E7-8867L, 2.13 GHz)

SPECfp\_rate\_base2006 = 323

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Oct-2011

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 332

Cisco UCS C260 M2 (Intel Xeon E7-8867L, 2.13 GHz)

SPECfp\_rate\_base2006 = 323

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: May-2011

Tested by: Cisco Systems

Software Availability: Oct-2011

## Peak Optimization Flags (Continued)

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:41:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 February 2012.