



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp<sup>®</sup>\_rate2006 = 255

Cisco UCS B200 M2 (Intel Xeon X5650, 2.67 GHz)

SPECfp\_rate\_base2006 = 249

CPU2006 license: 9019


Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

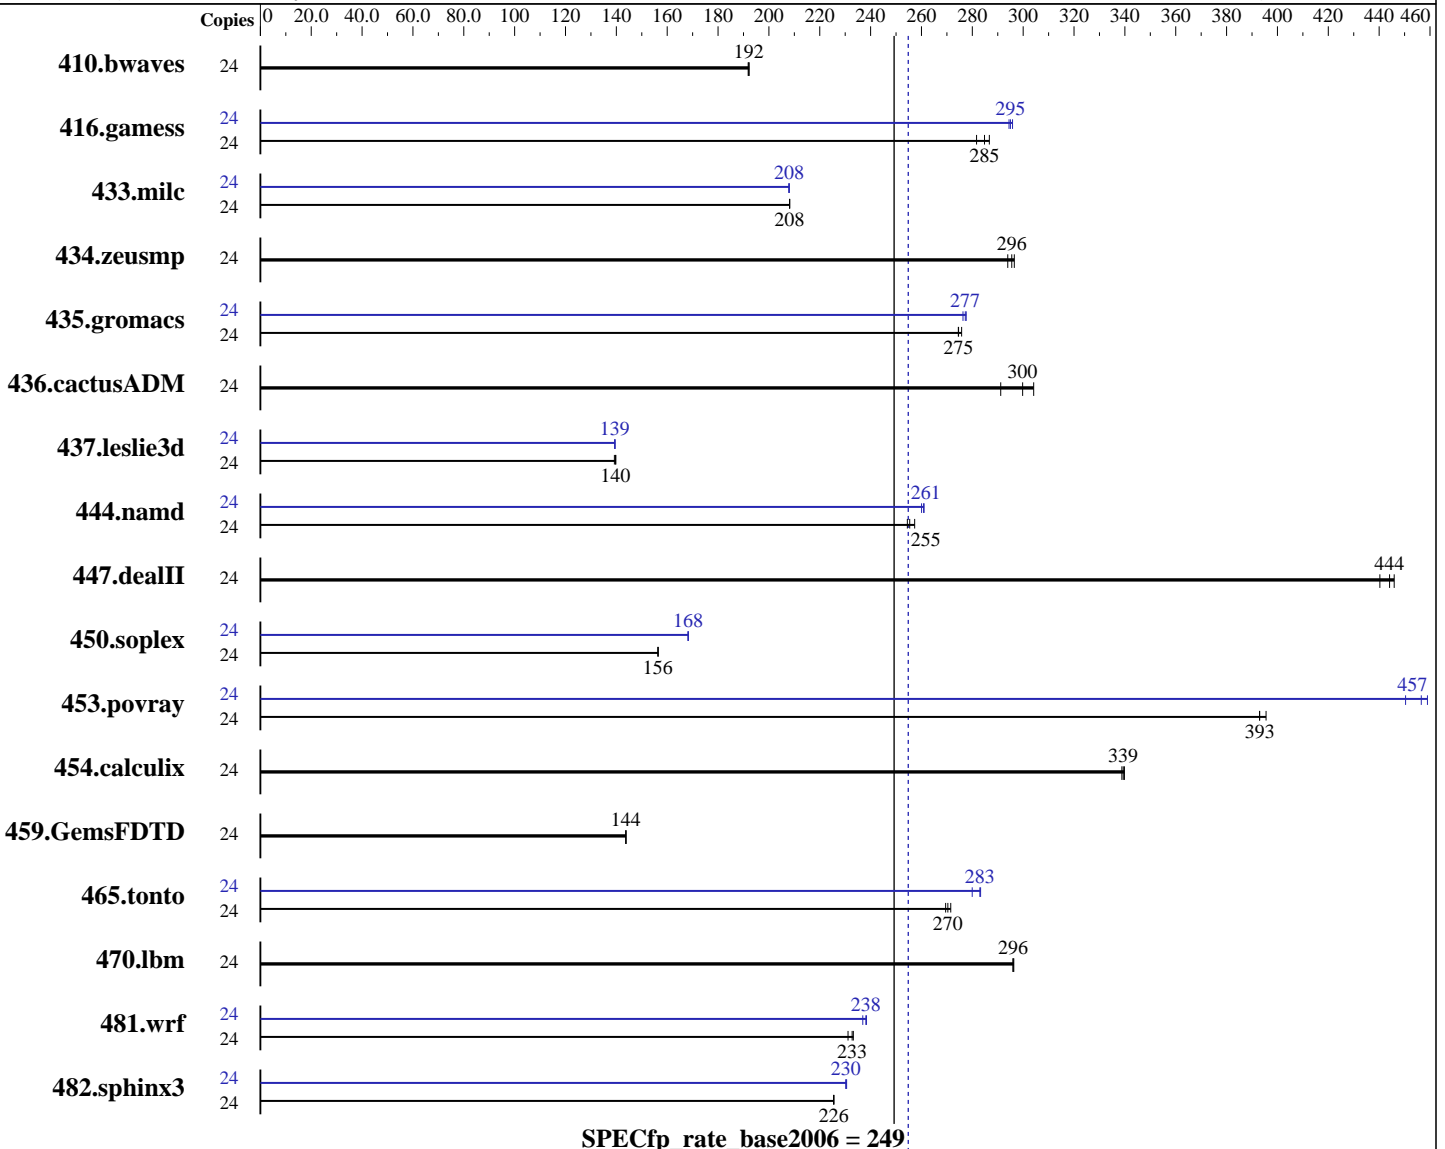

### Hardware

CPU Name: Intel Xeon X5650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = **255**

Cisco UCS B200 M2 (Intel Xeon X5650, 2.67 GHz)

SPECfp\_rate\_base2006 = **249**

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-10600R-9, ECC)  
 Disk Subsystem: 600 GB SAS 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1697	192	<b>1698</b>	<b>192</b>	1700	192	24	1697	192	<b>1698</b>	<b>192</b>	1700	192
416.gamess	24	1668	282	<b>1650</b>	<b>285</b>	1639	287	24	<b>1593</b>	<b>295</b>	1589	296	1596	294
433.milc	24	<b>1059</b>	<b>208</b>	1058	208	1059	208	24	1059	208	<b>1059</b>	<b>208</b>	1060	208
434.zeusmp	24	<b>739</b>	<b>296</b>	737	297	743	294	24	<b>739</b>	<b>296</b>	737	297	743	294
435.gromacs	24	621	276	624	274	<b>624</b>	<b>275</b>	24	617	278	<b>618</b>	<b>277</b>	620	276
436.cactusADM	24	943	304	<b>957</b>	<b>300</b>	985	291	24	943	304	<b>957</b>	<b>300</b>	985	291
437.leslie3d	24	1614	140	<b>1615</b>	<b>140</b>	1620	139	24	1619	139	1617	140	<b>1619</b>	<b>139</b>
444.namd	24	748	257	<b>754</b>	<b>255</b>	756	254	24	<b>738</b>	<b>261</b>	737	261	740	260
447.dealII	24	624	440	616	446	<b>618</b>	<b>444</b>	24	624	440	616	446	<b>618</b>	<b>444</b>
450.soplex	24	1279	156	<b>1280</b>	<b>156</b>	1280	156	24	1189	168	1190	168	<b>1190</b>	<b>168</b>
453.povray	24	<b>325</b>	<b>393</b>	323	396	325	393	24	278	459	283	450	<b>280</b>	<b>457</b>
454.calculix	24	<b>583</b>	<b>339</b>	584	339	583	340	24	<b>583</b>	<b>339</b>	584	339	583	340
459.GemsFDTD	24	1771	144	<b>1772</b>	<b>144</b>	1772	144	24	1771	144	<b>1772</b>	<b>144</b>	1772	144
465.tonto	24	876	270	870	272	<b>873</b>	<b>270</b>	24	844	280	<b>835</b>	<b>283</b>	834	283
470.lbm	24	1113	296	<b>1114</b>	<b>296</b>	1114	296	24	1113	296	<b>1114</b>	<b>296</b>	1114	296
481.wrf	24	1160	231	1150	233	<b>1152</b>	<b>233</b>	24	1125	238	1132	237	<b>1126</b>	<b>238</b>
482.sphinx3	24	2074	226	<b>2074</b>	<b>226</b>	2075	225	24	2029	231	2031	230	<b>2031</b>	<b>230</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration : Data Reuse Optimization = Disabled  
 Sysinfo program /opt/cpu2006/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 255

Cisco UCS B200 M2 (Intel Xeon X5650, 2.67 GHz)

SPECfp\_rate\_base2006 = 249

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jan-2012

Hardware Availability: Mar-2011

Software Availability: Dec-2011

## Platform Notes (Continued)

running on localhost.localdomain Mon Jan 23 00:36:16 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU X5650 @ 2.67GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 8 9 10
  physical 1: cores 0 1 2 8 9 10
cache size : 12288 KB

```

```

From /proc/meminfo
MemTotal:      98999864 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 23 00:34

```

SPEC is set to: /opt/cpu2006
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda1       ext4      551G      5.5G  517G    2% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/opt/cpu2006/libs/32:/opt/cpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 255

Cisco UCS B200 M2 (Intel Xeon X5650, 2.67 GHz)

SPECfp\_rate\_base2006 = 249

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages disabled with:  
echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 255

Cisco UCS B200 M2 (Intel Xeon X5650, 2.67 GHz)

SPECfp\_rate\_base2006 = 249

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 255

Cisco UCS B200 M2 (Intel Xeon X5650, 2.67 GHz)

SPECfp\_rate\_base2006 = 249

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 255

Cisco UCS B200 M2 (Intel Xeon X5650, 2.67 GHz)

SPECfp\_rate\_base2006 = 249

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:41:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 February 2012.