



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp<sup>®</sup>\_rate2006 = 430

NovaScale R440 F3 (Intel Xeon E5-2650, 2.00 GHz)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

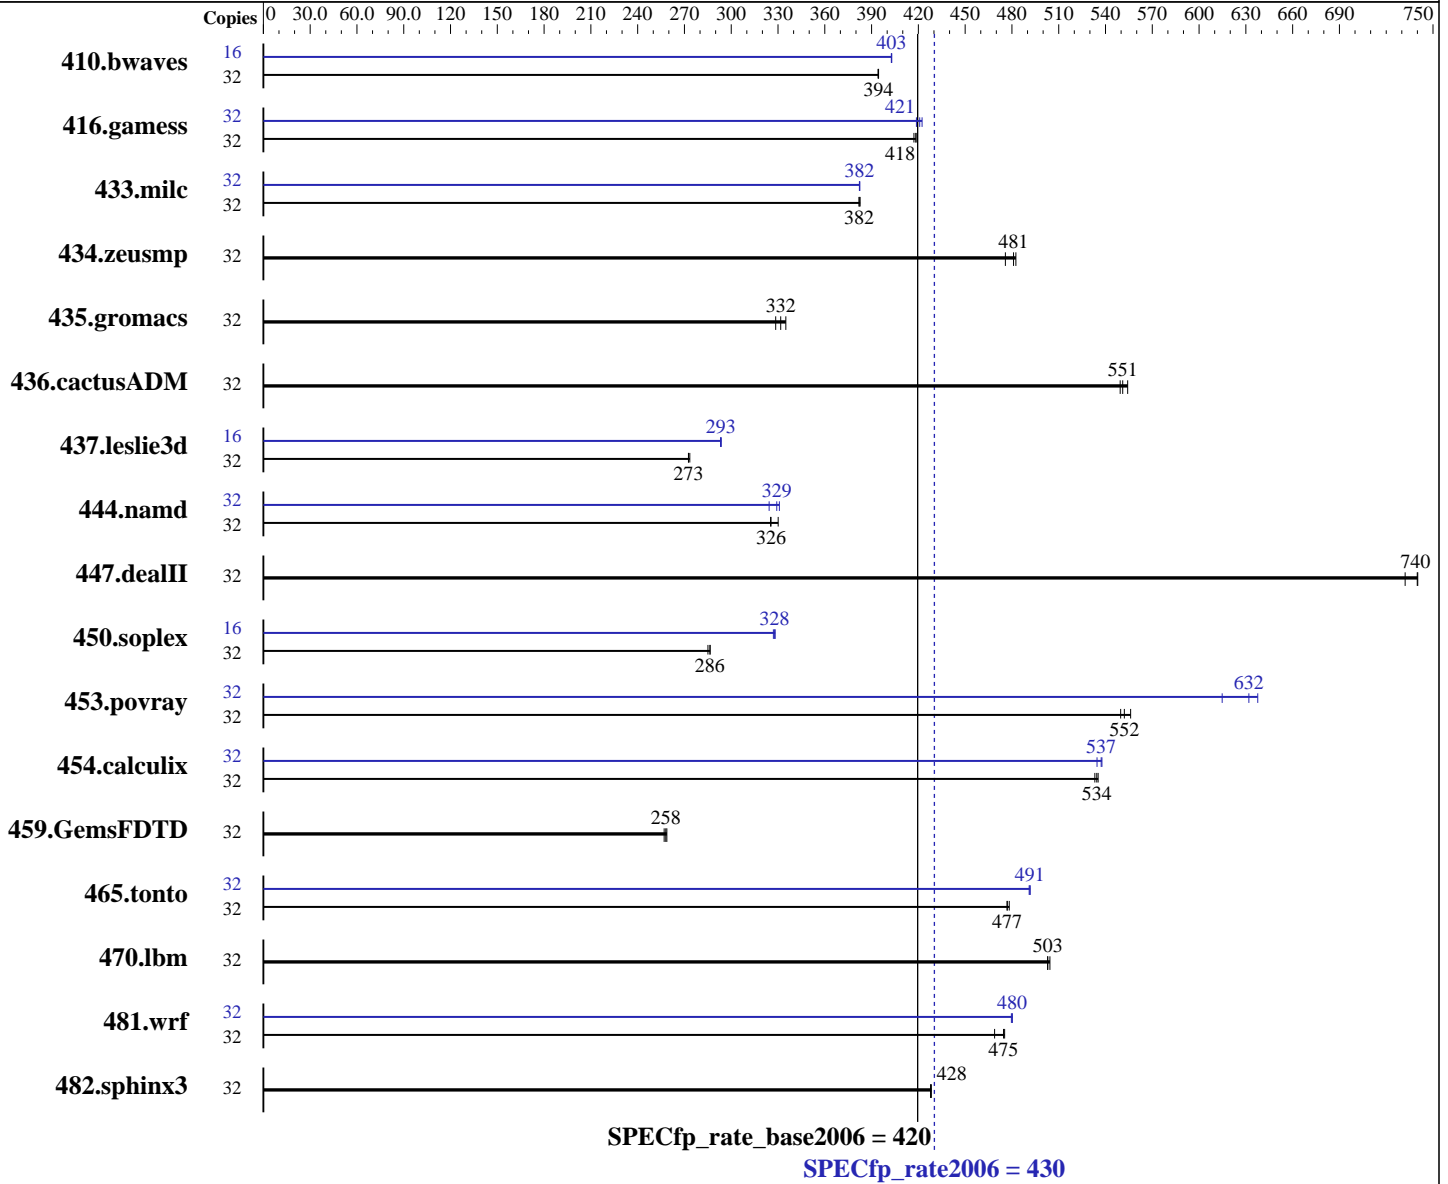

### Hardware

CPU Name: Intel Xeon E5-2650  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.9-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 430

NovaScale R440 F3 (Intel Xeon E5-2650, 2.00 GHz)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 2 x 146 GB 15000 RPM SAS, RAID 0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1103	394	<b><u>1103</u></b>	<b><u>394</u></b>	1102	394	16	540	403	540	403	<b><u>540</u></b>	<b><u>403</u></b>
416.gamess	32	<b><u>1497</u></b>	<b><u>418</u></b>	1502	417	1497	418	32	<b><u>1489</u></b>	<b><u>421</u></b>	1496	419	1483	422
433.milc	32	768	383	<b><u>769</u></b>	<b><u>382</u></b>	769	382	32	768	382	<b><u>769</u></b>	<b><u>382</u></b>	769	382
434.zeusmp	32	<b><u>605</u></b>	<b><u>481</u></b>	603	483	612	476	32	<b><u>605</u></b>	<b><u>481</u></b>	603	483	612	476
435.gromacs	32	682	335	695	329	<b><u>689</u></b>	<b><u>332</u></b>	32	682	335	695	329	<b><u>689</u></b>	<b><u>332</u></b>
436.cactusADM	32	690	554	696	549	<b><u>694</u></b>	<b><u>551</u></b>	32	690	554	696	549	<b><u>694</u></b>	<b><u>551</u></b>
437.leslie3d	32	1100	273	1104	273	<b><u>1103</u></b>	<b><u>273</u></b>	16	513	293	512	294	<b><u>513</u></b>	<b><u>293</u></b>
444.namd	32	777	330	789	325	<b><u>788</u></b>	<b><u>326</u></b>	32	776	331	791	324	<b><u>780</u></b>	<b><u>329</u></b>
447.dealII	32	495	740	500	732	<b><u>495</u></b>	<b><u>740</u></b>	32	495	740	500	732	<b><u>495</u></b>	<b><u>740</u></b>
450.soplex	32	<b><u>932</u></b>	<b><u>286</u></b>	932	286	936	285	16	407	328	<b><u>407</u></b>	<b><u>328</u></b>	408	327
453.povray	32	<b><u>308</u></b>	<b><u>552</u></b>	306	556	310	550	32	<b><u>269</u></b>	<b><u>632</u></b>	267	638	277	615
454.calculix	32	495	533	493	535	<b><u>494</u></b>	<b><u>534</u></b>	32	494	535	<b><u>491</u></b>	<b><u>537</u></b>	491	538
459.GemsFDTD	32	1312	259	<b><u>1316</u></b>	<b><u>258</u></b>	1321	257	32	1312	259	<b><u>1316</u></b>	<b><u>258</u></b>	1321	257
465.tonto	32	658	478	<b><u>660</u></b>	<b><u>477</u></b>	660	477	32	641	491	640	492	<b><u>641</u></b>	<b><u>491</u></b>
470.lbm	32	<b><u>874</u></b>	<b><u>503</u></b>	874	503	872	504	32	<b><u>874</u></b>	<b><u>503</u></b>	874	503	872	504
481.wrf	32	762	469	752	475	<b><u>753</u></b>	<b><u>475</u></b>	32	<b><u>744</u></b>	<b><u>480</u></b>	745	480	744	480
482.sphinx3	32	1458	428	1456	428	<b><u>1457</u></b>	<b><u>428</u></b>	32	1458	428	1456	428	<b><u>1457</u></b>	<b><u>428</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 430

NovaScale R440 F3 (Intel Xeon E5-2650, 2.00 GHz)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Feb-2012  
Hardware Availability: Mar-2012  
Software Availability: Feb-2012

### Platform Notes (Continued)

Turbo Boost set to Enabled  
C States/C1E set to Enabled  
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on unsvr Sat Feb 25 00:19:28 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132089856 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux unsvr 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 24 10:10 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext3  265G   68G  183G  28% /
```

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 430

NovaScale R440 F3 (Intel Xeon E5-2650, 2.00 GHz)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Feb-2012  
Hardware Availability: Mar-2012  
Software Availability: Feb-2012

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
The Dell PowerEdge R620 and the Bull NovaScale R440 F3 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge R620 model  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64  
  
Fortran benchmarks:  
ifort -m64  
  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 430

NovaScale R440 F3 (Intel Xeon E5-2650, 2.00 GHz)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 430

NovaScale R440 F3 (Intel Xeon E5-2650, 2.00 GHz)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
 -inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 430

NovaScale R440 F3 (Intel Xeon E5-2650, 2.00 GHz)

SPECfp\_rate\_base2006 = 420

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:07:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 March 2012.