



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S7, Intel Xeon E5-2620, 2.0 GHz

**SPECfp®2006 = 64.4**

**SPECfp\_base2006 = 61.2**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

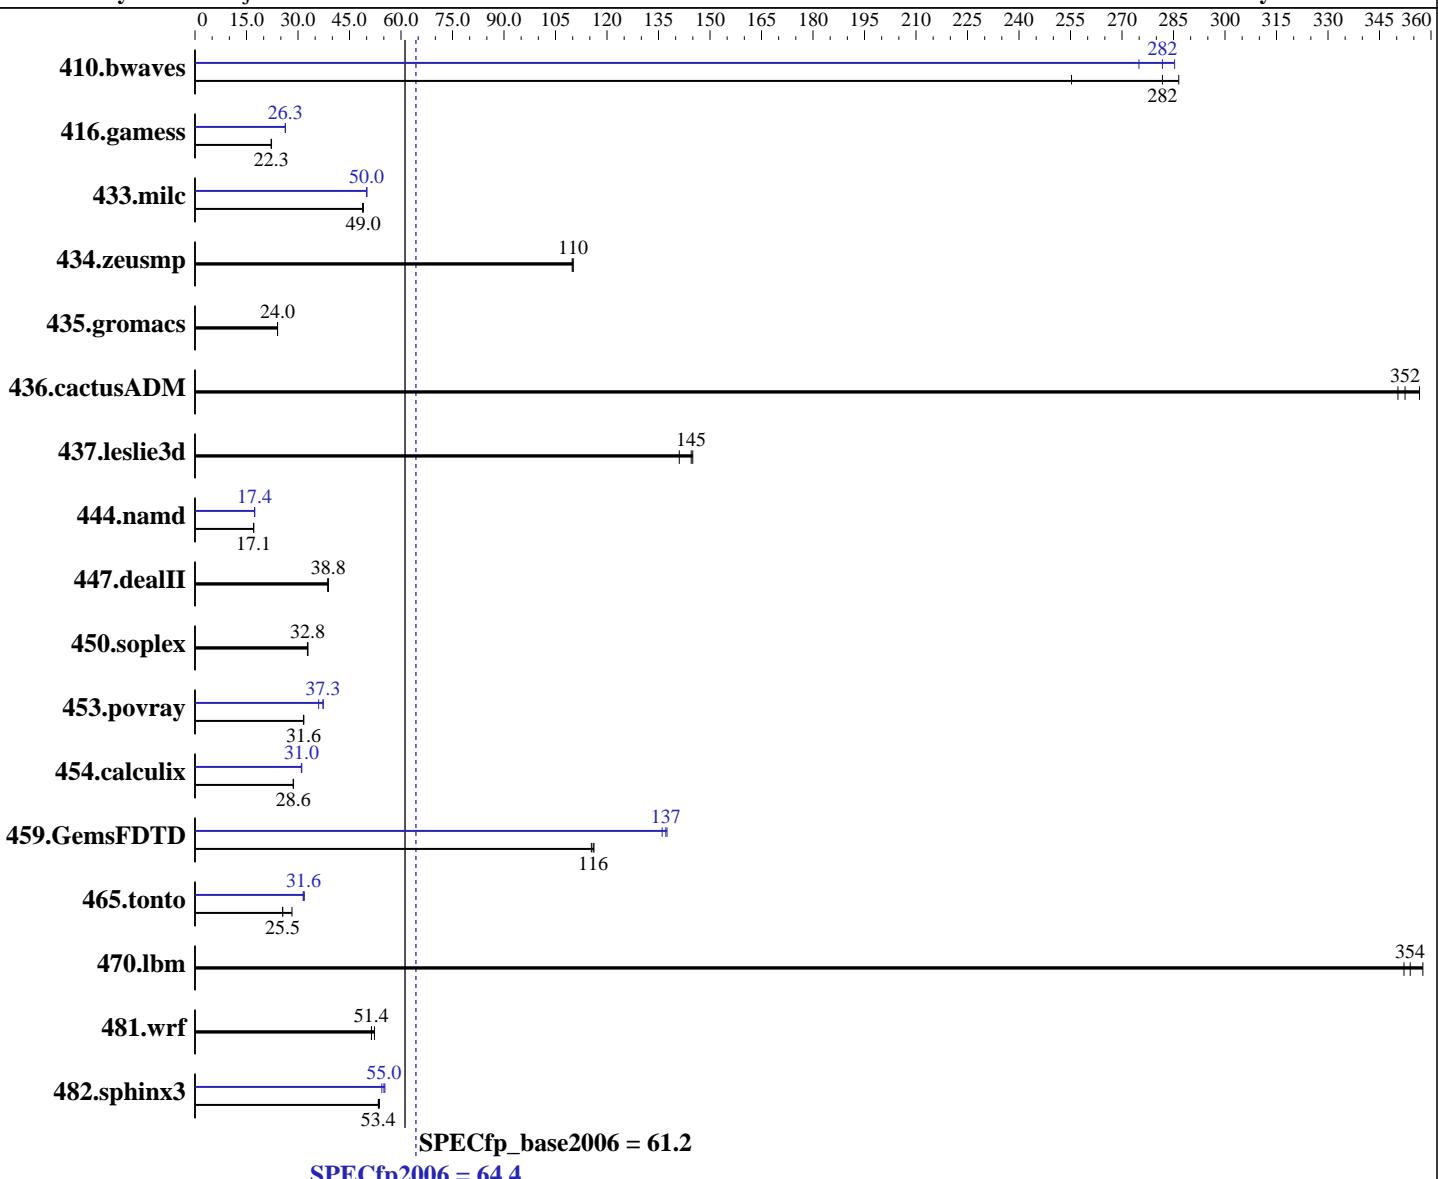

## Hardware

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: 2.6.32-220.el6.x86\_64  
 C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX300 S7, Intel Xeon E5-2620, 2.0 GHz

**SPECfp2006 = 64.4**

CPU2006 license: 19

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Test sponsor: Fujitsu

Tested by: Fujitsu

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	53.2	255	<b>48.2</b>	<b>282</b>	47.4	287	<b>47.6</b>	<b>285</b>	49.4	275	<b>48.2</b>	<b>282</b>
416.gamess	883	22.2	<b>879</b>	<b>22.3</b>	878	22.3	<b>744</b>	<b>26.3</b>	<b>744</b>	<b>26.3</b>	743	26.3
433.milc	188	48.8	187	49.0	<b>187</b>	<b>49.0</b>	<b>183</b>	<b>50.0</b>	183	50.1	184	50.0
434.zeusmp	82.6	110	<b>82.6</b>	<b>110</b>	82.8	110	82.6	110	<b>82.6</b>	<b>110</b>	82.8	110
435.gromacs	297	24.0	<b>297</b>	<b>24.0</b>	297	24.0	<b>297</b>	<b>24.0</b>	<b>297</b>	<b>24.0</b>	297	24.0
436.cactusADM	<b>33.9</b>	<b>352</b>	33.5	357	34.1	350	<b>33.9</b>	<b>352</b>	33.5	357	34.1	350
437.leslie3d	64.8	145	66.6	141	<b>65.0</b>	<b>145</b>	64.8	145	66.6	141	<b>65.0</b>	<b>145</b>
444.namd	<b>470</b>	<b>17.1</b>	470	17.1	469	17.1	<b>462</b>	<b>17.4</b>	462	17.4	462	17.4
447.dealII	296	38.7	<b>295</b>	<b>38.8</b>	295	38.8	<b>296</b>	<b>38.7</b>	<b>295</b>	<b>38.8</b>	295	38.8
450.soplex	<b>254</b>	<b>32.8</b>	254	32.9	255	32.7	<b>254</b>	<b>32.8</b>	254	32.9	255	32.7
453.povray	<b>168</b>	<b>31.6</b>	168	31.6	168	31.7	<b>148</b>	<b>36.0</b>	142	37.4	<b>143</b>	<b>37.3</b>
454.calculix	287	28.7	288	28.6	<b>288</b>	<b>28.6</b>	265	31.1	266	31.0	<b>266</b>	<b>31.0</b>
459.GemsFDTD	91.9	115	91.3	116	<b>91.5</b>	<b>116</b>	<b>77.2</b>	137	78.0	136	<b>77.4</b>	<b>137</b>
465.tonto	348	28.2	385	25.5	<b>385</b>	<b>25.5</b>	312	31.5	<b>311</b>	<b>31.6</b>	309	31.8
470.lbm	<b>38.8</b>	<b>354</b>	39.0	352	38.4	358	<b>38.8</b>	<b>354</b>	39.0	352	38.4	358
481.wrf	217	51.4	214	52.3	<b>217</b>	<b>51.4</b>	217	51.4	214	52.3	<b>217</b>	<b>51.4</b>
482.sphinx3	<b>365</b>	<b>53.4</b>	365	53.4	363	53.7	<b>352</b>	<b>55.3</b>	358	54.4	<b>354</b>	<b>55.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Intel HT Technology = Disable

Frequency Floor Override = Enable



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S7, Intel Xeon E5-2620, 2.0 GHz

**SPECfp2006 =**

**64.4**

**SPECfp\_base2006 =**

**61.2**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:**

Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enable

This result was measured on the PRIMERGY RX350 S7. The PRIMERGY RX350 S7 and the PRIMERGY TX300 S7 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S7, Intel Xeon E5-2620, 2.0 GHz

**SPECfp2006 = 64.4**

CPU2006 license: 19

Test date: Feb-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

470.lbm: basepeak = yes

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S7, Intel Xeon E5-2620, 2.0 GHz

SPECfp2006 =

64.4

SPECfp\_base2006 =

61.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date:

Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Fujitsu\\_Platform.20120320.html](http://www.spec.org/cpu2006/flags/Fujitsu_Platform.20120320.html)

[http://www.spec.org/cpu2006/flags/Intel\\_icl2.1-official-linux64.20111122.html](http://www.spec.org/cpu2006/flags/Intel_icl2.1-official-linux64.20111122.html)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S7, Intel Xeon E5-2620, 2.0 GHz

**SPECfp2006 = 64.4**

**SPECfp\_base2006 = 61.2**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 06:53:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 April 2012.