



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6212)

SPECfp®\_rate2006 = 249

SPECfp\_rate\_base2006 = 234

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

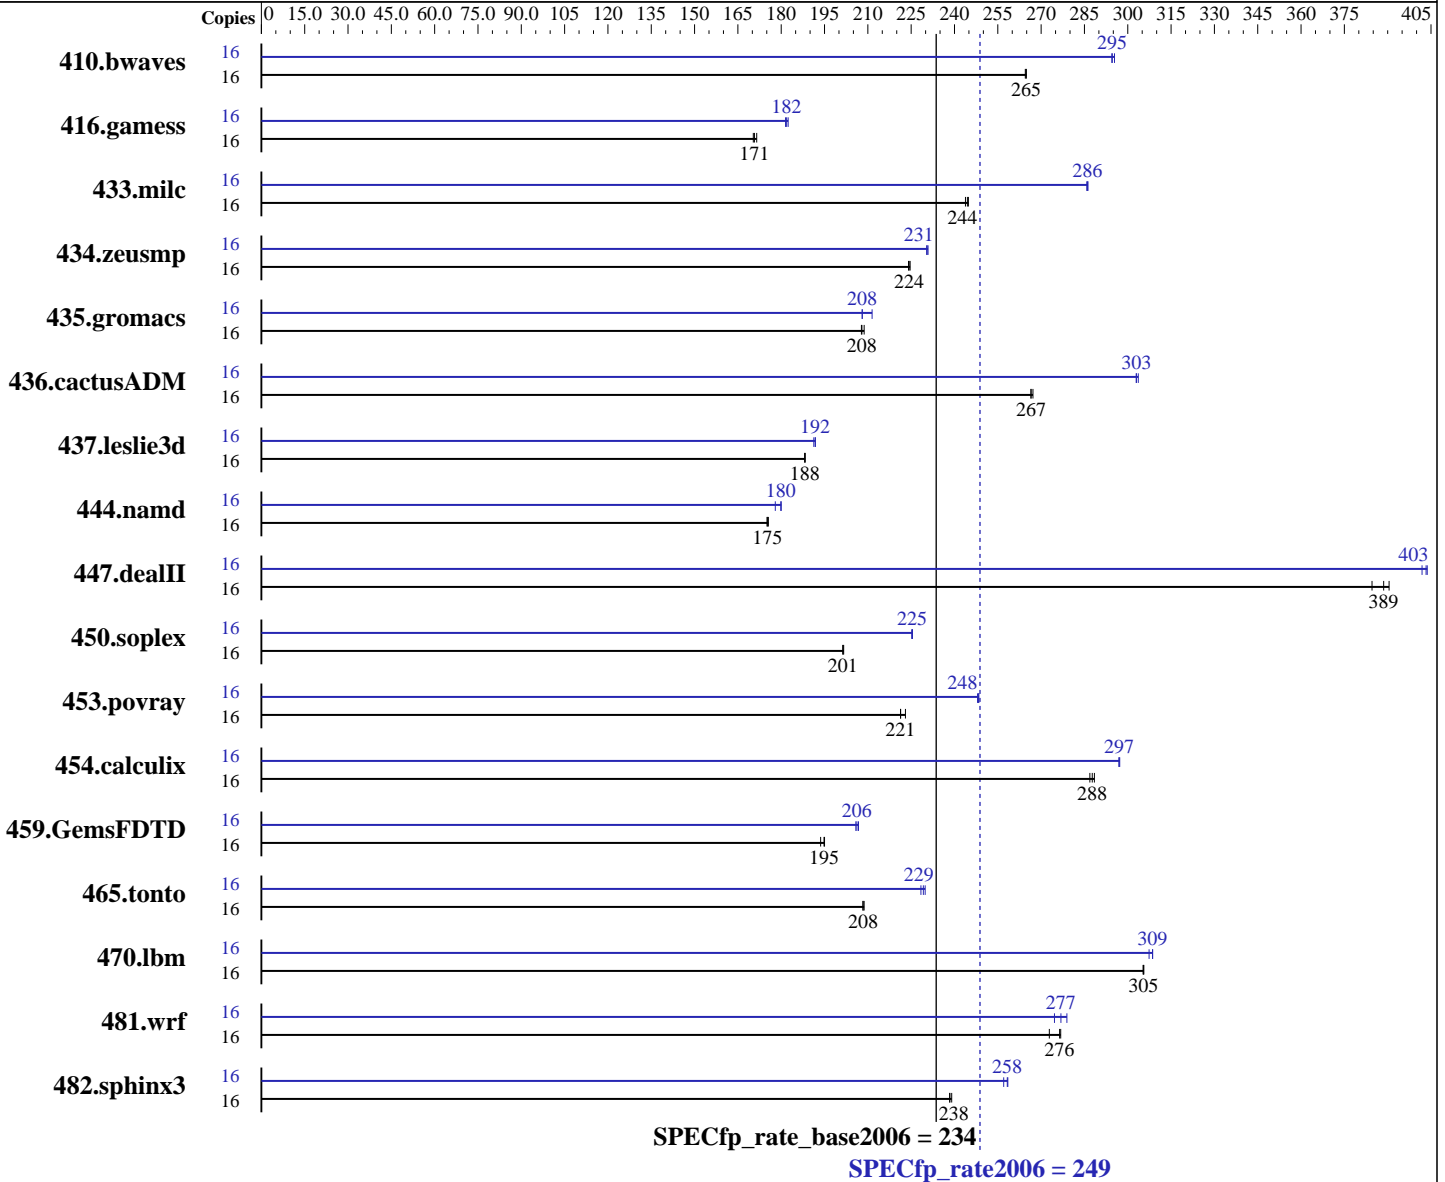

### Hardware

CPU Name: AMD Opteron 6212  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6212)

SPECfp\_rate2006 = 249

SPECfp\_rate\_base2006 = 234

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Primary Cache: 256 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 4 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 1024 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<u>821</u>	<u>265</u>	822	265	821	265	16	<u>738</u>	<u>295</u>	738	294	736	295
416.gamess	16	<u>1835</u>	<u>171</u>	1839	170	1827	172	16	1718	182	<u>1722</u>	<u>182</u>	1726	181
433.milc	16	602	244	600	245	<u>601</u>	<u>244</u>	16	513	286	<u>513</u>	<u>286</u>	514	286
434.zeusmp	16	<u>649</u>	<u>224</u>	650	224	648	225	16	<u>632</u>	<u>231</u>	631	231	632	230
435.gromacs	16	547	209	<u>549</u>	<u>208</u>	550	208	16	549	208	<u>549</u>	<u>208</u>	540	211
436.cactusADM	16	718	266	716	267	<u>717</u>	<u>267</u>	16	630	304	631	303	<u>631</u>	<u>303</u>
437.leslie3d	16	<u>799</u>	<u>188</u>	799	188	799	188	16	786	191	784	192	<u>784</u>	<u>192</u>
444.namd	16	731	176	<u>732</u>	<u>175</u>	733	175	16	<u>713</u>	<u>180</u>	721	178	713	180
447.dealII	16	<u>471</u>	<u>389</u>	476	385	469	390	16	<u>454</u>	<u>403</u>	453	404	455	402
450.soplex	16	662	202	663	201	<u>663</u>	<u>201</u>	16	592	225	593	225	<u>592</u>	<u>225</u>
453.povray	16	<u>385</u>	<u>221</u>	385	221	382	223	16	343	248	<u>343</u>	<u>248</u>	343	248
454.calculix	16	458	288	460	287	<u>459</u>	<u>288</u>	16	444	297	<u>444</u>	<u>297</u>	444	297
459.GemsFDTD	16	871	195	<u>871</u>	<u>195</u>	877	194	16	821	207	825	206	<u>823</u>	<u>206</u>
465.tonto	16	754	209	756	208	<u>756</u>	<u>208</u>	16	685	230	689	228	<u>687</u>	<u>229</u>
470.lbm	16	<u>720</u>	<u>305</u>	719	306	720	305	16	<u>712</u>	<u>309</u>	715	307	712	309
481.wrf	16	646	277	<u>647</u>	<u>276</u>	655	273	16	651	275	641	279	<u>646</u>	<u>277</u>
482.sphinx3	16	<u>1308</u>	<u>238</u>	1308	238	1305	239	16	1206	258	1213	257	<u>1207</u>	<u>258</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6212)

SPECfp\_rate2006 = 249

SPECfp\_rate\_base2006 = 234

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2012  
Hardware Availability: Nov-2011  
Software Availability: Dec-2011

## Operating System Notes (Continued)

Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf  
  
Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1104-rate-libs-revB/32:/usr/cpu2006/amd1104-rate-libs-revB/64"  
  
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>  
  
Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
  opencc  
  
C++ benchmarks:  
  openCC  
  
Fortran benchmarks:  
  openf95  
  
Benchmarks using both Fortran and C:  
  opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
  433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
  444.namd: -DSPEC\_CPU\_LP64  
  447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
  465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6212)

SPECfp\_rate2006 = 249

SPECfp\_rate\_base2006 = 234

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso

### C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

### Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso

### Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

openc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6212)

SPECfp\_rate2006 = 249

SPECfp\_rate\_base2006 = 234

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
      -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
      -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
      -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
      -OPT:unroll_times_max=8 -OPT:unroll_size=256
      -OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
      -IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
      -CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
      -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
      -CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
      -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
      -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
      -fno-emit-exceptions -m32 -OPT:unroll_times_max=8
      -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
      -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
      -TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
      -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6212)

SPECfp\_rate2006 = 249

SPECfp\_rate\_base2006 = 234

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

450.soplex (continued):

-OPT:fold\_unsigned\_relops=on -fno-exceptions -m32  
-HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2  
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
-LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp\_peep=on

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off

-HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0

-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll\_size=0 -LNO:fission=2

-CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias

-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
-WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256

-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6212)

SPECfp\_rate2006 = 249

SPECfp\_rate\_base2006 = 234

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

```
481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on
        -CG:load_exe=1 -HP -WOPT:sib=on
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html>  
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml>  
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 07:52:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 April 2012.