



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x240 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp®_rate2006 = 507

SPECfp_rate_base2006 = 490

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

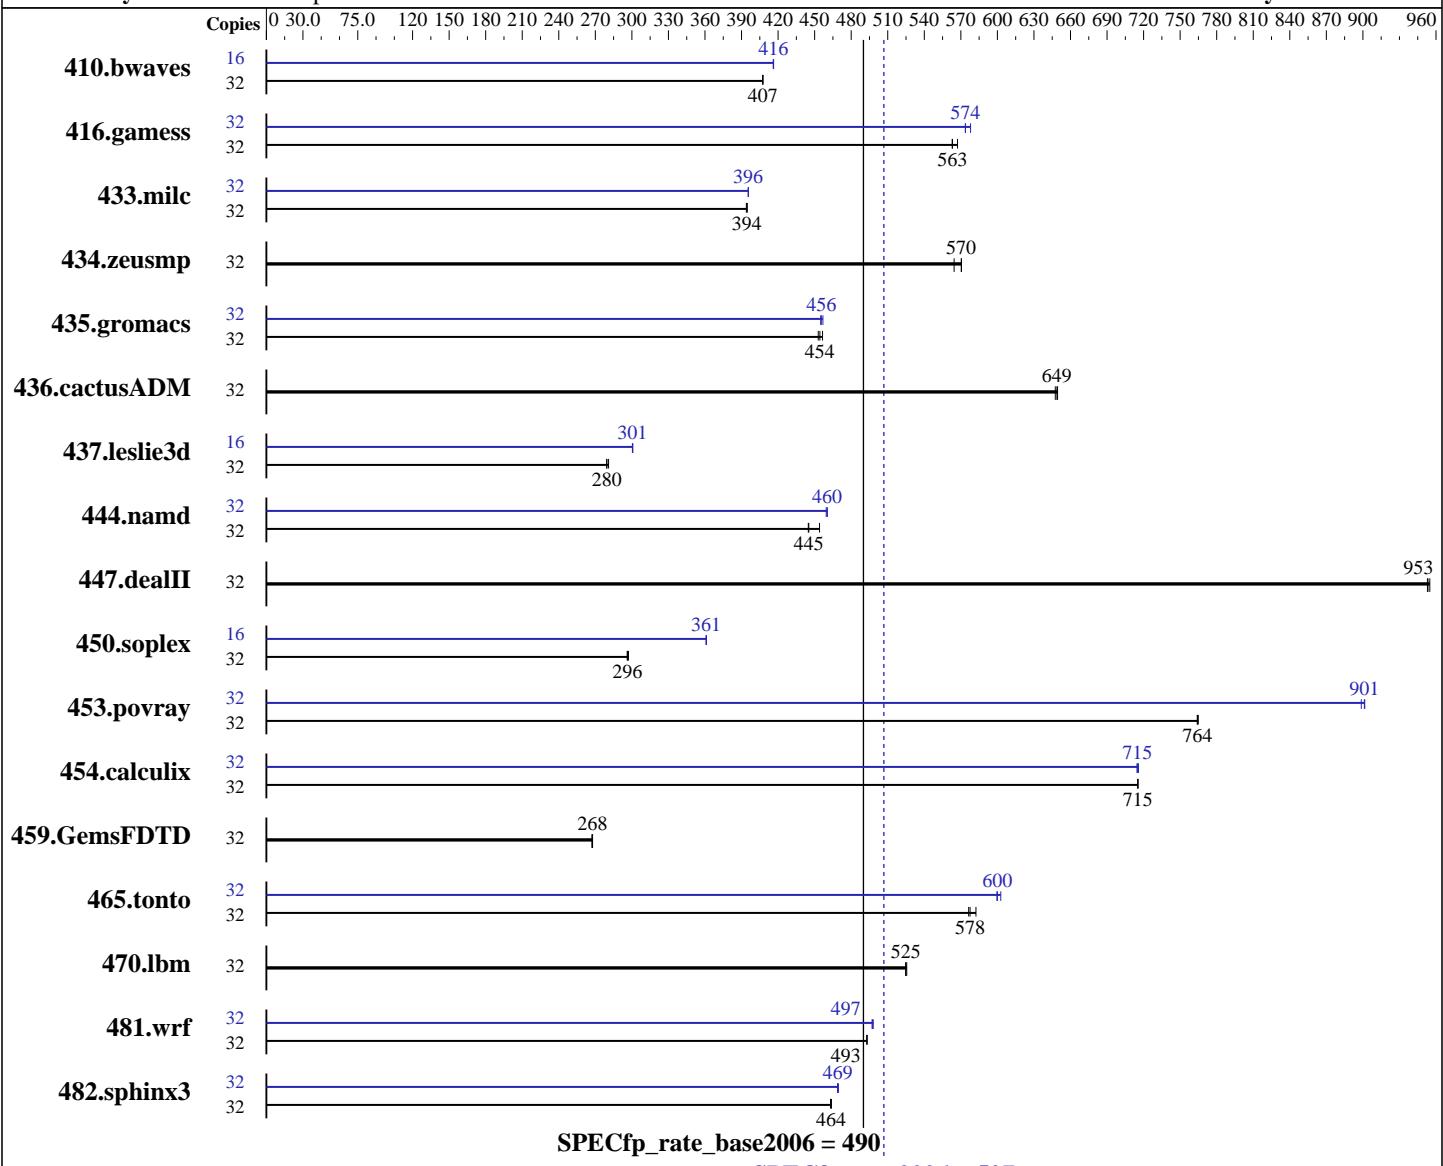

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Compiler: 2.6.32-220.el6.x86_64
 C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x240 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate2006 = 507

SPECfp_rate_base2006 = 490

CPU2006 license: 11

Test date: Feb-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1067	407	1067	408	1067	407	16	523	416	522	416	522	416
416.gamess	32	1105	567	1113	563	1113	563	32	1092	574	1084	578	1092	574
433.milc	32	746	394	744	395	745	394	32	743	396	742	396	743	396
434.zeusmp	32	511	570	516	564	510	571	32	511	570	516	564	510	571
435.gromacs	32	504	453	503	454	501	456	32	500	457	502	456	502	455
436.cactusADM	32	591	648	589	649	589	649	32	591	648	589	649	589	649
437.leslie3d	32	1071	281	1077	279	1076	280	16	500	301	500	301	501	300
444.namd	32	565	454	576	445	577	445	32	557	460	558	460	559	459
447.dealII	32	384	953	384	953	383	955	32	384	953	384	953	383	955
450.soplex	32	898	297	901	296	901	296	16	370	361	369	361	370	361
453.povray	32	223	764	223	764	223	765	32	189	899	189	901	189	902
454.calculix	32	369	715	369	715	369	715	32	369	715	369	716	369	715
459.GemsFDTD	32	1271	267	1268	268	1268	268	32	1271	267	1268	268	1268	268
465.tonto	32	545	578	546	576	541	582	32	522	603	525	600	525	600
470.lbm	32	838	525	838	525	837	526	32	838	525	838	525	837	526
481.wrf	32	725	493	725	493	725	493	32	719	497	719	497	718	498
482.sphinx3	32	1347	463	1345	464	1345	464	32	1328	470	1330	469	1330	469

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Maximum Performance in BIOS
 Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x240 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate2006 = 507

SPECfp_rate_base2006 = 490

CPU2006 license: 11

Test date: Feb-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Platform Notes (Continued)

running on blacktip-pete Sat Feb 11 04:12:24 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
        2 "physical id"s (chips)
        32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 8
        siblings   : 16
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
    cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:       132136204 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux blacktip-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 9 12:45
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_blacktipete-lv_root
                ext4   265G   62G  190G  25%  /
```

Additional information from dmidecode:

```
Memory:
4x Hynix HMT31GR7CFR4C-PB 8 GB 1600 MHz 2 rank
12x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x240 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate2006 = 507

SPECfp_rate_base2006 = 490

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/lib32:/cpu2006.1.2/lib64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RHEL5.5

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x240 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate2006 = 507

SPECfp_rate_base2006 = 490

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3:

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex:

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves:

```
-DSPEC_CPU_LP64
```


416.gamess:

```
-DSPEC_CPU_LP64
```


433.milc:

```
-DSPEC_CPU_LP64
```


434.zeusmp:

```
-DSPEC_CPU_LP64
```


435.gromacs:

```
-DSPEC_CPU_LP64 -nofor_main
```


436.cactusADM:

```
-DSPEC_CPU_LP64 -nofor_main
```


437.leslie3d:

```
-DSPEC_CPU_LP64
```


444.namd:

```
-DSPEC_CPU_LP64
```


447.dealII:

```
-DSPEC_CPU_LP64
```


453.povray:

```
-DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x240 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate2006 = 507

SPECfp_rate_base2006 = 490

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -opt-mem-layout-trans=3
```

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static
```

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep- -static
```

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x240 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate2006 = 507

SPECfp_rate_base2006 = 490

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:15:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 May 2012.