



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Itautec**

**SPECint®\_rate2006 = 525**

Servidor Itautec MX225 (Intel Xeon E5-2650)

**SPECint\_rate\_base2006 = 511**

CPU2006 license: 9001


**Test date:** Apr-2012

**Test sponsor:** Itautec

**Hardware Availability:** Jun-2012

**Tested by:** Itautec

**Software Availability:** Dec-2011

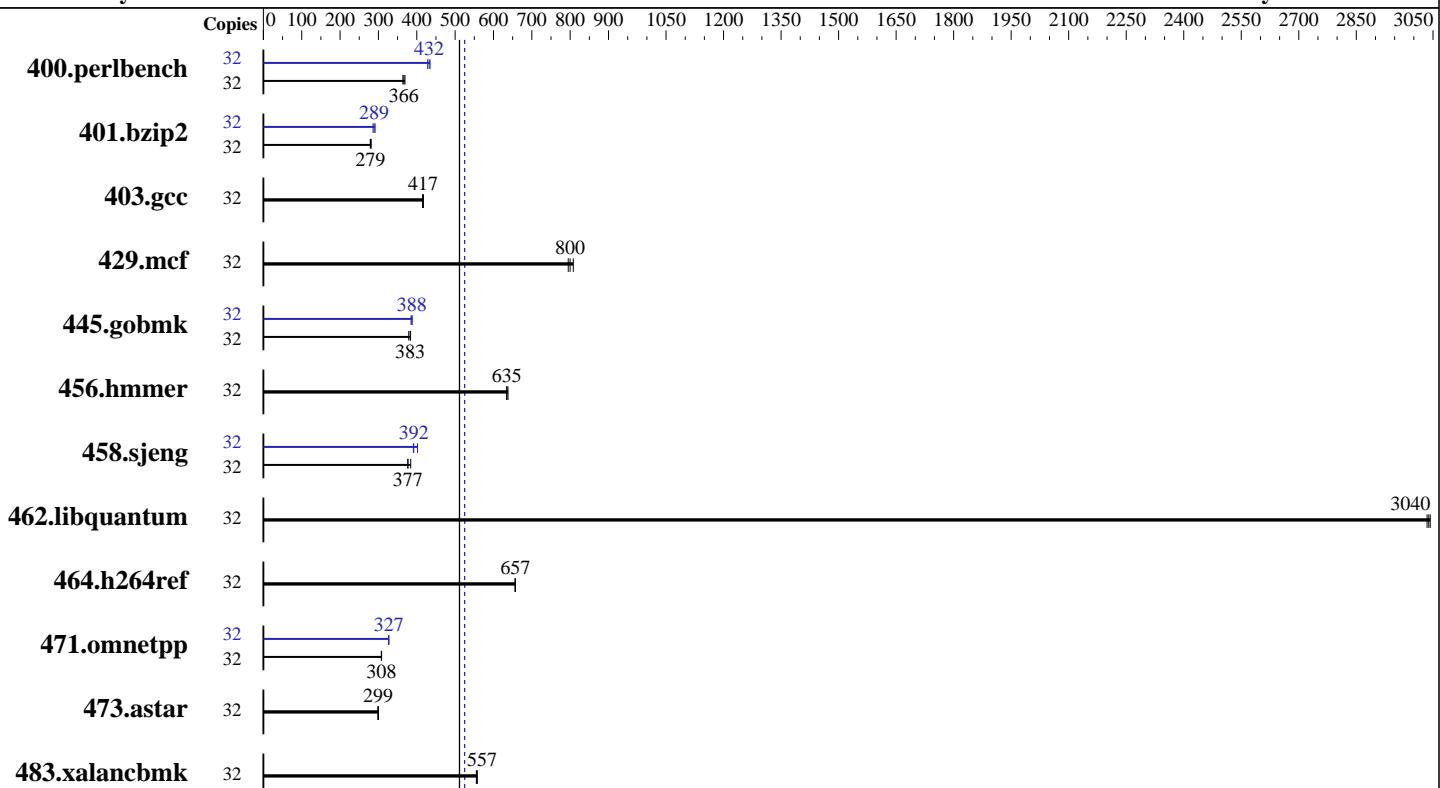

**SPECint\_rate\_base2006 = 511**

**SPECint\_rate2006 = 525**

## Hardware

CPU Name: Intel Xeon E5-2650  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 146 GB, SAS, 15000 RPM, RAID 0  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

**SPECint\_rate2006 = 525**

Servidor Itautech MX225 (Intel Xeon E5-2650)

**SPECint\_rate\_base2006 = 511**

CPU2006 license: 9001

Test date: Apr-2012

Test sponsor: Itautech

Hardware Availability: Jun-2012

Tested by: Itautech

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	847	369	859	364	<b>853</b>	<b>366</b>	32	730	428	<b>723</b>	<b>432</b>	719	435
401.bzip2	32	1098	281	<b>1106</b>	<b>279</b>	1107	279	32	<b>1069</b>	<b>289</b>	1060	291	1080	286
403.gcc	32	<b>618</b>	<b>417</b>	621	415	618	417	32	<b>618</b>	<b>417</b>	621	415	618	417
429.mcf	32	361	808	367	795	<b>365</b>	<b>800</b>	32	361	808	367	795	<b>365</b>	<b>800</b>
445.gobmk	32	875	384	<b>877</b>	<b>383</b>	886	379	32	872	385	<b>866</b>	<b>388</b>	866	388
456.hmmer	32	471	635	468	638	<b>470</b>	<b>635</b>	32	471	635	468	638	<b>470</b>	<b>635</b>
458.sjeng	32	<b>1027</b>	<b>377</b>	1008	384	1028	377	32	990	391	963	402	<b>988</b>	<b>392</b>
462.libquantum	32	218	3040	218	3030	<b>218</b>	<b>3040</b>	32	218	3040	218	3030	<b>218</b>	<b>3040</b>
464.h264ref	32	1077	657	<b>1078</b>	<b>657</b>	1079	656	32	1077	657	<b>1078</b>	<b>657</b>	1079	656
471.omnetpp	32	649	308	<b>649</b>	<b>308</b>	650	308	32	613	326	611	327	<b>612</b>	<b>327</b>
473.astar	32	749	300	<b>751</b>	<b>299</b>	752	299	32	749	300	<b>751</b>	<b>299</b>	752	299
483.xalancbmk	32	398	555	396	558	<b>397</b>	<b>557</b>	32	398	555	396	558	<b>397</b>	<b>557</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

```
Sysinfo program /home/rcaaneca/cpu2006/Docs/sysinfo
$Rev: 6775 $ $Date::: 2011-08-16 #$
running on itautech.mx4 Wed Apr 11 17:50:26 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 8
        siblings  : 16
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint\_rate2006 = 525

Servidor Itaute MX225 (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 511

CPU2006 license: 9001

Test date: Apr-2012

Test sponsor: Itaute

Hardware Availability: Jun-2012

Tested by: Itaute

Software Availability: Dec-2011

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:       65918772 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux itaute.mx4 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 11 17:49

SPEC is set to: /home/rccaneca/cpu2006
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/mapper/vg_itaute-lv_home
                  ext4   35G   5.0G   28G  16% /home

(End of data from sysinfo program)
```

## General Notes

This result was measured on the Servidor Itaute MX215.  
The Servidor Itaute MX215 and the Servidor Itaute MX225  
are electronically equivalent.

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

Servidor Itaute MX225 (Intel Xeon E5-2650)

**SPECint\_rate2006 = 525**

CPU2006 license: 9001

Test sponsor: Itaute

Tested by: Itaute

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/home/rcaaneca/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint\_rate2006 = 525

Servidor Itaute MX225 (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 511

CPU2006 license: 9001

Test date: Apr-2012

Test sponsor: Itaute

Hardware Availability: Jun-2012

Tested by: Itaute

Software Availability: Dec-2011

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: basepeak = yes

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/racaneca/sh/SmartHeap\_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX225 (Intel Xeon E5-2650)

**SPECint\_rate2006 = 525**

**CPU2006 license:** 9001

**Test sponsor:** Itautec

**Tested by:** Itautec

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.html](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.xml](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 04:49:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 May 2012.