



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2620)

**SPECfp®2006 = 65.0**

**SPECfp\_base2006 = 61.6**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

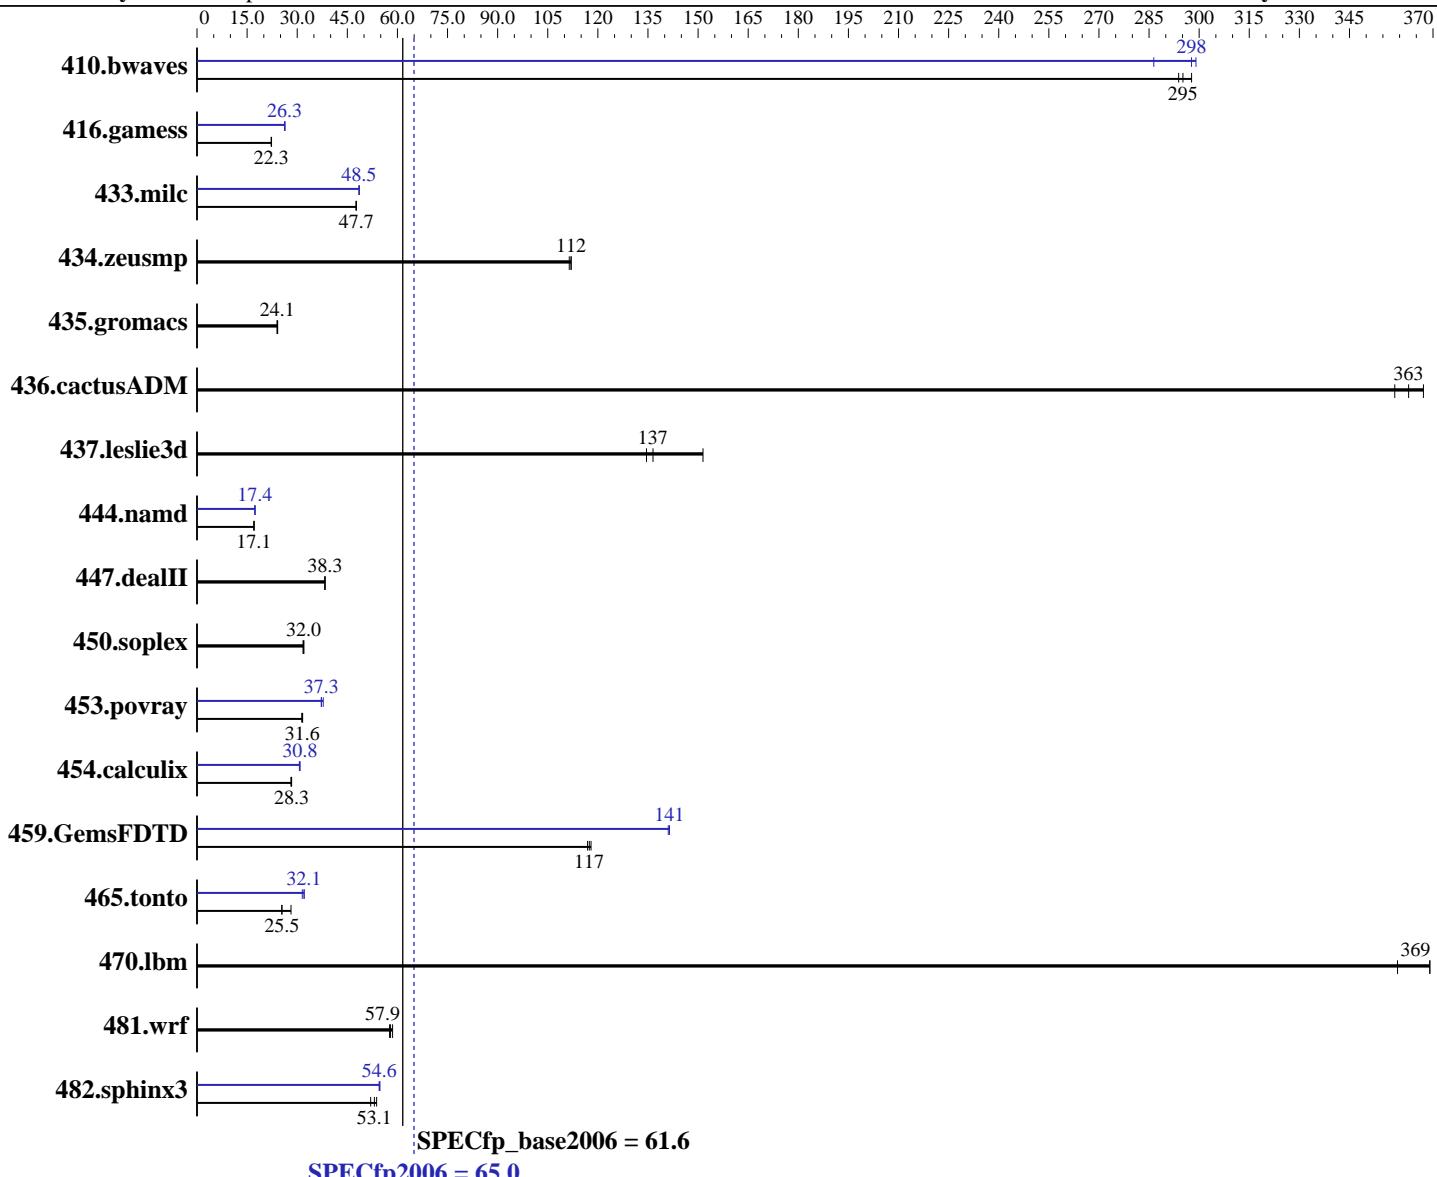

### Hardware

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2620)

**SPECfp2006 = 65.0**

**SPECfp\_base2006 = 61.6**

CPU2006 license: 001176

Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>46.0</b>	<b>295</b>	45.6	298	46.2	294	<b>47.4</b>	<b>286</b>	<b>45.4</b>	<b>299</b>	<b>45.6</b>	<b>298</b>
416.gamess	881	22.2	877	22.3	<b>880</b>	<b>22.3</b>	<b>745</b>	<b>26.3</b>	744	26.3	746	26.3
433.milc	<b>193</b>	<b>47.7</b>	193	47.7	193	47.7	<b>189</b>	<b>48.5</b>	189	48.5	189	48.6
434.zeusmp	81.7	111	<b>81.3</b>	<b>112</b>	81.3	112	81.7	111	<b>81.3</b>	<b>112</b>	81.3	112
435.gromacs	296	24.2	298	24.0	<b>297</b>	<b>24.1</b>	296	24.2	298	24.0	<b>297</b>	<b>24.1</b>
436.cactusADM	33.3	359	<b>32.9</b>	<b>363</b>	32.5	367	33.3	359	<b>32.9</b>	<b>363</b>	32.5	367
437.leslie3d	69.9	135	<b>68.9</b>	<b>137</b>	62.1	151	69.9	135	<b>68.9</b>	<b>137</b>	62.1	151
444.namd	470	17.1	470	17.1	<b>470</b>	<b>17.1</b>	<b>462</b>	<b>17.4</b>	462	17.4	463	17.3
447.dealII	<b>299</b>	<b>38.3</b>	299	38.3	298	38.4	<b>299</b>	<b>38.3</b>	299	38.3	298	38.4
450.soplex	<b>261</b>	<b>32.0</b>	261	32.0	263	31.7	<b>261</b>	<b>32.0</b>	261	32.0	263	31.7
453.povray	168	31.6	<b>169</b>	<b>31.6</b>	170	31.4	<b>143</b>	<b>37.3</b>	141	37.8	143	37.2
454.calculix	291	28.3	<b>292</b>	<b>28.3</b>	294	28.1	269	30.6	268	30.8	<b>268</b>	<b>30.8</b>
459.GemsFDTD	89.9	118	90.7	117	<b>90.3</b>	<b>117</b>	75.2	141	<b>75.0</b>	<b>141</b>	75.0	141
465.tonto	388	25.4	<b>386</b>	<b>25.5</b>	350	28.1	307	32.1	312	31.5	<b>307</b>	<b>32.1</b>
470.lbm	37.2	369	<b>37.2</b>	<b>369</b>	38.2	359	37.2	369	<b>37.2</b>	<b>369</b>	38.2	359
481.wrf	194	57.6	191	58.6	<b>193</b>	<b>57.9</b>	194	57.6	191	58.6	<b>193</b>	<b>57.9</b>
482.sphinx3	<b>367</b>	<b>53.1</b>	362	53.8	375	52.0	<b>356</b>	<b>54.8</b>	<b>357</b>	<b>54.6</b>	357	54.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2620)

**SPECfp2006 = 65.0**

**SPECfp\_base2006 = 61.6**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

## Base Compiler Invocation

C benchmarks:

  icc -m64

C++ benchmarks:

  icpc -m64

Fortran benchmarks:

  ifort -m64

Benchmarks using both Fortran and C:

  icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
  433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
  444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
  465.tonto: -DSPEC\_CPU\_LP64  
  470.lbm: -DSPEC\_CPU\_LP64  
  481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

  -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
  -ansi-alias

C++ benchmarks:

  -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

  -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

  -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
  -ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2620)

**SPECfp2006 = 65.0**

**SPECfp\_base2006 = 61.6**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RFT+ (X9DRW-3TF+, Intel E5-2620)

**SPECfp2006 = 65.0**

**SPECfp\_base2006 = 61.6**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:02:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 May 2012.