



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECfp®2006 = 47.2**

SuperWorkstation 7047A-T (X9DAI, Intel E5-2603)

**SPECfp\_base2006 = 45.3**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

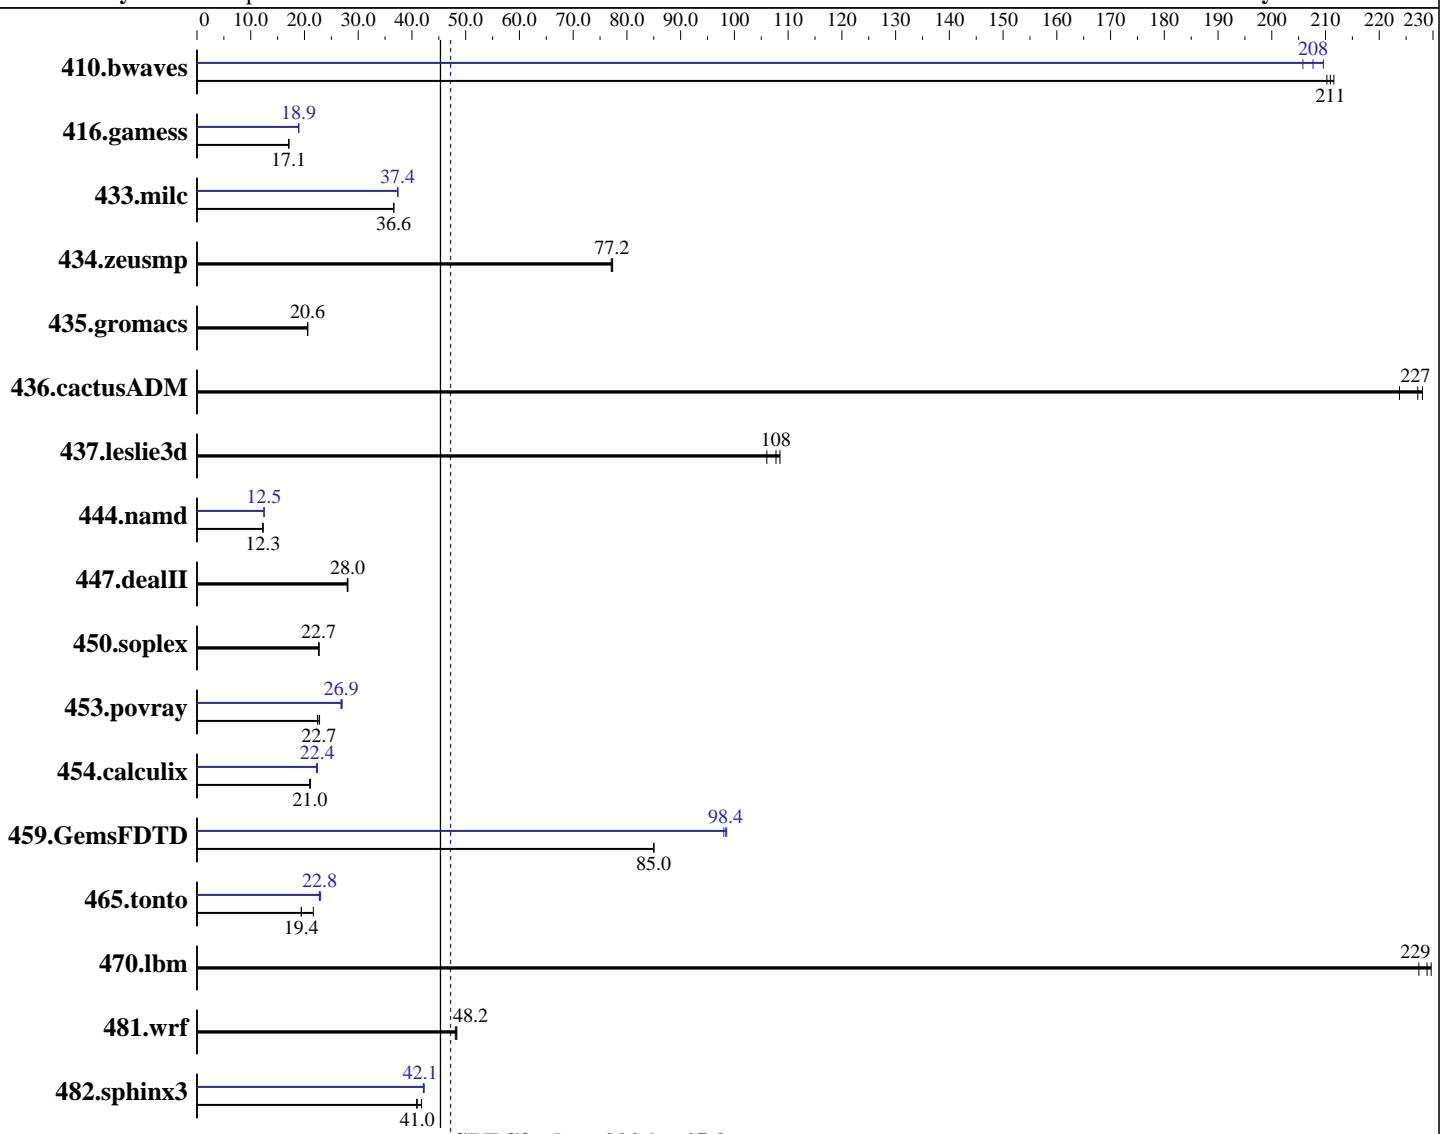

**SPECfp\_base2006 = 45.3**

**SPECfp2006 = 47.2**

### Hardware

CPU Name:	Intel Xeon E5-2603
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

### Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2 (Santiago), Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECfp2006 = 47.2**

SuperWorkstation 7047A-T (X9DAI, Intel E5-2603)

**SPECfp\_base2006 = 45.3**

**CPU2006 license:** 001176

**Test date:** Apr-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2012

**Tested by:** Supermicro

**Software Availability:** Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)  
 Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	64.2	212	<b>64.4</b>	<b>211</b>	64.6	210	64.8	210	<b>65.4</b>	<b>208</b>	66.0	206
416.gamess	1144	17.1	1148	17.1	<b>1147</b>	<b>17.1</b>	1034	18.9	<b>1034</b>	<b>18.9</b>	1036	18.9
433.milc	251	36.6	251	36.6	<b>251</b>	<b>36.6</b>	246	37.4	246	37.3	246	37.4
434.zeusmp	<b>118</b>	<b>77.2</b>	118	77.3	118	77.1	<b>118</b>	<b>77.2</b>	118	77.3	118	77.1
435.gromacs	347	20.6	<b>347</b>	<b>20.6</b>	346	20.6	347	20.6	<b>347</b>	<b>20.6</b>	346	20.6
436.cactusADM	<b>52.6</b>	<b>227</b>	53.4	224	52.4	228	<b>52.6</b>	<b>227</b>	53.4	224	52.4	228
437.leslie3d	88.6	106	<b>87.2</b>	<b>108</b>	86.6	108	88.6	106	<b>87.2</b>	<b>108</b>	86.6	108
444.namd	653	12.3	<b>654</b>	<b>12.3</b>	654	12.3	<b>643</b>	<b>12.5</b>	643	12.5	643	12.5
447.dealII	407	28.1	409	28.0	<b>408</b>	<b>28.0</b>	407	28.1	409	28.0	<b>408</b>	<b>28.0</b>
450.soplex	369	22.6	367	22.7	<b>368</b>	<b>22.7</b>	369	22.6	367	22.7	<b>368</b>	<b>22.7</b>
453.povray	233	22.8	<b>234</b>	<b>22.7</b>	237	22.4	<b>198</b>	<b>26.9</b>	197	27.0	199	26.8
454.calculix	393	21.0	<b>392</b>	<b>21.0</b>	391	21.1	371	22.2	368	22.4	<b>368</b>	<b>22.4</b>
459.GemsFDTD	125	85.0	125	85.0	<b>125</b>	<b>85.0</b>	108	98.0	<b>108</b>	<b>98.4</b>	108	98.6
465.tonto	<b>507</b>	<b>19.4</b>	455	21.6	507	19.4	428	23.0	<b>431</b>	<b>22.8</b>	432	22.8
470.lbm	59.8	230	60.4	227	<b>60.0</b>	<b>229</b>	59.8	230	60.4	227	<b>60.0</b>	<b>229</b>
481.wrf	<b>232</b>	<b>48.2</b>	232	48.1	231	48.4	<b>232</b>	<b>48.2</b>	232	48.1	231	48.4
482.sphinx3	<b>475</b>	<b>41.0</b>	477	40.9	466	41.8	<b>463</b>	<b>42.1</b>	461	42.3	<b>462</b>	<b>42.1</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

The system used an ATI Radeon HD 4870 X2 graphics card

## General Notes

Environment variables set by runspec before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,scatter"  
 LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"  
 OMP\_NUM\_THREADS = "8"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 47.2**

SuperWorkstation 7047A-T (X9DAI, Intel E5-2603)

**SPECfp\_base2006 = 45.3**

**CPU2006 license:** 001176

**Test date:** Apr-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2012

**Tested by:** Supermicro

**Software Availability:** Dec-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

**SPECfp2006 = 47.2**

SuperWorkstation 7047A-T (X9DAI, Intel E5-2603)

**SPECfp\_base2006 = 45.3**

CPU2006 license: 001176

Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel
```

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 47.2

SuperWorkstation 7047A-T (X9DAI, Intel E5-2603)

SPECfp\_base2006 = 45.3

CPU2006 license: 001176

Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 47.2

SuperWorkstation 7047A-T (X9DAI, Intel E5-2603)

SPECfp\_base2006 = 45.3

CPU2006 license: 001176

Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:17:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 May 2012.