



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-D70RF (X9DRT-HF, Intel Xeon E5-2667, 3.5GHz)

SPECint®\_rate2006 = 517

SPECint\_rate\_base2006 = 496

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

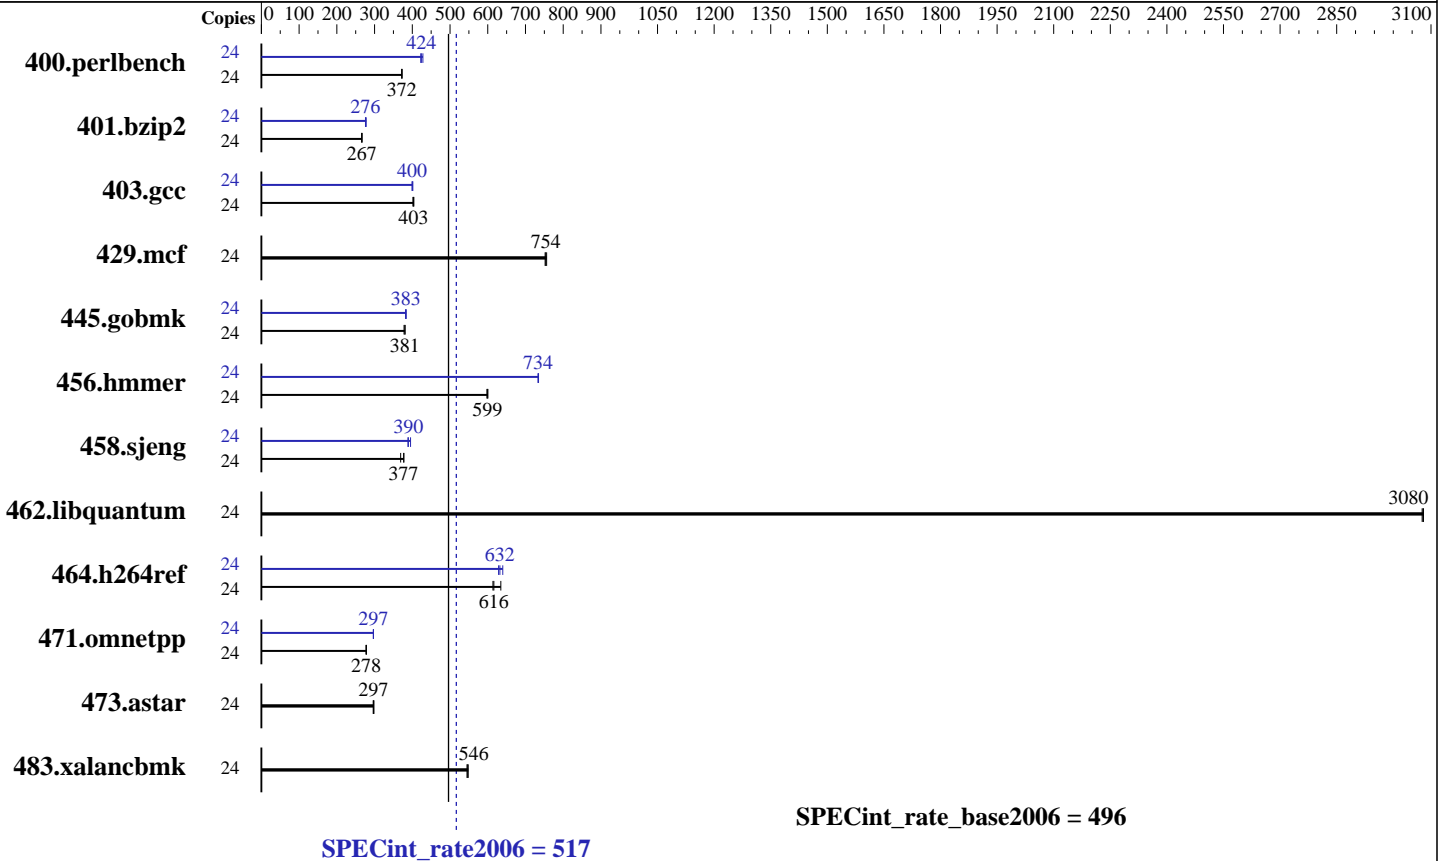

**Hardware**

CPU Name: Intel Xeon E5-2667  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM  
 Other Hardware: None

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-D70RF (X9DRT-HF, Intel Xeon E5-2667, 3.5GHz)

SPECint\_rate2006 = 517

SPECint\_rate\_base2006 = 496

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	629	373	<b>630</b>	<b>372</b>	630	372	24	555	422	<b>553</b>	<b>424</b>	548	428
401.bzip2	24	<b>869</b>	<b>267</b>	868	267	872	266	24	<b>838</b>	<b>276</b>	839	276	834	278
403.gcc	24	478	404	<b>479</b>	<b>403</b>	481	402	24	484	400	481	401	<b>483</b>	<b>400</b>
429.mcf	24	<b>290</b>	<b>754</b>	290	756	291	752	24	<b>290</b>	<b>754</b>	290	756	291	752
445.gobmk	24	<b>662</b>	<b>381</b>	661	381	666	378	24	659	382	<b>657</b>	<b>383</b>	656	384
456.hammer	24	373	600	<b>374</b>	<b>599</b>	375	598	24	<b>305</b>	<b>734</b>	305	735	305	734
458.sjeng	24	<b>770</b>	<b>377</b>	787	369	769	378	24	735	395	747	389	<b>745</b>	<b>390</b>
462.libquantum	24	161	3080	<b>162</b>	<b>3080</b>	162	3080	24	161	3080	<b>162</b>	<b>3080</b>	162	3080
464.h264ref	24	<b>862</b>	<b>616</b>	865	614	837	635	24	<b>840</b>	<b>632</b>	830	640	845	629
471.omnetpp	24	541	277	539	278	<b>539</b>	<b>278</b>	24	505	297	505	297	<b>505</b>	<b>297</b>
473.astar	24	569	296	<b>567</b>	<b>297</b>	565	298	24	569	296	<b>567</b>	<b>297</b>	565	298
483.xalancbmk	24	<b>304</b>	<b>546</b>	304	545	302	548	24	<b>304</b>	<b>546</b>	304	545	302	548

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on 131-32.inet Mon Apr 23 12:08:52 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2667 0 @ 2.90GHz  
2 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-D70RF (X9DRT-HF, Intel Xeon E5-2667, 3.5GHz)

SPECint\_rate2006 = 517

SPECint\_rate\_base2006 = 496

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

### Platform Notes (Continued)

24 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal:      65948536 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.1 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux 131-32.inet 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10 15:42:40 EDT
2011 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 23 12:02

SPEC is set to: /home/cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_13132-lv_home
                ext4      162G   64G   90G   42% /home
```

Additional information from dmidecode:

Memory:

```
8x Hynix Semiconducto HMT31GR7CFR4C 8 GB 1600 MHz 1 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 2027TR-D70RF (X9DRT-HF, Intel Xeon E5-2667, 3.5GHz)

**SPECint\_rate2006 = 517**

**SPECint\_rate\_base2006 = 496**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-D70RF (X9DRT-HF, Intel Xeon E5-2667, 3.5GHz)

SPECint\_rate2006 = 517

SPECint\_rate\_base2006 = 496

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
 -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
 -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalanbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-D70RF (X9DRT-HF, Intel Xeon E5-2667, 3.5GHz)

SPECint\_rate2006 = 517

SPECint\_rate\_base2006 = 496

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 04:28:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 June 2012.