



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp®\_rate2006 = 494

Cisco UCS B200 M3 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp\_rate\_base2006 = 480

CPU2006 license: 9019


Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

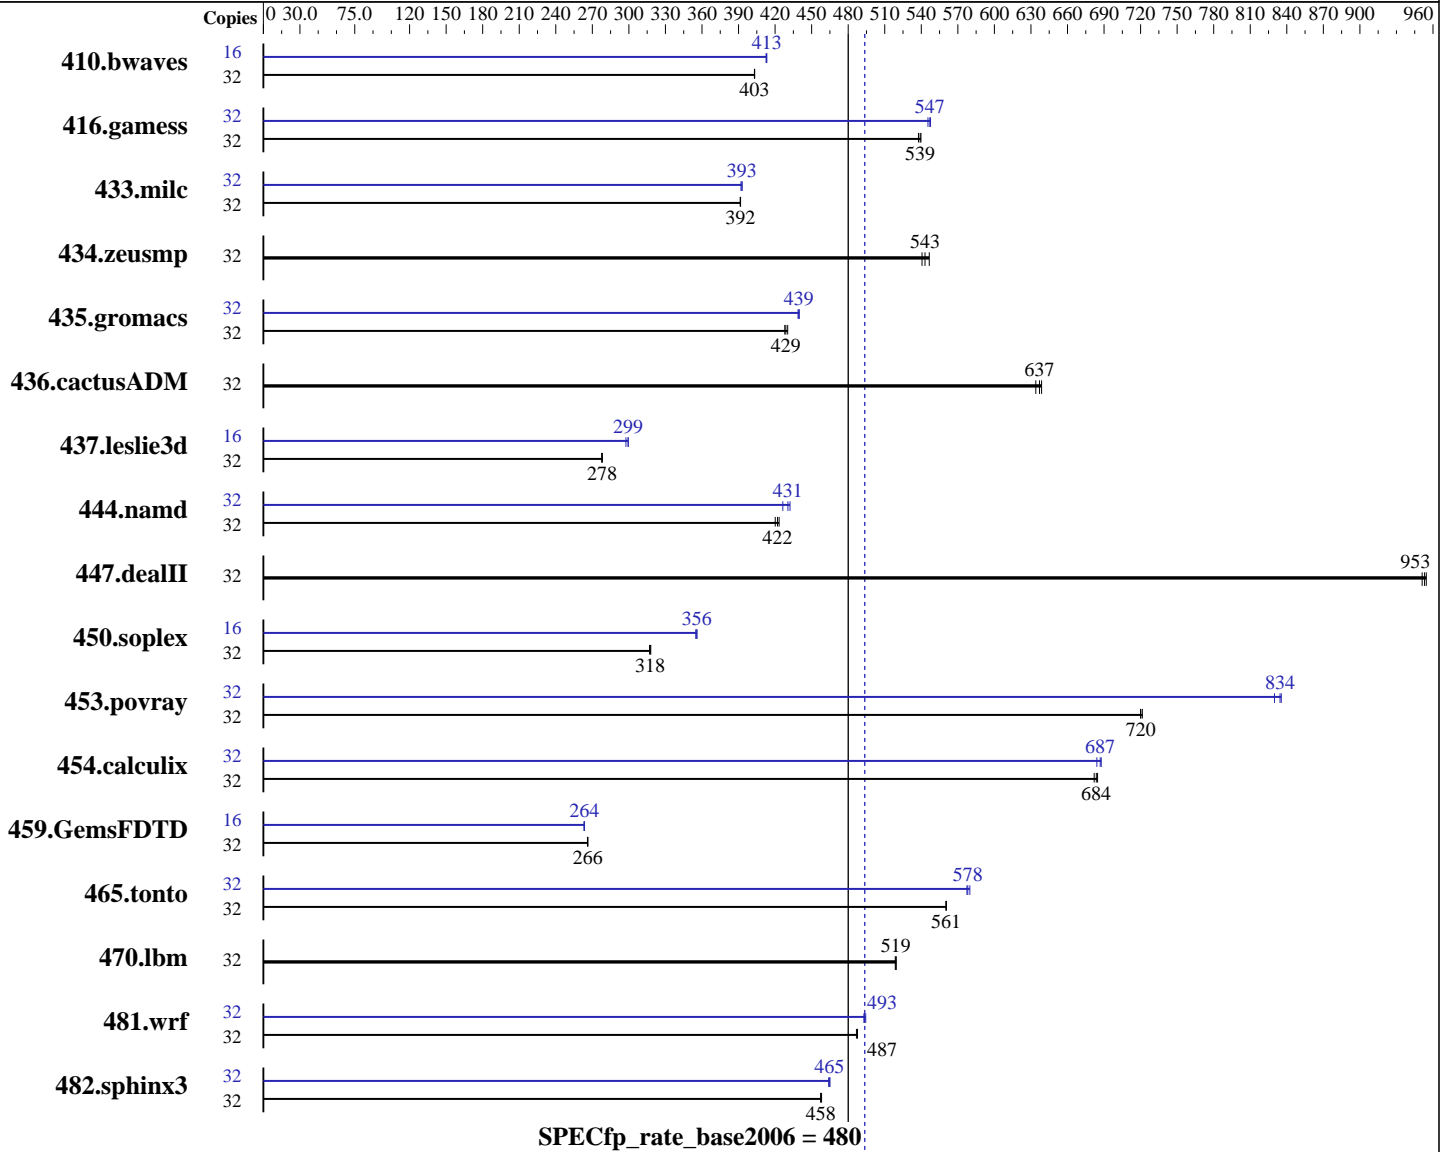

### Hardware

CPU Name: Intel Xeon E5-2680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS B200 M3 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp\_rate\_base2006 = 480

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 X 300 GB 10000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1079	403	<b>1079</b>	<b>403</b>	1079	403	16	527	413	<b>526</b>	<b>413</b>	526	413
416.gamess	32	<b>1162</b>	<b>539</b>	1161	540	1165	538	32	<b>1145</b>	<b>547</b>	1149	545	1144	548
433.milc	32	750	392	751	391	<b>750</b>	<b>392</b>	32	749	392	748	393	<b>748</b>	<b>393</b>
434.zeusmp	32	533	547	539	541	<b>536</b>	<b>543</b>	32	533	547	539	541	<b>536</b>	<b>543</b>
435.gromacs	32	<b>533</b>	<b>429</b>	534	428	531	430	32	521	439	<b>520</b>	<b>439</b>	519	440
436.cactusADM	32	599	639	<b>600</b>	<b>637</b>	603	634	32	599	639	<b>600</b>	<b>637</b>	603	634
437.leslie3d	32	1081	278	<b>1082</b>	<b>278</b>	1083	278	16	505	298	<b>502</b>	<b>299</b>	502	299
444.namd	32	611	420	606	423	<b>608</b>	<b>422</b>	32	602	426	594	432	<b>596</b>	<b>431</b>
447.dealII	32	<b>384</b>	<b>953</b>	384	954	385	951	32	<b>384</b>	<b>953</b>	384	954	385	951
450.soplex	32	839	318	842	317	<b>841</b>	<b>318</b>	16	375	356	376	355	<b>375</b>	<b>356</b>
453.povray	32	236	720	236	721	<b>236</b>	<b>720</b>	32	205	830	204	835	<b>204</b>	<b>834</b>
454.calculix	32	387	682	<b>386</b>	<b>684</b>	386	685	32	384	688	386	684	<b>384</b>	<b>687</b>
459.GemsFDTD	32	<b>1275</b>	<b>266</b>	1276	266	1275	266	16	<b>644</b>	<b>264</b>	644	264	645	263
465.tonto	32	562	561	562	560	<b>562</b>	<b>561</b>	32	<b>545</b>	<b>578</b>	545	577	543	580
470.lbm	32	847	519	848	519	<b>847</b>	<b>519</b>	32	847	519	848	519	<b>847</b>	<b>519</b>
481.wrf	32	733	488	734	487	<b>733</b>	<b>487</b>	32	723	494	<b>724</b>	<b>493</b>	725	493
482.sphinx3	32	1363	457	<b>1363</b>	<b>458</b>	1361	458	32	<b>1342</b>	<b>465</b>	1341	465	1344	464

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
Processor C6 Report set to Disabled  
Processor ClE set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS B200 M3 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp\_rate\_base2006 = 480

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Platform Notes (Continued)

```

CPU Performance set to HPC
LV DDR Mode set to Performance-mode
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Sat Apr 28 19:20:01 2012

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Genuine Intel(R) CPU @ 2.70GHz
 2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      132099952 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 28 15:09

```

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4      275G  8.0G  253G   4% /

```

```

Additional information from dmidecode:
Memory:
16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank

```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS B200 M3 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp\_rate\_base2006 = 480

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Intel HT Technology = enable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS B200 M3 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp\_rate\_base2006 = 480

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS B200 M3 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp\_rate\_base2006 = 480

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static  
 -unroll2

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
 -opt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 494

Cisco UCS B200 M3 (Intel Xeon E5-2680, 2.70 GHz)

SPECfp\_rate\_base2006 = 480

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:58:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 May 2012.