



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2630, 2.30 GHz)

SPECfp®2006 = 72.8

SPECfp_base2006 = 69.9

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

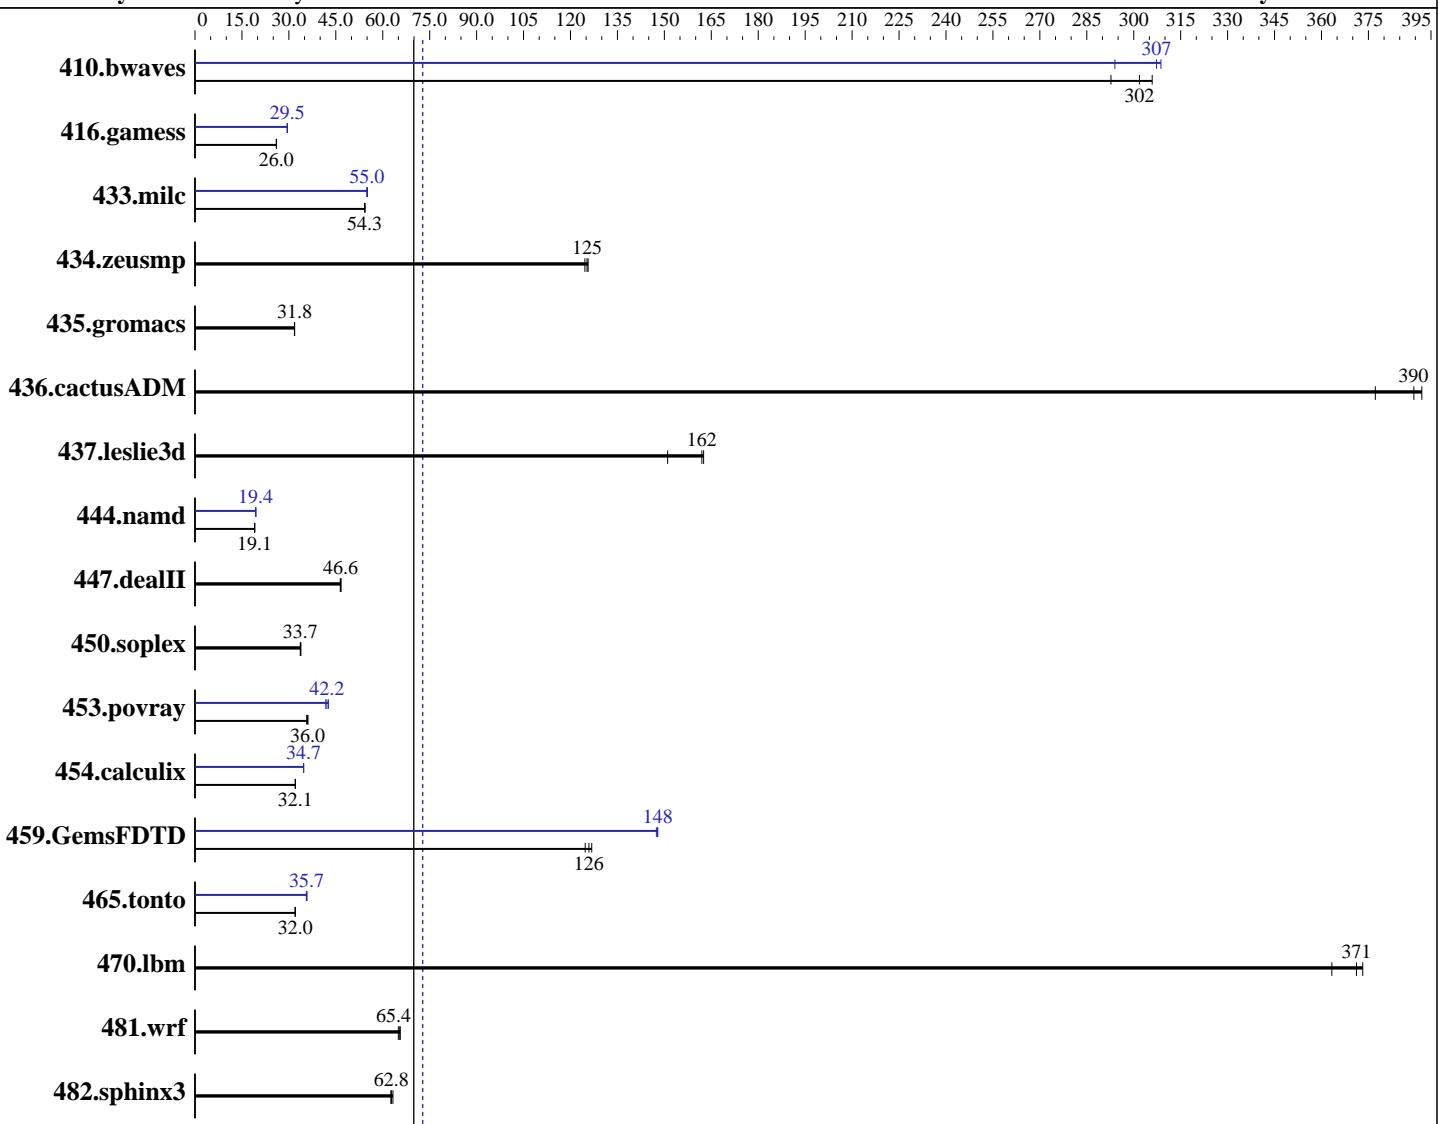

SPECfp_base2006 = 69.9

SPECfp2006 = 72.8

Hardware

CPU Name: Intel Xeon E5-2630
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Compiler: 2.6.32-220.el6.x86_64
 Auto Parallel: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
 Software: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2630, 2.30 GHz)

SPECfp2006 = 72.8

SPECfp_base2006 = 69.9

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL7)
 Disk Subsystem: 1 X 73 GB 10000 RPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	45.0	302	44.4	306	46.4	293	44.0	309	44.2	307	46.2	294
416.gamess	751	26.1	752	26.0	754	26.0	663	29.5	664	29.5	665	29.5
433.milc	169	54.3	169	54.2	169	54.3	167	55.1	167	55.0	167	54.9
434.zeusmp	72.4	126	72.6	125	73.0	125	72.4	126	72.6	125	73.0	125
435.gromacs	224	31.9	225	31.8	225	31.8	224	31.9	225	31.8	225	31.8
436.cactusADM	30.5	392	31.7	377	30.7	390	30.5	392	31.7	377	30.7	390
437.leslie3d	62.2	151	57.8	163	58.0	162	62.2	151	57.8	163	58.0	162
444.namd	421	19.1	421	19.1	420	19.1	413	19.4	413	19.4	413	19.4
447.dealII	246	46.4	245	46.6	245	46.6	246	46.4	245	46.6	245	46.6
450.soplex	248	33.7	246	33.9	247	33.7	248	33.7	246	33.9	247	33.7
453.povray	148	36.1	149	35.7	148	36.0	126	42.2	125	42.6	127	41.8
454.calculix	258	32.0	257	32.1	257	32.1	238	34.7	238	34.7	238	34.7
459.GemsFDTD	83.7	127	84.3	126	85.1	125	72.0	147	71.8	148	71.8	148
465.tonto	308	32.0	307	32.0	306	32.1	275	35.8	277	35.6	275	35.7
470.lbm	37.8	363	36.8	373	37.0	371	37.8	363	36.8	373	37.0	371
481.wrf	172	65.0	170	65.6	171	65.4	172	65.0	170	65.6	171	65.4
482.sphinx3	308	63.3	311	62.6	311	62.8	308	63.3	311	62.6	311	62.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Processor Power State C6 set to Disabled

Processor Power State C1 Enhanced set to Disabled

Power Technology set to Custom

Energy Performance set to Performance

DRAM Clock Throttling set to Performance

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Thu May 3 00:44:06 2012

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2630, 2.30 GHz)

SPECfp2006 = 72.8

SPECfp_base2006 = 69.9

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630 0 @ 2.30GHz
  2 "physical id"s (chips)
  12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings : 6
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132103104 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 3 00:39
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4   66G   9.9G   53G  16% /
```

Additional information from dmidecode:

```
Memory:
 16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	SPECfp2006 =	72.8
Cisco UCS C240 M3 (Intel Xeon E5-2630, 2.30 GHz)	SPECfp_base2006 =	69.9
CPU2006 license: 9019	Test date:	May-2012
Test sponsor: Cisco Systems	Hardware Availability:	Jun-2012
Tested by: Cisco Systems	Software Availability:	Dec-2011

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
OMP_NUM_THREADS = "12"
Intel HT Technology = Disable
Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	SPECfp2006 =	72.8
Cisco UCS C240 M3 (Intel Xeon E5-2630, 2.30 GHz)	SPECfp_base2006 =	69.9
CPU2006 license: 9019	Test date:	May-2012
Test sponsor: Cisco Systems	Hardware Availability:	Jun-2012
Tested by: Cisco Systems	Software Availability:	Dec-2011

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	SPECfp2006 =	72.8
Cisco UCS C240 M3 (Intel Xeon E5-2630, 2.30 GHz)	SPECfp_base2006 =	69.9
CPU2006 license: 9019	Test date:	May-2012
Test sponsor: Cisco Systems	Hardware Availability:	Jun-2012
Tested by: Cisco Systems	Software Availability:	Dec-2011

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
             -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
            -inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
               -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	SPECfp2006 =	72.8
Cisco UCS C240 M3 (Intel Xeon E5-2630, 2.30 GHz)	SPECfp_base2006 =	69.9
CPU2006 license: 9019	Test date:	May-2012
Test sponsor: Cisco Systems	Hardware Availability:	Jun-2012
Tested by: Cisco Systems	Software Availability:	Dec-2011

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:54:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 May 2012.