



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®2006 = 59.9

NovaScale R470 F3 (Intel Xeon E5-4620, 2.20 GHz)

SPECfp_base2006 = 55.9

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

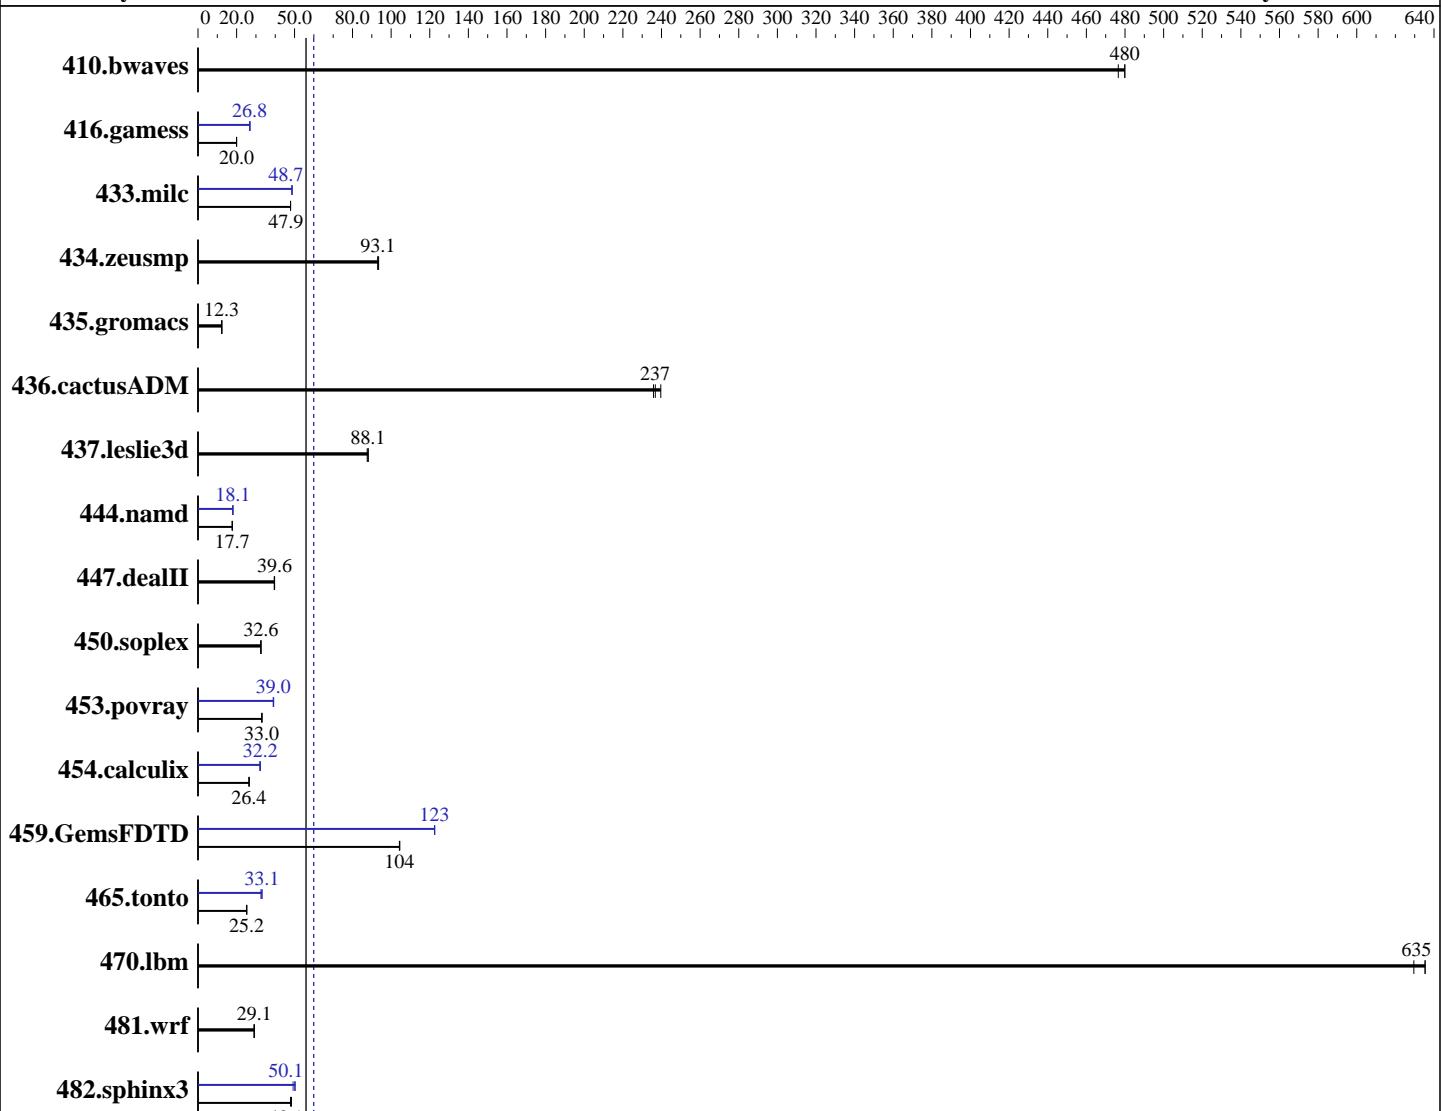

SPECfp_base2006 = 55.9

SPECfp2006 = 59.9

Hardware

CPU Name: Intel Xeon E5-4620
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64)
 3.0.13-0.27-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE
 for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran
 Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 59.9

NovaScale R470 F3 (Intel Xeon E5-4620, 2.20 GHz)

SPECfp_base2006 = 55.9

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache:	16 MB I+D on chip per chip	Base Pointers:	64-bit
Other Cache:	None	Peak Pointers:	32/64-bit
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)	Other Software:	None
Disk Subsystem:	4 x 300 GB 10000 RPM SAS, RAID 0		
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	28.3	480	28.5	477	<u>28.3</u>	<u>480</u>	28.3	480	28.5	477	<u>28.3</u>	<u>480</u>
416.gamess	<u>981</u>	<u>20.0</u>	978	20.0	982	19.9	<u>728</u>	<u>26.9</u>	<u>730</u>	<u>26.8</u>	730	26.8
433.milc	192	47.9	191	48.0	<u>192</u>	<u>47.9</u>	<u>189</u>	<u>48.7</u>	189	48.7	189	48.7
434.zeusmp	<u>97.7</u>	<u>93.1</u>	97.3	93.5	97.7	93.1	<u>97.7</u>	<u>93.1</u>	97.3	93.5	97.7	93.1
435.gromacs	578	12.4	582	12.3	<u>580</u>	<u>12.3</u>	578	12.4	582	12.3	<u>580</u>	<u>12.3</u>
436.cactusADM	50.7	236	49.9	240	<u>50.5</u>	<u>237</u>	50.7	236	49.9	240	<u>50.5</u>	<u>237</u>
437.leslie3d	107	88.1	107	87.6	<u>107</u>	<u>88.1</u>	107	88.1	107	87.6	<u>107</u>	<u>88.1</u>
444.namd	<u>452</u>	<u>17.7</u>	452	17.8	452	17.7	444	18.1	<u>444</u>	<u>18.1</u>	444	18.1
447.dealII	<u>289</u>	<u>39.6</u>	288	39.7	290	39.5	<u>289</u>	<u>39.6</u>	288	39.7	290	39.5
450.soplex	<u>256</u>	<u>32.6</u>	256	32.5	256	32.6	<u>256</u>	<u>32.6</u>	256	32.5	256	32.6
453.povray	160	33.2	161	33.0	<u>161</u>	<u>33.0</u>	136	39.0	<u>136</u>	<u>39.0</u>	136	39.2
454.calculix	<u>312</u>	<u>26.4</u>	311	26.5	313	26.4	256	32.2	<u>256</u>	<u>32.2</u>	257	32.0
459.GemsFDTD	102	105	<u>102</u>	<u>104</u>	102	104	86.6	123	86.6	123	<u>86.6</u>	<u>123</u>
465.tonto	389	25.3	<u>390</u>	<u>25.2</u>	392	25.1	297	33.1	302	32.6	<u>297</u>	<u>33.1</u>
470.lbm	21.6	635	21.8	630	<u>21.6</u>	<u>635</u>	21.6	635	21.8	630	<u>21.6</u>	<u>635</u>
481.wrf	384	29.1	<u>384</u>	<u>29.1</u>	383	29.2	384	29.1	<u>384</u>	<u>29.1</u>	383	29.2
482.sphinx3	<u>405</u>	<u>48.1</u>	403	48.4	407	47.9	<u>387</u>	<u>50.3</u>	396	49.2	<u>389</u>	<u>50.1</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost set to Enabled

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3

running on icon4p Mon Mar 12 18:57:34 2012

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 59.9

NovaScale R470 F3 (Intel Xeon E5-4620, 2.20 GHz)

SPECfp_base2006 = 55.9

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4620 0 @ 2.20GHz
        4 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings   : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
    physical 2: cores 0 1 2 3 4 5 6 7
    physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 kB
```

```
From /proc/meminfo
MemTotal:      264501512 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux icon4p 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 12 10:55 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        ext3  1.1T  123G  917G  12%  /
```

Additional information from dmidecode:

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 59.9

NovaScale R470 F3 (Intel Xeon E5-4620, 2.20 GHz)

SPECfp_base2006 = 55.9

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

OMP_NUM_THREADS = "32"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

The Dell PowerEdge R820 and

the Bull NovaScale R470 F3 Models are electronically equivalent.

The results have been measured on a Dell PowerEdge R820 model.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R470 F3 (Intel Xeon E5-4620, 2.20 GHz)

SPECfp2006 = 59.9

SPECfp_base2006 = 55.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R470 F3 (Intel Xeon E5-4620, 2.20 GHz)

SPECfp2006 = 59.9

SPECfp_base2006 = 55.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 59.9

NovaScale R470 F3 (Intel Xeon E5-4620, 2.20 GHz)

SPECfp_base2006 = 55.9

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 06:19:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.