



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp[®]_rate2006 = 317

NovaScale R430 F3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 308

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

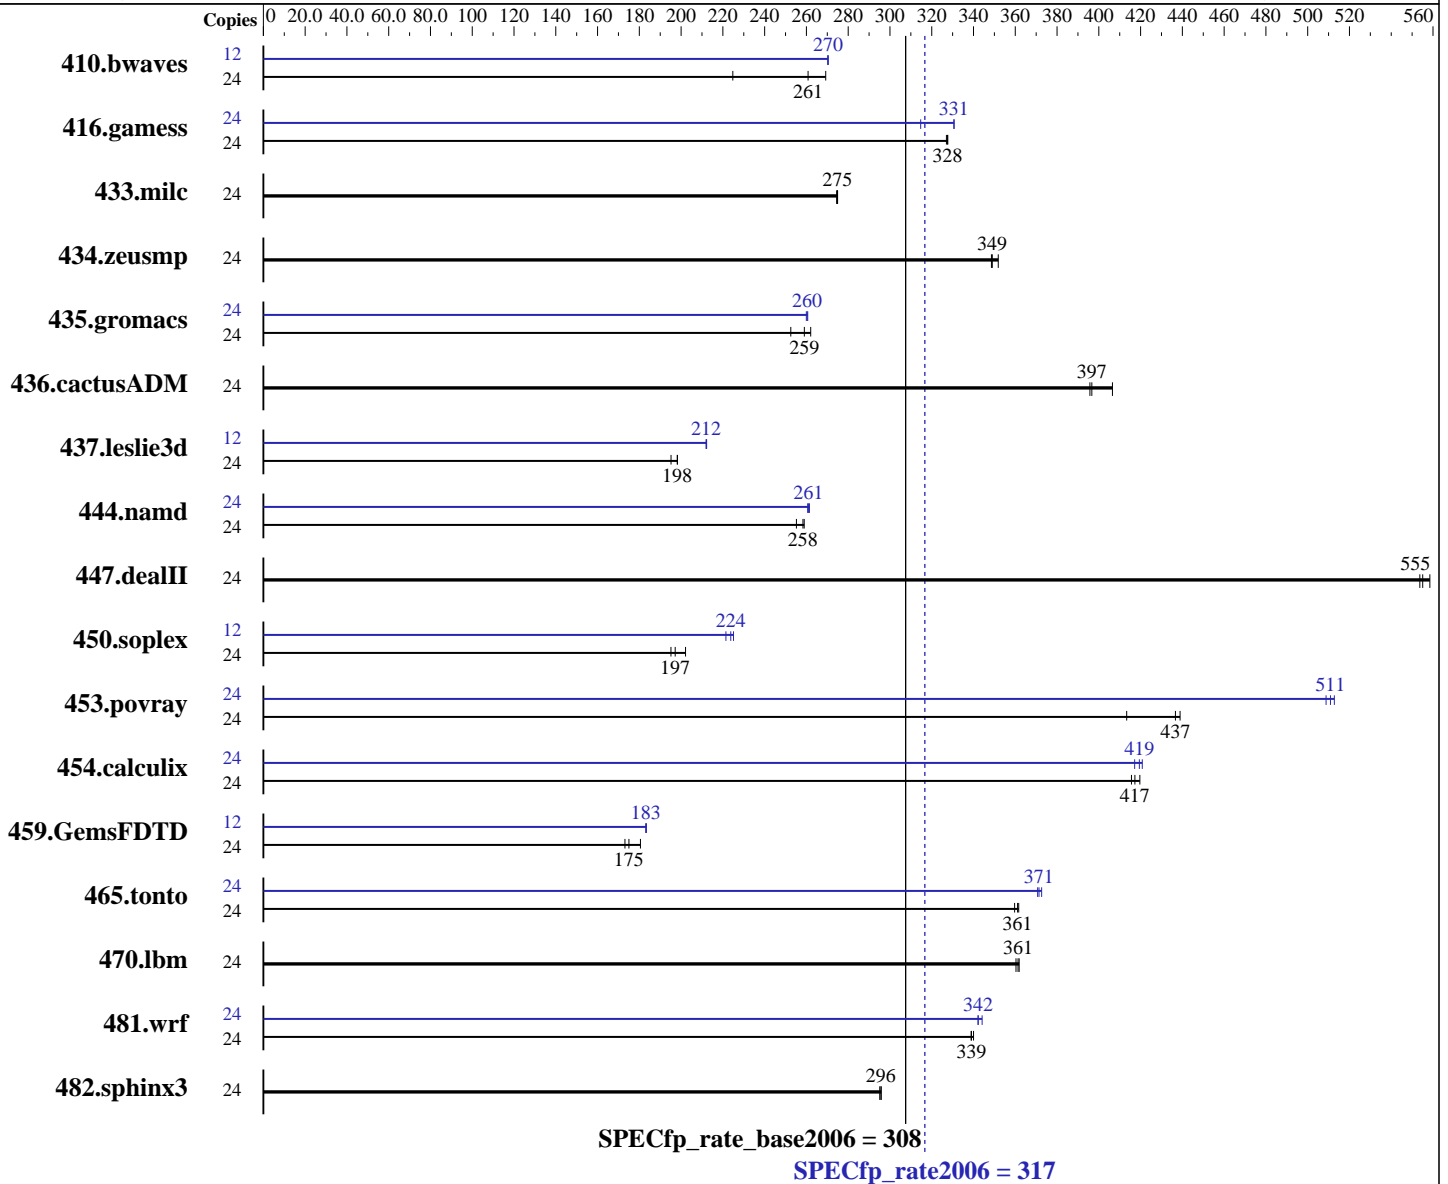

Hardware

CPU Name: Intel Xeon E5-2430
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.9-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (add definition here)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 317

NovaScale R430 F3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 308

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 2 x 600 GB 15000 RPM SAS, RAID 1
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	1211	269	<u>1251</u>	<u>261</u>	1451	225	12	<u>603</u>	<u>270</u>	603	270	603	270		
416.gamess	24	1437	327	<u>1435</u>	<u>328</u>	1434	328	24	1493	315	1421	331	<u>1422</u>	<u>331</u>		
433.milc	24	<u>802</u>	<u>275</u>	801	275	803	274	24	<u>802</u>	<u>275</u>	801	275	803	274		
434.zeusmp	24	627	349	621	352	<u>626</u>	<u>349</u>	24	627	349	621	352	<u>626</u>	<u>349</u>		
435.gromacs	24	654	262	679	253	<u>662</u>	<u>259</u>	24	659	260	658	261	<u>658</u>	<u>260</u>		
436.cactusADM	24	706	407	<u>723</u>	<u>397</u>	725	396	24	706	407	<u>723</u>	<u>397</u>	725	396		
437.leslie3d	24	<u>1139</u>	<u>198</u>	1156	195	1138	198	12	<u>532</u>	<u>212</u>	532	212	532	212		
444.namd	24	<u>745</u>	<u>258</u>	754	255	743	259	24	739	261	736	261	<u>737</u>	<u>261</u>		
447.dealII	24	492	559	<u>495</u>	<u>555</u>	496	554	24	492	559	<u>495</u>	<u>555</u>	496	554		
450.soplex	24	1026	195	<u>1015</u>	<u>197</u>	990	202	12	<u>447</u>	<u>224</u>	445	225	452	221		
453.povray	24	309	413	<u>292</u>	<u>437</u>	291	439	24	251	509	<u>250</u>	<u>511</u>	249	513		
454.calculix	24	476	416	472	420	<u>475</u>	<u>417</u>	24	<u>472</u>	<u>419</u>	475	417	471	421		
459.GemsFDTD	24	1410	181	<u>1455</u>	<u>175</u>	1471	173	12	695	183	694	183	<u>695</u>	<u>183</u>		
465.tonto	24	653	362	<u>654</u>	<u>361</u>	657	360	24	637	371	634	373	<u>636</u>	<u>371</u>		
470.lbm	24	911	362	<u>913</u>	<u>361</u>	915	360	24	911	362	<u>913</u>	<u>361</u>	915	360		
481.wrf	24	<u>791</u>	<u>339</u>	788	340	791	339	24	779	344	783	342	<u>783</u>	<u>342</u>		
482.sphinx3	24	<u>1582</u>	<u>296</u>	1581	296	1585	295	24	<u>1582</u>	<u>296</u>	1581	296	1585	295		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 317

NovaScale R430 F3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 308

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

Platform Notes (Continued)

C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3
running on slice Thu Mar 1 11:57:07 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2430 0 @ 2.20GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal: 49381468 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux slice 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 29 22:06 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext3 266G 49G 205G 20% /
```

Additional information from dmidecode:

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 317

NovaScale R430 F3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 308

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
The Dell PowerEdge R420 and the Bull NovaScale R430 F3 models are electronically equivalent.
The results have been measured on a Dell PowerEdge R420 model

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 317

NovaScale R430 F3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 308

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 317

NovaScale R430 F3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 308

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

```

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

```

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 317

NovaScale R430 F3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 308

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 05:37:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 June 2012.