



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1220L v2, 2.30 GHz

SPECfp®2006 = 55.2

SPECfp_base2006 = 53.6

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

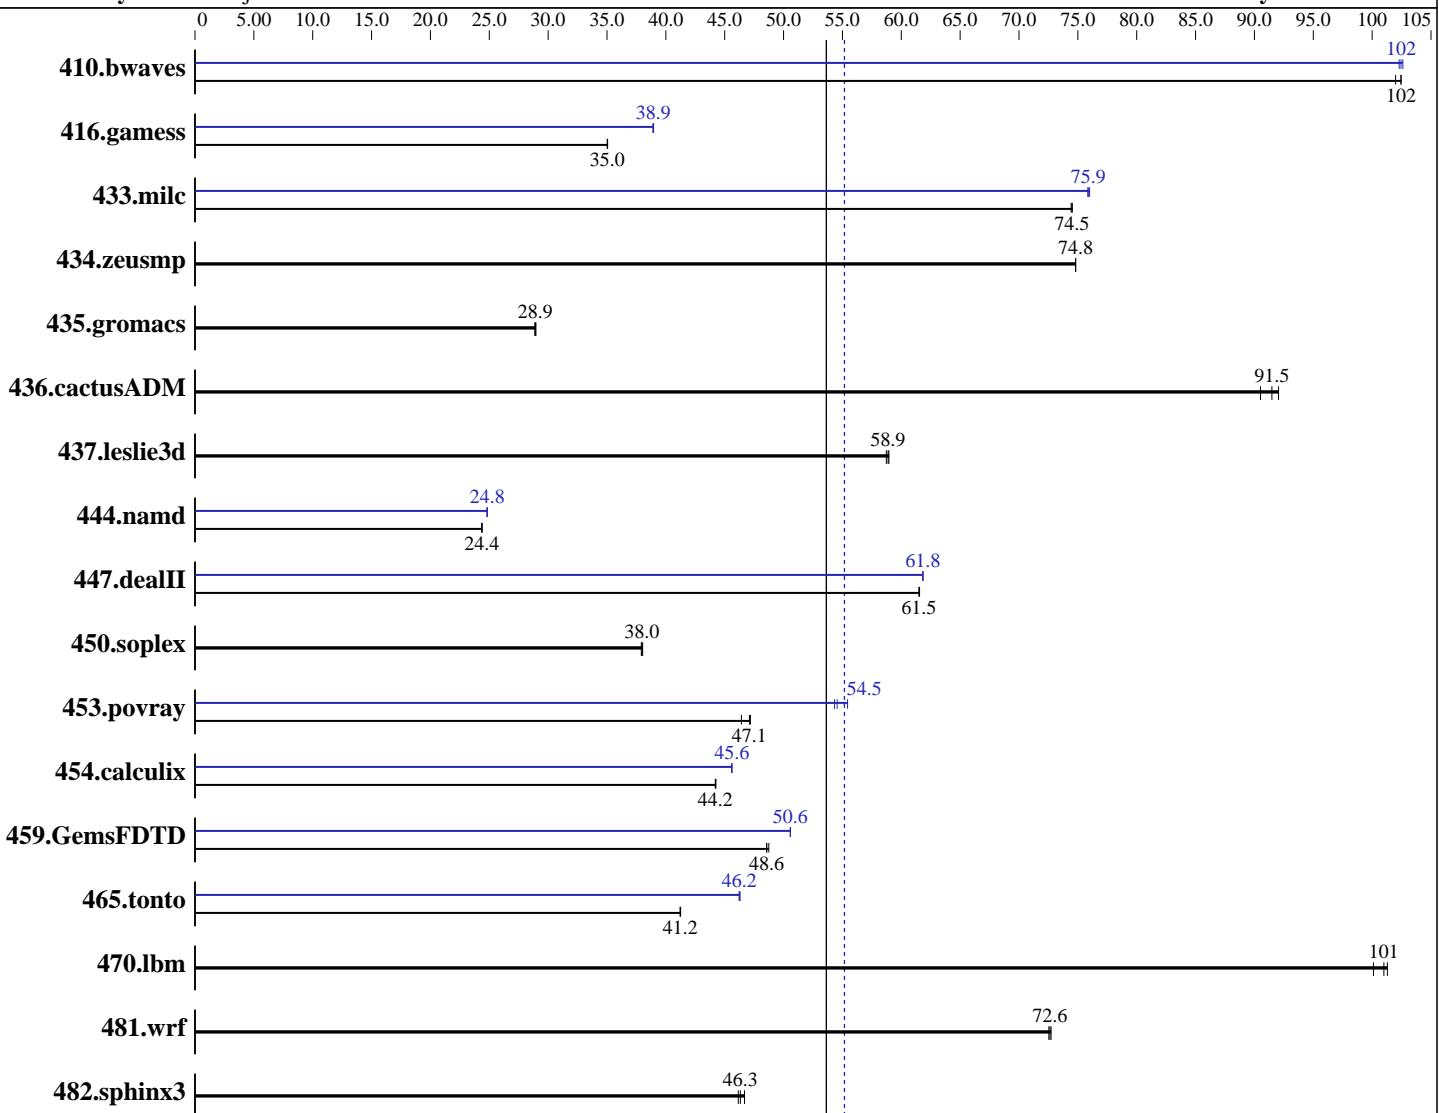

SPECfp_base2006 = 53.6

SPECfp2006 = 55.2

Hardware

CPU Name: Intel Xeon E3-1220L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.5 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Compiler: 2.6.32-220.el6.x86_64
 C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.293 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1220L v2, 2.30 GHz

SPECfp2006 = 55.2

SPECfp_base2006 = 53.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	133	102	133	102	<u>133</u>	<u>102</u>	132	103	133	102	<u>133</u>	<u>102</u>
416.gamess	559	35.0	559	35.0	559	35.1	503	38.9	503	38.9	503	39.0
433.milc	123	74.5	123	74.4	<u>123</u>	<u>74.5</u>	121	75.8	<u>121</u>	<u>75.9</u>	121	76.0
434.zeusmp	122	74.8	<u>122</u>	<u>74.8</u>	122	74.8	<u>122</u>	<u>74.8</u>	<u>122</u>	<u>74.8</u>	122	74.8
435.gromacs	247	29.0	<u>247</u>	<u>28.9</u>	247	28.9	247	29.0	<u>247</u>	<u>28.9</u>	247	28.9
436.cactusADM	<u>131</u>	<u>91.5</u>	130	92.0	132	90.5	<u>131</u>	<u>91.5</u>	130	92.0	132	90.5
437.leslie3d	159	59.0	160	58.9	160	58.7	159	59.0	160	58.9	160	58.7
444.namd	329	24.4	329	24.4	329	24.4	323	24.8	323	24.8	323	24.8
447.dealII	186	61.6	186	61.5	<u>186</u>	<u>61.5</u>	<u>185</u>	<u>61.8</u>	185	61.8	185	61.8
450.soplex	<u>220</u>	<u>38.0</u>	220	37.9	219	38.0	<u>220</u>	<u>38.0</u>	220	37.9	219	38.0
453.povray	113	47.2	<u>113</u>	<u>47.1</u>	115	46.4	<u>97.5</u>	<u>54.5</u>	97.9	54.3	96.0	55.4
454.calculix	187	44.2	<u>187</u>	<u>44.2</u>	186	44.3	181	45.6	<u>181</u>	<u>45.6</u>	181	45.6
459.GemsFDTD	<u>218</u>	<u>48.6</u>	218	48.7	218	48.6	<u>210</u>	<u>50.6</u>	210	50.6	210	50.6
465.tonto	239	41.2	<u>239</u>	<u>41.2</u>	239	41.3	<u>213</u>	<u>46.2</u>	213	46.3	<u>213</u>	<u>46.2</u>
470.lbm	<u>136</u>	<u>101</u>	136	101	137	100	<u>136</u>	<u>101</u>	136	101	137	100
481.wrf	<u>154</u>	<u>72.6</u>	154	72.5	154	72.7	<u>154</u>	<u>72.6</u>	154	72.5	154	72.7
482.sphinx3	422	46.2	417	46.7	<u>421</u>	<u>46.3</u>	<u>422</u>	<u>46.2</u>	417	46.7	<u>421</u>	<u>46.3</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Intel HT Technology = Disable

General Notes

Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,scatter"
 LD_LIBRARY_PATH = "/SPECcpu2006/lib32:/SPECcpu2006/lib64"
 OMP_NUM_THREADS = "2"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1220L v2, 2.30 GHz

SPECfp2006 = 55.2

SPECfp_base2006 = 53.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

General Notes (Continued)

Binaries compiled on a system with 1x E3-1270V2 CPU + 32 GB memory using RHEL6.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1220L v2, 2.30 GHz

SPECfp2006 = 55.2

SPECfp_base2006 = 53.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1220L v2, 2.30 GHz

SPECfp2006 = 55.2

SPECfp_base2006 = 53.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

447.deallII: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-ansi-alias

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX100 S7p, Intel Xeon E3-1220L v2, 2.30 GHz

SPECfp2006 = 55.2

SPECfp_base2006 = 53.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 06:08:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.