



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECint®2006 = 60.0**

### Huawei RH2288 V2 (Intel Xeon E5-2690)

**SPECint\_base2006 = 55.6**

CPU2006 license: 3175


Test date: May-2012

Test sponsor: Huawei

Hardware Availability: Mar-2012

Tested by: Huawei

Software Availability: Dec-2011

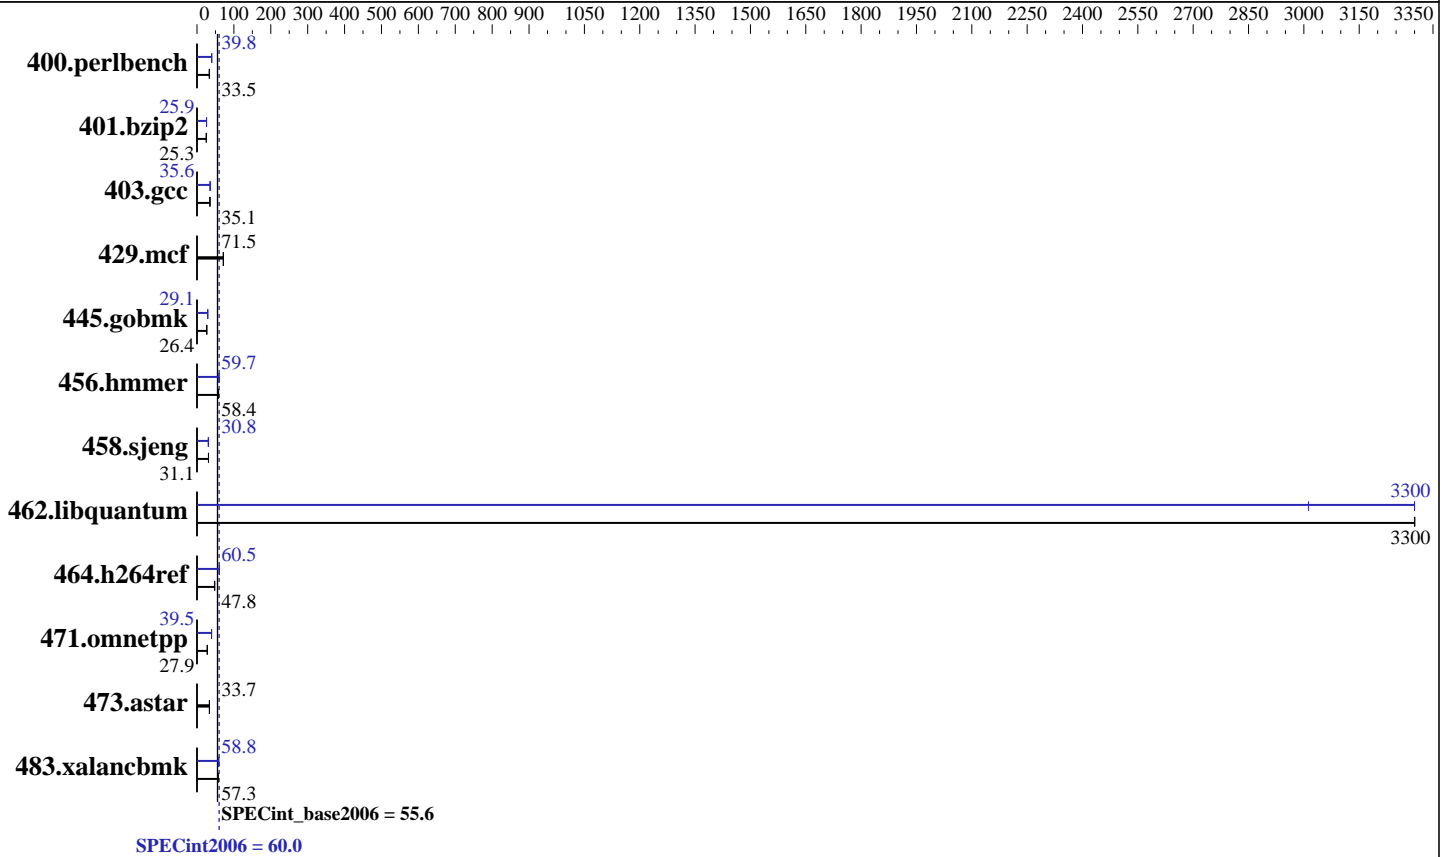

### Hardware

CPU Name: Intel Xeon E5-2690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 60.0

Huawei RH2288 V2 (Intel Xeon E5-2690)

SPECint\_base2006 = 55.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	292	33.5	<u>292</u>	<u>33.5</u>	291	33.5	<u>246</u>	<u>39.8</u>	245	39.8	246	39.8
401.bzip2	381	25.3	<u>381</u>	<u>25.3</u>	382	25.3	<u>373</u>	<u>25.9</u>	374	25.8	373	25.9
403.gcc	229	35.1	<u>229</u>	<u>35.1</u>	230	35.0	<u>226</u>	<u>35.6</u>	226	35.6	226	35.6
429.mcf	<u>127</u>	<u>71.5</u>	128	71.3	127	71.5	<u>127</u>	<u>71.5</u>	128	71.3	127	71.5
445.gobmk	397	26.4	<u>398</u>	<u>26.4</u>	398	26.4	361	29.1	361	29.1	<u>361</u>	<u>29.1</u>
456.hmmr	<u>160</u>	<u>58.4</u>	160	58.4	160	58.4	<u>156</u>	<u>59.7</u>	156	59.7	156	59.7
458.sjeng	<u>389</u>	<u>31.1</u>	389	31.1	389	31.1	<u>393</u>	<u>30.8</u>	392	30.8	393	30.8
462.libquantum	<u>6.28</u>	<u>3300</u>	6.28	3300	6.28	3300	<u>6.28</u>	<u>3300</u>	6.28	3300	6.88	3010
464.h264ref	462	47.9	464	47.7	<u>463</u>	<u>47.8</u>	367	60.2	<u>366</u>	<u>60.5</u>	366	60.5
471.omnetpp	224	27.9	224	27.9	<u>224</u>	<u>27.9</u>	158	39.6	159	39.3	<u>158</u>	<u>39.5</u>
473.astar	209	33.6	<u>208</u>	<u>33.7</u>	207	33.8	209	33.6	<u>208</u>	<u>33.7</u>	207	33.8
483.xalancbmk	124	55.9	<u>120</u>	<u>57.3</u>	120	57.4	117	58.8	117	58.9	<u>117</u>	<u>58.8</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:

Intel Hyper-Threading set to Disabled

Set Power Efficiency Mode to Performance

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on RH2288-rebuild Wed May 23 11:31:03 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
```

```
2 "physical id"s (chips)
```

```
16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
```

```
siblings : 8
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 60.0

Huawei RH2288 V2 (Intel Xeon E5-2690)

SPECint\_base2006 = 55.6

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2012  
Hardware Availability: Mar-2012  
Software Availability: Dec-2011

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132124016 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux RH2288-rebuild 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 23 11:21
```

```
SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      289G   31G  244G  12% /
```

```
Additional information from dmidecode:
Memory:
16x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

## General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "16"
```

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
```

## Base Compiler Invocation

```
C benchmarks:
icc -m64
```

```
C++ benchmarks:
icpc -m64
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECint2006 = 60.0**

**Huawei RH2288 V2 (Intel Xeon E5-2690)**

**SPECint\_base2006 = 55.6**

**CPU2006 license:** 3175

**Test date:** May-2012

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/smartheap -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`445.gobmk: icc -m32`

`464.h264ref: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

`473.astar: icpc -m64`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 60.0

Huawei RH2288 V2 (Intel Xeon E5-2690)

SPECint\_base2006 = 55.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
                -auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 60.0

Huawei RH2288 V2 (Intel Xeon E5-2690)

SPECint\_base2006 = 55.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

471.omnetpp (continued):

`-Wl,-z,muldefs -L/smartheap -lsmartheap`

473.astar: basepeak = yes

483.xalancbmk: `-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

`-Wl,-z,muldefs -L/smartheap -lsmartheap`

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:03:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 June 2012.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 6