



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®_rate2006 = 209

Express5800/A1020a (Intel Xeon E5-2609)

SPECfp_rate_base2006 = 204

CPU2006 license: 9006


Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

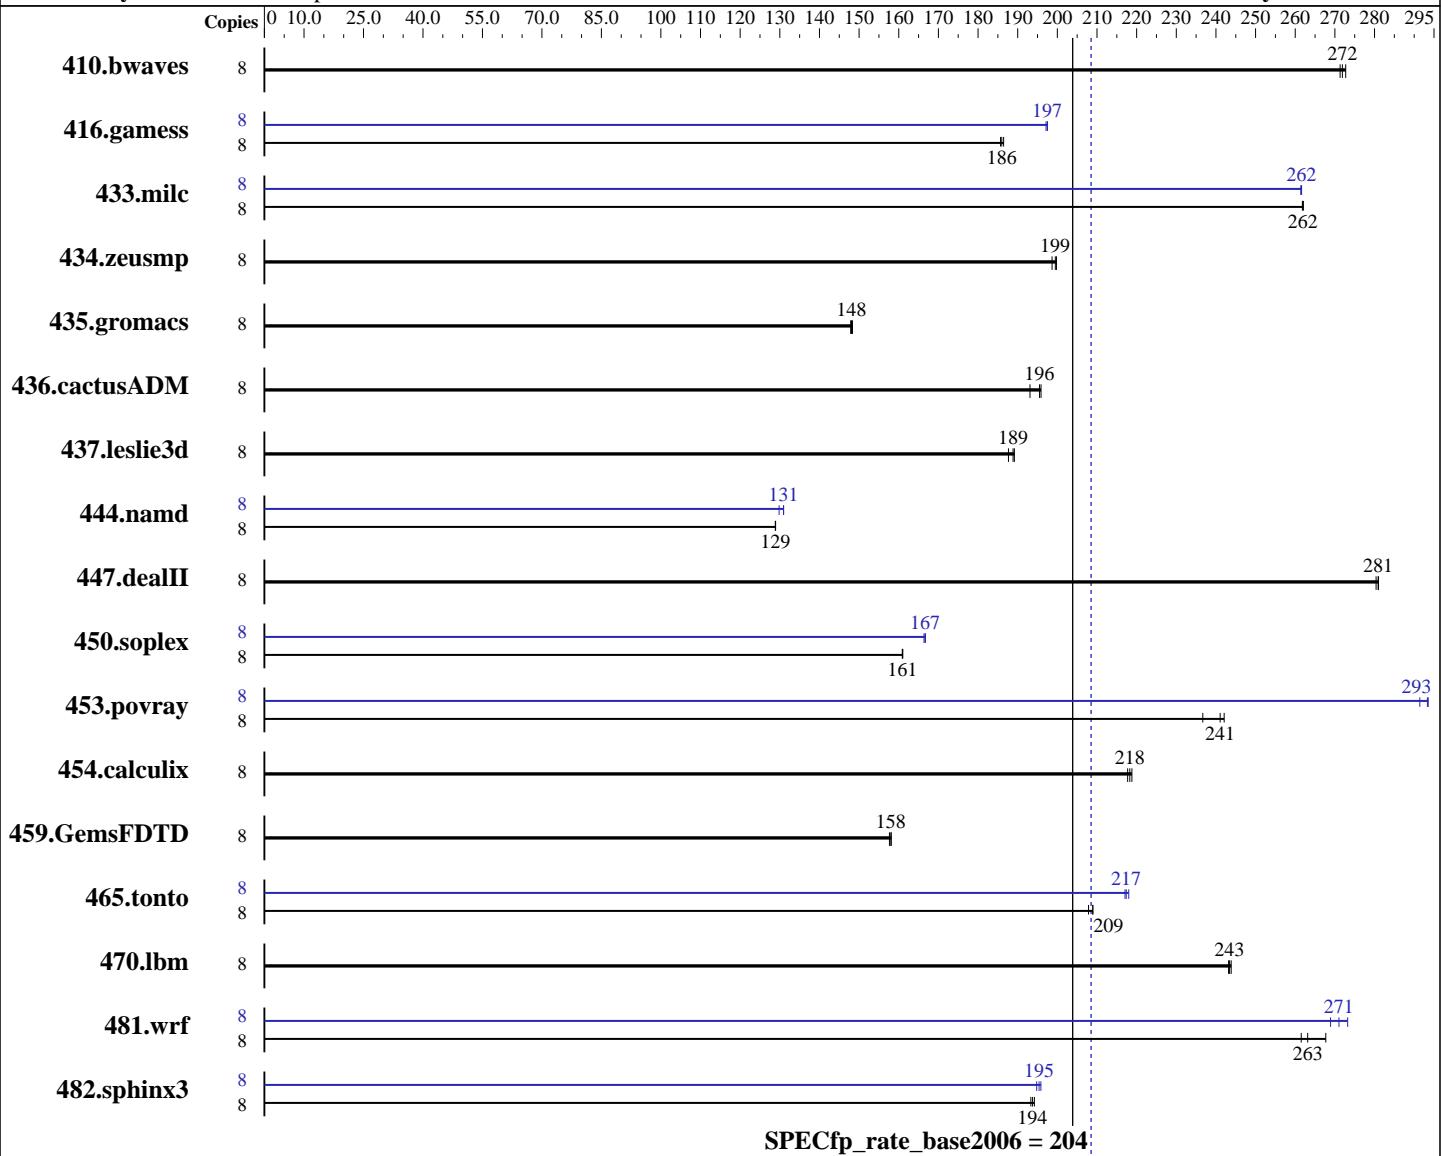

SPECfp_rate2006 = 209

Hardware

CPU Name: Intel Xeon E5-2609
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.7 (Tikanga)
 Compiler: Kernel 2.6.18-274.el5 on an x86_64
 C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 209

Express5800/A1020a (Intel Xeon E5-2609)

SPECfp_rate_base2006 = 204

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 1 x 300 GB SAS, 15000 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	399	273	400	272	401	271	8	399	273	400	272	401	271		
416.gamess	8	840	186	844	186	842	186	8	793	197	794	197	793	198		
433.milc	8	280	262	281	262	280	262	8	281	261	281	262	281	262		
434.zeusmp	8	364	200	366	199	365	199	8	364	200	366	199	365	199		
435.gromacs	8	386	148	386	148	385	148	8	386	148	386	148	385	148		
436.cactusADM	8	495	193	488	196	489	196	8	495	193	488	196	489	196		
437.leslie3d	8	398	189	398	189	401	188	8	398	189	398	189	401	188		
444.namd	8	498	129	498	129	498	129	8	494	130	490	131	490	131		
447.dealII	8	326	281	326	280	326	281	8	326	281	326	280	326	281		
450.soplex	8	414	161	414	161	415	161	8	400	167	401	166	400	167		
453.povray	8	176	242	177	241	180	237	8	145	293	146	291	145	294		
454.calculix	8	303	218	302	219	302	218	8	303	218	302	219	302	218		
459.GemsFDTD	8	538	158	537	158	537	158	8	538	158	537	158	537	158		
465.tonto	8	379	208	377	209	377	209	8	361	218	362	217	363	217		
470.lbm	8	451	244	452	243	452	243	8	451	244	452	243	452	243		
481.wrf	8	334	268	342	262	340	263	8	332	269	327	273	330	271		
482.sphinx3	8	807	193	805	194	803	194	8	800	195	798	195	796	196		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1020a (Intel Xeon E5-2609)

SPECfp_rate2006 = 209

SPECfp_rate_base2006 = 204

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Platform Notes

BIOS Settings:

Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

```
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 39600 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1020a (Intel Xeon E5-2609)

SPECfp_rate2006 = 209

SPECfp_rate_base2006 = 204

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Base Portability Flags (Continued)

```
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1020a (Intel Xeon E5-2609)

SPECfp_rate2006 = 209

SPECfp_rate_base2006 = 204

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -static -auto-ilp32

```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
              -unroll2
```

C++ benchmarks:

```

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32

```

```
447.dealII: basepeak = yes
```

```

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
             -prof-use(pass 2) -opt-malloc-options=3
             -B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT

```

```

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
             -prof-use(pass 2) -unroll4 -ansi-alias
             -B /usr/share/libhugetlbfsl -Wl,-melf_x86_64 -Wl,-hugetlbfsl-link=BDT

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1020a (Intel Xeon E5-2609)

SPECfp_rate2006 = 209

SPECfp_rate_base2006 = 204

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:34:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 July 2012.