



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

**SPECint®2006 = 38.5**

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

**SPECint\_base2006 = 36.0**

CPU2006 license: 6


Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

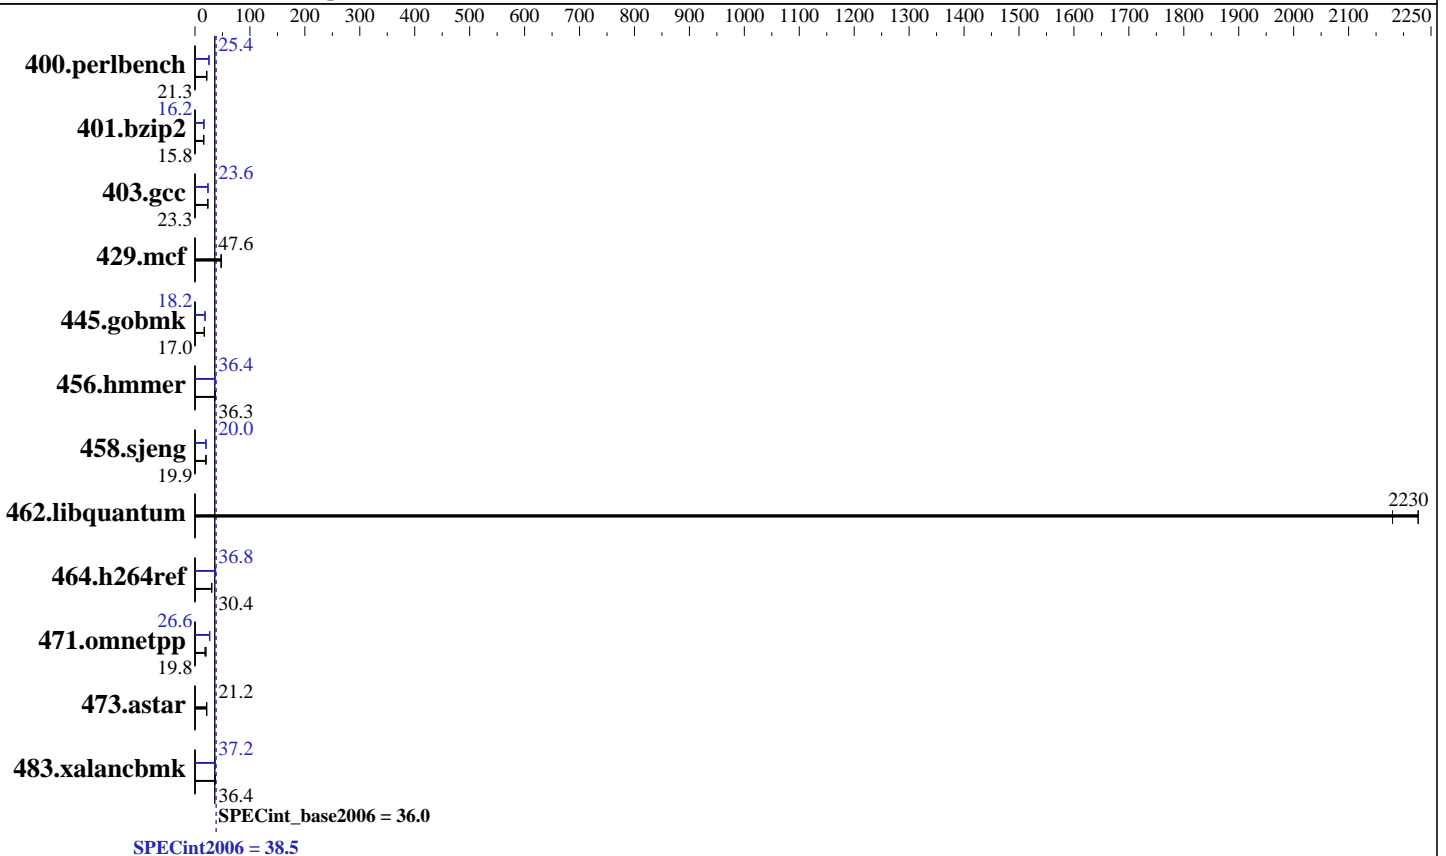

### Hardware

CPU Name: Intel Xeon E5-2658  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 or 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB 10K RPM SAS  
 Other Hardware: None

### Software

Operating System: Oracle Linux Server release 6.1  
 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 38.5

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECint\_base2006 = 36.0

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>458</b>	<b>21.3</b>	458	21.3	459	21.3	<b>384</b>	<b>25.4</b>	384	25.4	385	25.4
401.bzip2	<b>609</b>	<b>15.8</b>	609	15.9	609	15.8	596	16.2	<b>596</b>	<b>16.2</b>	596	16.2
403.gcc	345	23.3	345	23.3	<b>345</b>	<b>23.3</b>	<b>341</b>	<b>23.6</b>	341	23.6	342	23.6
429.mcf	192	47.5	<b>192</b>	<b>47.6</b>	190	47.9	192	47.5	<b>192</b>	<b>47.6</b>	190	47.9
445.gobmk	618	17.0	<b>618</b>	<b>17.0</b>	619	17.0	<b>575</b>	<b>18.2</b>	575	18.3	575	18.2
456.hammer	<b>257</b>	<b>36.3</b>	259	36.1	257	36.3	258	36.2	<b>257</b>	<b>36.4</b>	256	36.4
458.sjeng	<b>607</b>	<b>19.9</b>	607	19.9	608	19.9	604	20.0	605	20.0	<b>605</b>	<b>20.0</b>
462.libquantum	<b>9.31</b>	<b>2230</b>	9.50	2180	9.30	2230	<b>9.31</b>	<b>2230</b>	9.50	2180	9.30	2230
464.h264ref	<b>729</b>	<b>30.4</b>	729	30.4	728	30.4	<b>601</b>	<b>36.8</b>	602	36.8	589	37.6
471.omnetpp	314	19.9	<b>315</b>	<b>19.8</b>	346	18.0	235	26.6	232	26.9	<b>235</b>	<b>26.6</b>
473.astar	331	21.2	330	21.3	<b>331</b>	<b>21.2</b>	331	21.2	330	21.3	<b>331</b>	<b>21.2</b>
483.xalancbmk	<b>190</b>	<b>36.4</b>	191	36.1	188	36.7	186	37.1	<b>186</b>	<b>37.2</b>	185	37.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Default BIOS Settings were used.

Oracle's Netra Server X3-2 was formerly known as the Sun Netra X4270 M3

Sysinfo program /data1/cpu2006v1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on pae-sb-02 Tue Mar 27 09:53:52 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2658 0 @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 38.5

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECint\_base2006 = 36.0

CPU2006 license: 6  
Test sponsor: Oracle Corporation  
Tested by: Oracle Corporation

Test date: Mar-2012  
Hardware Availability: Apr-2012  
Software Availability: Oct-2011

## Platform Notes (Continued)

cache size : 20480 KB

From /proc/meminfo

MemTotal: 132288120 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Oracle Linux Server release 6.1

From /etc/\*release\* /etc/\*version\*

oracle-release: Oracle Linux Server release 6.1  
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
system-release: Oracle Linux Server release 6.1  
system-release-cpe: cpe:/o:oracle:oracle\_linux:6server:ga:server

uname -a:

Linux pae-sb-02 2.6.32-131.0.15.el6.x86\_64 #1 SMP Fri May 20 15:04:03 EDT 2011 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 5 Mar 16 16:49

SPEC is set to: /data1/cpu2006v1.2

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_paesb02-lv_root
                ext4      50G   43G   4.0G  92% /
```

Additional information from dmidecode:

Memory:

16x Samsung M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/data1/cpu2006v1.2/libs/32:/data1/cpu2006v1.2/libs/64"  
OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 38.5

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECint\_base2006 = 36.0

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs  
-L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 38.5

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECint\_base2006 = 36.0

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

## Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch  
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint2006 = 38.5

Netra Server X3-2 (Intel Xeon E5-2658 2.1GHz)

SPECint\_base2006 = 36.0

CPU2006 license: 6

Test date: Mar-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Oct-2011

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

[http://www.spec.org/cpu2006/flags/Oracle-platform-x86\\_64.CPUv1.2-RevA.html](http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

[http://www.spec.org/cpu2006/flags/Oracle-platform-x86\\_64.CPUv1.2-RevA.xml](http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:47:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 July 2012.