



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RF4+ (X9DRW-3LN4F+, Intel E5-2620)

**SPECfp®2006 = 65.2**

**SPECfp\_base2006 = 61.8**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

**Test date:** Jul-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

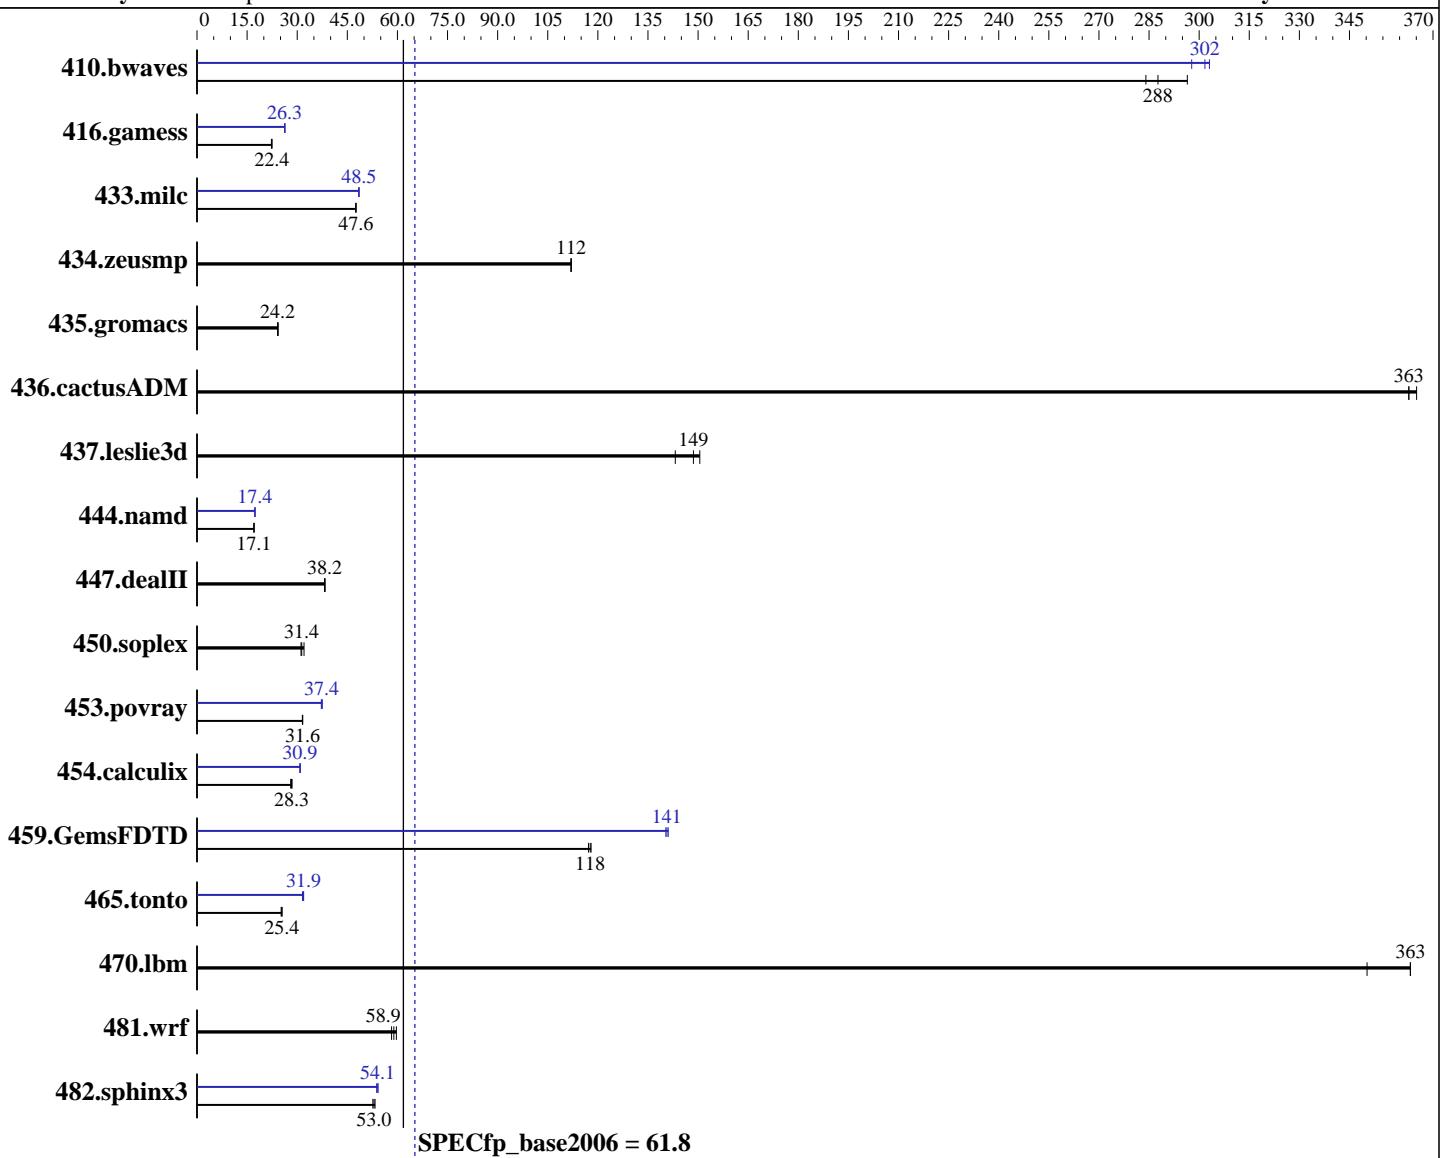

### Hardware

CPU Name: Intel Xeon E5-2620  
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86\_64  
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RF4+ (X9DRW-3LN4F+, Intel E5-2620)

**SPECfp2006 = 65.2**

**SPECfp\_base2006 = 61.8**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jul-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	47.8	284	45.8	296	<b>47.2</b>	<b>288</b>	45.6	298	44.8	303	<b>45.0</b>	<b>302</b>
416.gamess	879	22.3	873	22.4	<b>873</b>	<b>22.4</b>	744	26.3	745	26.3	<b>745</b>	<b>26.3</b>
433.milc	193	47.6	193	47.5	<b>193</b>	<b>47.6</b>	190	48.4	189	48.5	<b>189</b>	<b>48.5</b>
434.zeusmp	81.3	112	81.3	112	<b>81.3</b>	<b>112</b>	81.3	112	81.3	112	<b>81.3</b>	<b>112</b>
435.gromacs	295	24.2	294	24.3	<b>295</b>	<b>24.2</b>	295	24.2	294	24.3	<b>295</b>	<b>24.2</b>
436.cactusADM	<b>32.9</b>	<b>363</b>	32.7	365	32.9	363	<b>32.9</b>	<b>363</b>	32.7	365	32.9	363
437.leslie3d	65.7	143	<b>63.3</b>	<b>149</b>	62.5	151	65.7	143	<b>63.3</b>	<b>149</b>	62.5	151
444.namd	470	17.1	470	17.1	<b>470</b>	<b>17.1</b>	<b>462</b>	<b>17.4</b>	462	17.4	463	17.3
447.dealII	<b>299</b>	<b>38.2</b>	300	38.2	298	38.4	<b>299</b>	<b>38.2</b>	300	38.2	298	38.4
450.soplex	<b>266</b>	<b>31.4</b>	268	31.1	260	32.0	<b>266</b>	<b>31.4</b>	268	31.1	260	32.0
453.povray	169	31.5	<b>168</b>	<b>31.6</b>	168	31.6	143	37.2	<b>142</b>	<b>37.4</b>	142	37.5
454.calculix	<b>291</b>	<b>28.3</b>	294	28.0	290	28.5	267	30.9	<b>267</b>	<b>30.9</b>	268	30.8
459.GemsFDTD	90.5	117	89.9	118	<b>90.1</b>	<b>118</b>	75.6	140	<b>75.4</b>	<b>141</b>	75.2	141
465.tonto	391	25.2	<b>387</b>	<b>25.4</b>	386	25.5	<b>308</b>	<b>31.9</b>	312	31.6	308	31.9
470.lbm	<b>37.8</b>	<b>363</b>	37.8	363	39.2	350	<b>37.8</b>	<b>363</b>	37.8	363	39.2	350
481.wrf	192	58.2	<b>190</b>	<b>58.9</b>	187	59.7	192	58.2	<b>190</b>	<b>58.9</b>	187	59.7
482.sphinx3	<b>368</b>	<b>53.0</b>	366	53.3	370	52.6	<b>360</b>	<b>54.1</b>	362	53.8	360	54.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RF4+ (X9DRW-3LN4F+, Intel E5-2620)

**SPECfp2006 = 65.2**

**SPECfp\_base2006 = 61.8**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jul-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:

  icc -m64

C++ benchmarks:

  icpc -m64

Fortran benchmarks:

  ifort -m64

Benchmarks using both Fortran and C:

  icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
  433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
  444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
  465.tonto: -DSPEC\_CPU\_LP64  
  470.lbm: -DSPEC\_CPU\_LP64  
  481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

  -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
  -ansi-alias

C++ benchmarks:

  -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

  -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

  -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
  -ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RF4+ (X9DRW-3LN4F+, Intel E5-2620)

**SPECfp2006 = 65.2**

**SPECfp\_base2006 = 61.8**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jul-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6027R-N3RF4+ (X9DRW-3LN4F+, Intel E5-2620)

**SPECfp2006 = 65.2**

**SPECfp\_base2006 = 61.8**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jul-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 12:43:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 August 2012.