



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Itautec**

**SPECint®\_rate2006 = 386**

Servidor Itautec MX225+ (Intel Xeon E5-2620)

**SPECint\_rate\_base2006 = 375**

CPU2006 license: 9001


**Test date:** Jul-2012

**Test sponsor:** Itautec

**Hardware Availability:** Jun-2012

**Tested by:** Itautec

**Software Availability:** Dec-2011

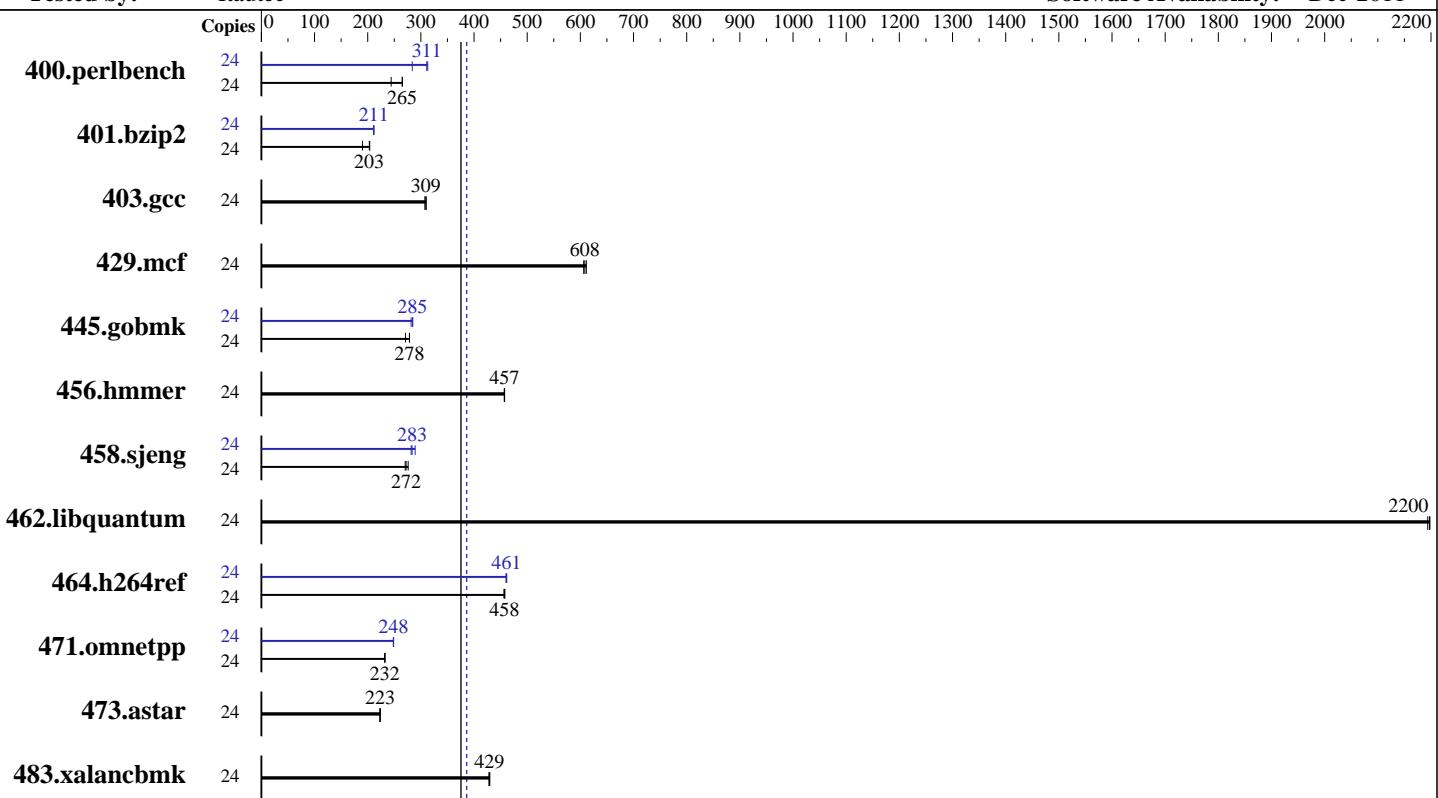

**SPECint\_rate\_base2006 = 375**

**SPECint\_rate2006 = 386**

## Hardware

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 500 GB, SATA-2, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server Release 6.2, 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

**SPECint\_rate2006 = 386**

Servidor Itautec MX225+ (Intel Xeon E5-2620)

**SPECint\_rate\_base2006 = 375**

CPU2006 license: 9001

Test date: Jul-2012

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>885</b>	<b>265</b>	884	265	961	244	24	826	284	749	313	<b>754</b>	<b>311</b>
401.bzip2	24	<b>1141</b>	<b>203</b>	1136	204	1218	190	24	<b>1096</b>	<b>211</b>	1099	211	1094	212
403.gcc	24	628	307	623	310	<b>625</b>	<b>309</b>	24	628	307	623	310	<b>625</b>	<b>309</b>
429.mcf	24	358	611	361	606	<b>360</b>	<b>608</b>	24	358	611	361	606	<b>360</b>	<b>608</b>
445.gobmk	24	<b>904</b>	<b>278</b>	929	271	904	279	24	894	282	885	285	<b>885</b>	<b>285</b>
456.hmmer	24	490	457	<b>490</b>	<b>457</b>	489	458	24	490	457	<b>490</b>	<b>457</b>	489	458
458.sjeng	24	<b>1067</b>	<b>272</b>	1052	276	1074	270	24	1004	289	1031	282	<b>1024</b>	<b>283</b>
462.libquantum	24	<b>226</b>	<b>2200</b>	227	2190	226	2200	24	<b>226</b>	<b>2200</b>	227	2190	226	2200
464.h264ref	24	<b>1161</b>	<b>458</b>	1164	456	1160	458	24	1151	462	1154	460	<b>1153</b>	<b>461</b>
471.omnetpp	24	645	233	<b>646</b>	<b>232</b>	647	232	24	<b>604</b>	<b>248</b>	603	249	604	248
473.astar	24	<b>755</b>	<b>223</b>	756	223	754	223	24	<b>755</b>	<b>223</b>	756	223	754	223
483.xalancbmk	24	385	430	<b>386</b>	<b>429</b>	387	428	24	385	430	<b>386</b>	<b>429</b>	387	428

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

```
Sysinfo program /home/rcaaneca/cpu2006/Docs/sysinfo
$Rev: 6775 $ $Date::: 2011-08-16 #$
running on localhost Thu Jul 26 10:20:03 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
        cpu cores : 6
        siblings  : 12
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint\_rate2006 = 386

Servidor Itaute MX225+ (Intel Xeon E5-2620)

SPECint\_rate\_base2006 = 375

CPU2006 license: 9001

Test date: Jul-2012

Test sponsor: Itaute

Hardware Availability: Jun-2012

Tested by: Itaute

Software Availability: Dec-2011

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:       65918208 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 26 09:41

SPEC is set to: /home/rccaneca/cpu2006
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/mapper/vg_it5rh-lv_home
                  ext4   193G  5.5G  178G   3% /home

(End of data from sysinfo program)
```

## General Notes

This result was measured on the Servidor Itaute MX205.

The Servidor Itaute MX205, the Servidor Itaute MX225+ and the Servidor Itaute LX205 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX225+ (Intel Xeon E5-2620)

**SPECint\_rate2006 = 386**

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/home/rkaneca/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX225+ (Intel Xeon E5-2620)

**SPECint\_rate2006 = 386**

**CPU2006 license:** 9001  
**Test sponsor:** Itautec  
**Tested by:** Itautec

**Test date:** Jul-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Dec-2011

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -opt-prefetch -auto-ilp32 -ansi-alias
            -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias -auto-ilp32

456.hmmer: basepeak = yes

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll14 -auto-ilp32
            -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/home/rkaneca/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 386

Servidor Itautec MX225+ (Intel Xeon E5-2620)

SPECint\_rate\_base2006 = 375

CPU2006 license: 9001

Test date: Jul-2012

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Dec-2011

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.html](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.xml](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:56:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 August 2012.