



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B120d-h (Intel Xeon E5-2650)

**SPECint®2006 = 44.9**

**SPECint\_base2006 = 41.5**

**CPU2006 license:** 9006


**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Aug-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2012

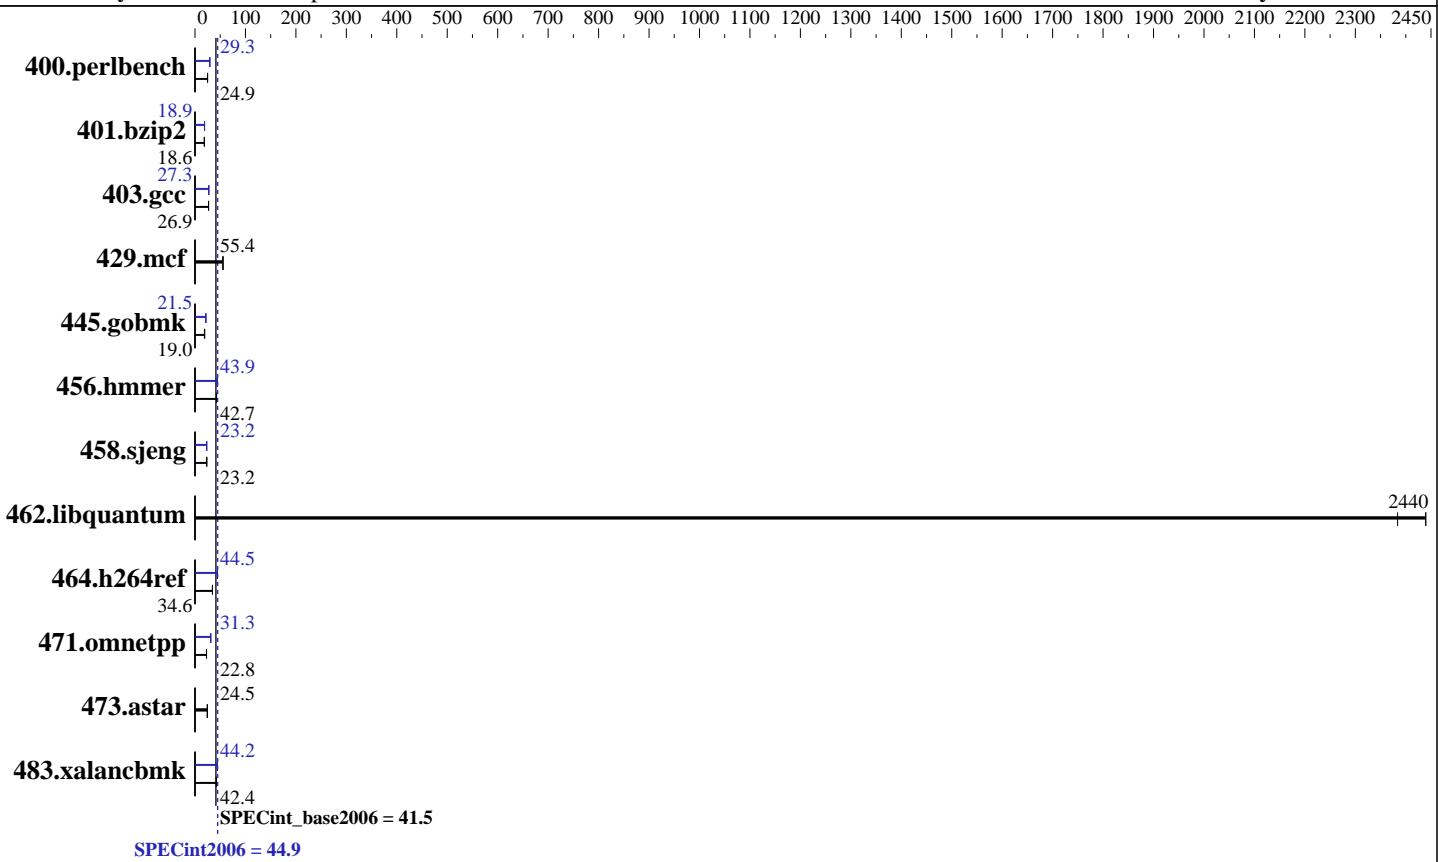

## Hardware

CPU Name: Intel Xeon E5-2650  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x 146.5 GB SAS, 15000 RPM  
 Other Hardware: Express5800/AD106b for Disk Subsystem

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: Kernel 2.6.32-220.el6.x86\_64  
 C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B120d-h (Intel Xeon E5-2650)

**SPECint2006 = 44.9**

**SPECint\_base2006 = 41.5**

**CPU2006 license:** 9006

**Test date:** Aug-2012

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jun-2012

**Tested by:** NEC Corporation

**Software Availability:** Feb-2012

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	392	24.9	392	24.9	<b>392</b>	<b>24.9</b>	333	29.3	<b>333</b>	<b>29.3</b>	333	29.3
401.bzip2	519	18.6	<b>520</b>	<b>18.6</b>	520	18.6	<b>510</b>	18.9	510	18.9	<b>510</b>	<b>18.9</b>
403.gcc	<b>300</b>	<b>26.9</b>	300	26.9	300	26.9	295	27.3	<b>295</b>	<b>27.3</b>	295	27.3
429.mcf	165	55.3	165	55.4	<b>165</b>	<b>55.4</b>	165	55.3	165	55.4	<b>165</b>	<b>55.4</b>
445.gobmk	564	18.6	<b>553</b>	<b>19.0</b>	544	19.3	489	21.5	<b>488</b>	<b>21.5</b>	488	21.5
456.hmmer	219	42.6	218	42.8	<b>218</b>	<b>42.7</b>	212	43.9	<b>212</b>	<b>43.9</b>	212	43.9
458.sjeng	521	23.2	<b>521</b>	<b>23.2</b>	521	23.2	<b>522</b>	<b>23.2</b>	522	23.2	523	23.2
462.libquantum	8.69	2380	8.49	2440	<b>8.49</b>	<b>2440</b>	8.69	2380	8.49	2440	<b>8.49</b>	<b>2440</b>
464.h264ref	640	34.6	<b>639</b>	<b>34.6</b>	639	34.6	<b>498</b>	<b>44.5</b>	497	44.5	501	44.1
471.omnetpp	273	22.9	275	22.7	<b>274</b>	<b>22.8</b>	201	31.1	<b>200</b>	<b>31.3</b>	200	31.3
473.astar	287	24.5	<b>287</b>	<b>24.5</b>	287	24.5	287	24.5	<b>287</b>	<b>24.5</b>	287	24.5
483.xalancbmk	<b>163</b>	<b>42.4</b>	163	42.2	163	42.4	<b>156</b>	<b>44.2</b>	156	44.2	156	44.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance

Memory Voltage: 1.5 V

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

OMP\_NUM\_THREADS = "16"

Added glibc-static-2.12-1.47.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B120d-h (Intel Xeon E5-2650)

**SPECint2006 = 44.9**

**SPECint\_base2006 = 41.5**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Aug-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2012

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m64`

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B120d-h (Intel Xeon E5-2650)

**SPECint2006 = 44.9**

**SPECint\_base2006 = 41.5**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Aug-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2012

## Peak Compiler Invocation (Continued)

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias
```

```
401.bzip2: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
               -opt-prefetch -ansi-alias
```

```
403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
               -opt-malloc-options=3 -auto-ilp32
```

429.mcf: basepeak = yes

```
445.gobmk: -xSSE4_2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -ansi-alias
```

```
456.hmmer: -xSSE4_2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
               -ansi-alias
```

```
458.sjeng: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll4
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B120d-h (Intel Xeon E5-2650)

**SPECint2006 = 44.9**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Aug-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block           -ansi-alias
              -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
```

473.astar: basepeak = yes

```
483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
                -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
```

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 10:51:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 August 2012.