



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S7, Intel Xeon E5-2430L, 2.0 GHz

SPECfp®2006 = 63.0

SPECfp_base2006 = 60.5

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

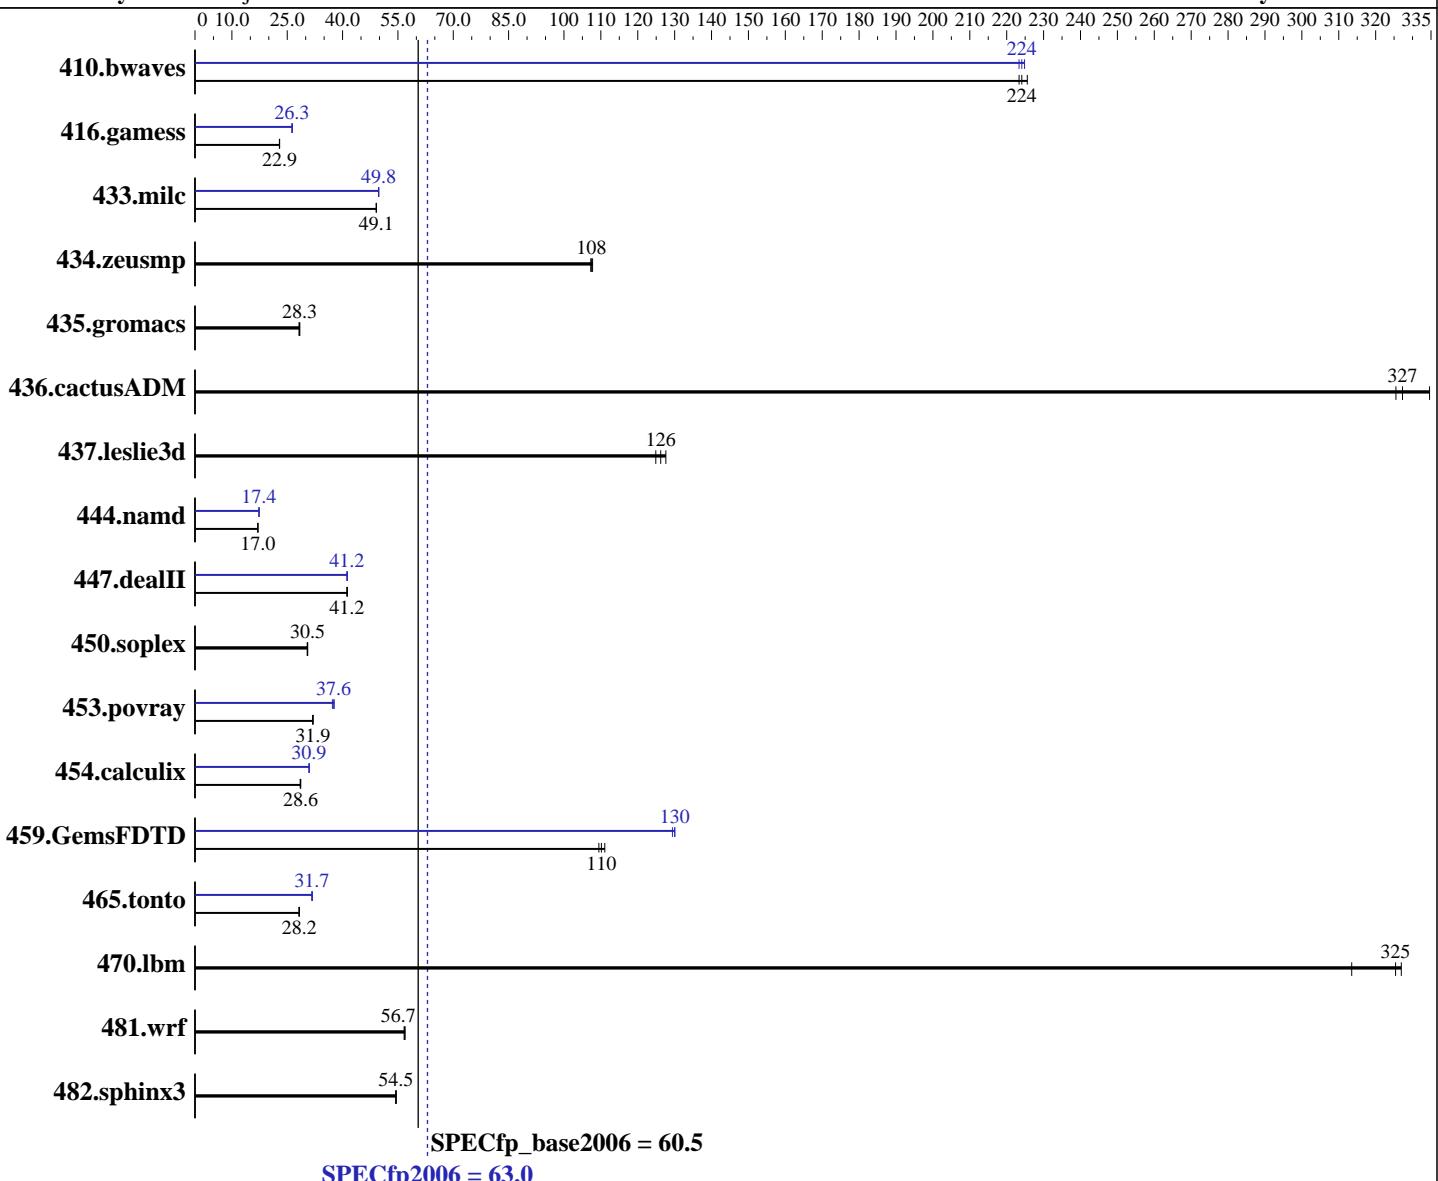

Hardware

CPU Name: Intel Xeon E5-2430L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Compiler: 2.6.32-220.el6.x86_64
 Auto Parallel: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 12.1.0.293 of Intel Fortran Studio XE for Linux
 Software: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S7, Intel Xeon E5-2430L, 2.0 GHz

SPECfp2006 = 63.0

SPECfp_base2006 = 60.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	60.8	223	60.2	226	<u>60.6</u>	<u>224</u>	60.4	225	<u>60.6</u>	<u>224</u>	60.8	223
416.gamess	<u>855</u>	<u>22.9</u>	856	22.9	854	22.9	<u>743</u>	26.3	<u>744</u>	<u>26.3</u>	745	26.3
433.milc	187	49.1	187	49.2	<u>187</u>	<u>49.1</u>	184	49.8	<u>184</u>	<u>49.8</u>	184	49.8
434.zeusmp	84.4	108	84.8	107	<u>84.6</u>	<u>108</u>	84.4	108	84.8	107	<u>84.6</u>	<u>108</u>
435.gromacs	253	28.2	<u>252</u>	<u>28.3</u>	251	28.4	<u>253</u>	28.2	<u>252</u>	<u>28.3</u>	251	28.4
436.cactusADM	35.7	335	<u>36.5</u>	<u>327</u>	36.7	325	<u>35.7</u>	335	<u>36.5</u>	<u>327</u>	36.7	325
437.leslie3d	<u>74.5</u>	<u>126</u>	75.3	125	73.7	128	<u>74.5</u>	<u>126</u>	75.3	125	73.7	128
444.namd	471	17.0	471	17.0	<u>471</u>	<u>17.0</u>	<u>462</u>	<u>17.4</u>	462	17.4	462	17.4
447.dealII	277	41.3	<u>278</u>	<u>41.2</u>	278	41.2	<u>277</u>	41.3	278	41.2	<u>278</u>	<u>41.2</u>
450.soplex	<u>273</u>	<u>30.5</u>	274	30.4	273	30.5	<u>273</u>	<u>30.5</u>	274	30.4	273	30.5
453.povray	<u>167</u>	<u>31.9</u>	166	32.0	167	31.9	<u>143</u>	37.2	<u>142</u>	<u>37.6</u>	141	37.7
454.calculix	288	28.7	<u>288</u>	<u>28.6</u>	289	28.5	<u>267</u>	30.9	267	30.9	<u>267</u>	<u>30.9</u>
459.GemsFDTD	95.5	111	96.9	109	<u>96.3</u>	<u>110</u>	<u>81.6</u>	<u>130</u>	81.6	130	82.0	129
465.tonto	<u>348</u>	<u>28.2</u>	349	28.2	348	28.3	309	31.8	<u>310</u>	<u>31.7</u>	311	31.7
470.lbm	42.0	327	43.8	314	<u>42.2</u>	<u>325</u>	42.0	327	43.8	314	<u>42.2</u>	<u>325</u>
481.wrf	196	57.0	<u>197</u>	<u>56.7</u>	197	56.7	196	<u>57.0</u>	<u>197</u>	<u>56.7</u>	197	56.7
482.sphinx3	358	54.4	<u>358</u>	<u>54.5</u>	357	54.5	<u>358</u>	<u>54.4</u>	<u>358</u>	<u>54.5</u>	357	54.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Platform Notes

BIOS configuration:

Frequency Floor Override = Enable



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S7, Intel Xeon E5-2430L, 2.0 GHz

SPECfp2006 = 63.0

SPECfp_base2006 = 60.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x E3-1270v2 CPU + 32 GB memory using RHEL6.2

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S7, Intel Xeon E5-2430L, 2.0 GHz

SPECfp2006 = 63.0

SPECfp_base2006 = 60.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S7, Intel Xeon E5-2430L, 2.0 GHz

SPECfp2006 = 63.0

SPECfp_base2006 = 60.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: -xsSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-ansi-alias

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S7, Intel Xeon E5-2430L, 2.0 GHz

SPECfp2006 = 63.0

SPECfp_base2006 = 60.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 10:23:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 September 2012.