



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4610, 2.40 GHz)

**SPECint\_rate2006 = 883**

**SPECint\_rate\_base2006 = 847**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

**Test date:** Aug-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

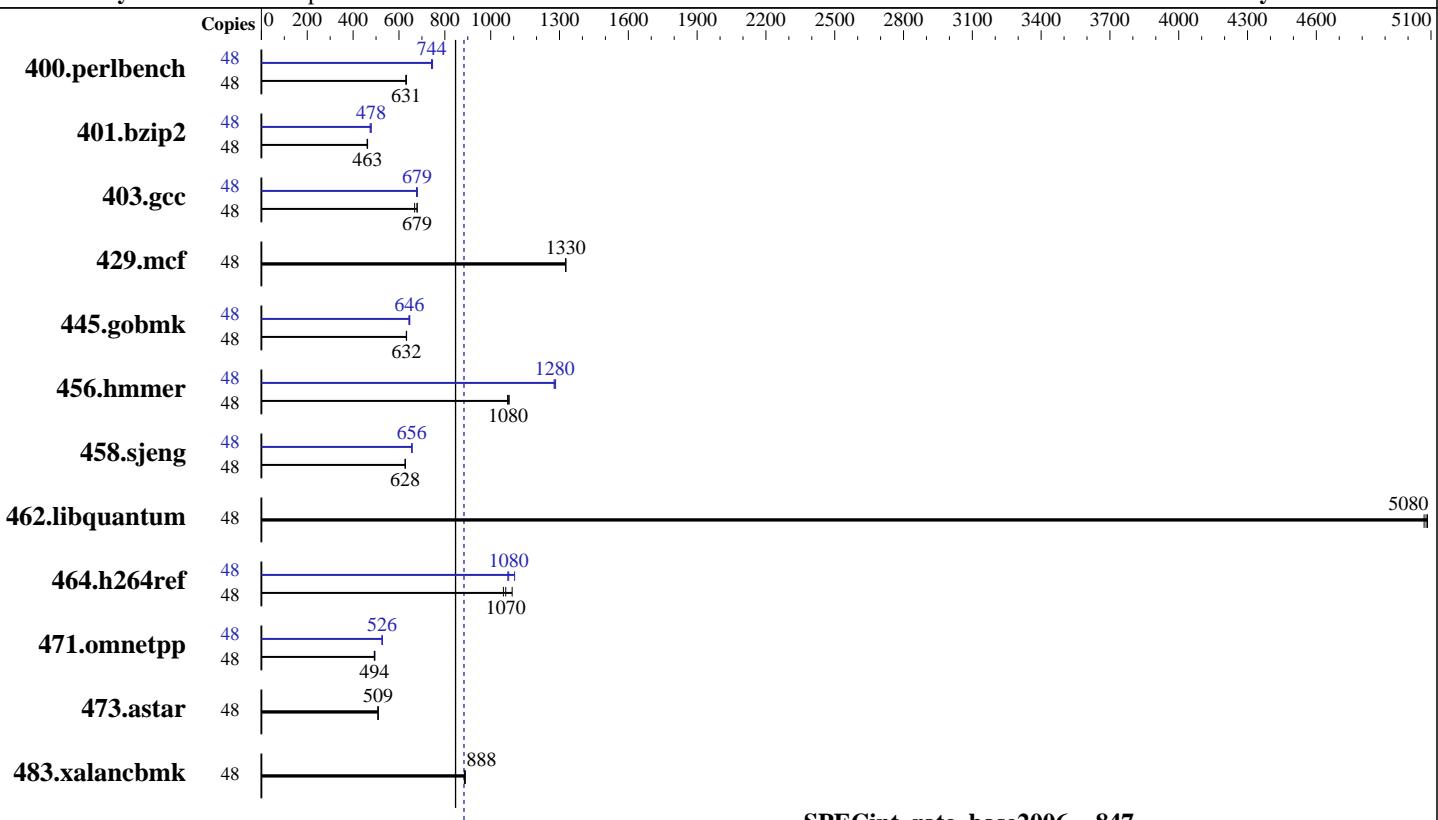

**SPECint\_rate\_base2006 = 847**

**SPECint\_rate2006 = 883**

### Hardware

CPU Name: Intel Xeon E5-4610  
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
CPU MHz: 2400  
FPU: Integrated  
CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2,3,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4610, 2.40 GHz)

**SPECint\_rate2006 = 883**

**SPECint\_rate\_base2006 = 847**

CPU2006 license: 11

Test date: Aug-2012

Test sponsor: IBM Corporation

Hardware Availability: Aug-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	<b>743</b>	<b>631</b>	744	631	742	632	48	<b>631</b>	<b>744</b>	632	742	628	747
401.bzip2	48	1005	461	1000	463	<b>1001</b>	<b>463</b>	48	<b>968</b>	<b>478</b>	977	474	968	478
403.gcc	48	<b>569</b>	<b>679</b>	578	668	569	680	48	<b>568</b>	<b>680</b>	<b>569</b>	<b>679</b>	571	676
429.mcf	48	<b>330</b>	<b>1330</b>	330	1330	330	1330	48	<b>330</b>	<b>1330</b>	330	1330	330	1330
445.gobmk	48	795	633	796	632	<b>796</b>	<b>632</b>	48	<b>780</b>	<b>646</b>	778	647	783	643
456.hammer	48	417	1070	414	1080	<b>416</b>	<b>1080</b>	48	349	1280	<b>350</b>	<b>1280</b>	351	1280
458.sjeng	48	926	627	<b>925</b>	<b>628</b>	925	628	48	886	656	<b>885</b>	<b>656</b>	884	657
462.libquantum	48	196	5080	196	5070	<b>196</b>	<b>5080</b>	48	196	5080	196	5070	<b>196</b>	<b>5080</b>
464.h264ref	48	1007	1060	<b>997</b>	<b>1070</b>	971	1090	48	988	1070	<b>985</b>	<b>1080</b>	962	1100
471.omnetpp	48	<b>607</b>	<b>494</b>	606	495	609	492	48	569	527	570	526	<b>570</b>	<b>526</b>
473.astar	48	662	509	663	509	<b>662</b>	<b>509</b>	48	662	509	663	509	<b>662</b>	<b>509</b>
483.xalancbmk	48	374	885	373	889	<b>373</b>	<b>888</b>	48	374	885	373	889	<b>373</b>	<b>888</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on congo-pete Fri Aug 17 15:31:09 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4610 0 @ 2.40GHz
        4 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4610, 2.40 GHz)

**SPECint\_rate2006 = 883**

**SPECint\_rate\_base2006 = 847**

**CPU2006 license:** 11

**Test date:** Aug-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Aug-2012

**Tested by:** IBM Corporation

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```
siblings : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
physical 2: cores 0 1 2 3 4 5
physical 3: cores 0 1 2 3 4 5
cache size : 15360 kB

From /proc/meminfo
MemTotal:      264503640 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux congo-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 17 13:21

SPEC is set to: /cpu2006.1.2
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/mapper/vg_congopete-lv_root
                  ext4   264G  5.9G  245G   3%  /


Additional information from dmidecode:
Memory:
 32x Micron 36JSF1G72PZ-1G6M1 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/lib/32:/cpu2006.1.2/lib/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4610, 2.40 GHz)

**SPECint\_rate2006 = 883**

**SPECint\_rate\_base2006 = 847**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

**Test date:** Aug-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/smartheap -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4610, 2.40 GHz)

**SPECint\_rate2006 = 883**

**SPECint\_rate\_base2006 = 847**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Aug-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x440  
(Intel Xeon E5-4610, 2.40 GHz)

**SPECint\_rate2006 = 883**

**SPECint\_rate\_base2006 = 847**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

**Test date:** Aug-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 10:28:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 September 2012.