



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®_rate2006 = 325

Servidor Itautec MX205 (Intel Xeon E5-2670)

SPECint_rate_base2006 = 313

CPU2006 license: 9001


Test date: Dec-2011

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Dec-2011

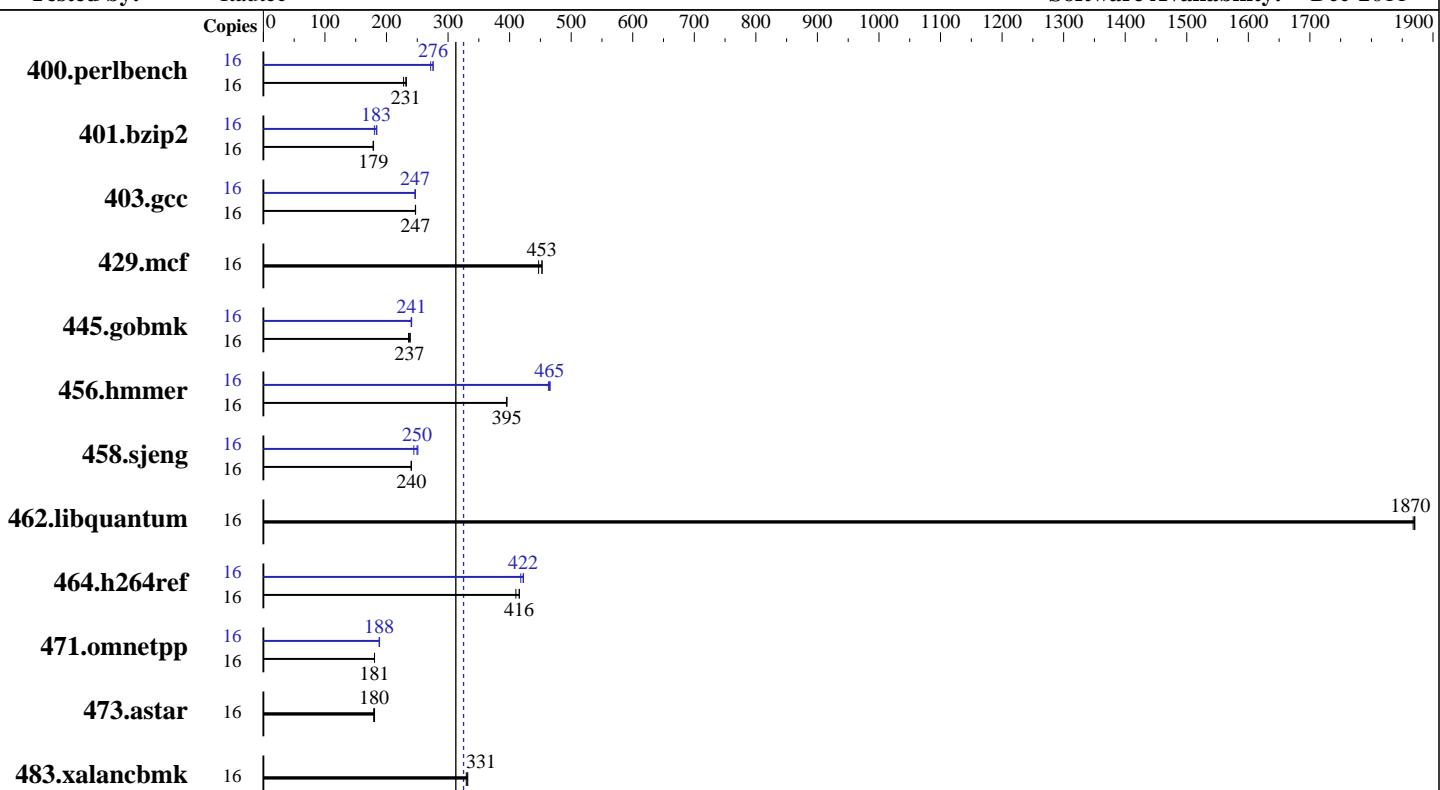

SPECint_rate_base2006 = 313

SPECint_rate2006 = 325

Hardware

CPU Name:	Intel Xeon E5-2670
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	8 cores, 1 chip, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB 1Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	500 GB, SATA-2, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

SPECint_rate2006 = 325

Servidor Itautech MX205 (Intel Xeon E5-2670)

SPECint_rate_base2006 = 313

CPU2006 license: 9001

Test date: Dec-2011

Test sponsor: Itautech

Hardware Availability: Jun-2012

Tested by: Itautech

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	673	232	686	228	676	231	16	575	272	567	276	567	276
401.bzip2	16	864	179	866	178	862	179	16	841	183	856	180	837	184
403.gcc	16	521	247	521	247	521	247	16	522	247	523	246	522	247
429.mcf	16	326	447	322	453	322	453	16	326	447	322	453	322	453
445.gobmk	16	708	237	712	236	703	239	16	697	241	699	240	697	241
456.hmmer	16	378	395	378	395	378	395	16	320	466	322	463	321	465
458.sjeng	16	806	240	805	240	805	240	16	776	250	792	244	771	251
462.libquantum	16	177	1870	177	1870	177	1870	16	177	1870	177	1870	177	1870
464.h264ref	16	852	416	863	410	852	416	16	838	423	847	418	839	422
471.omnetpp	16	554	180	554	181	554	181	16	531	188	530	189	531	188
473.astar	16	626	179	624	180	622	181	16	626	179	624	180	622	181
483.xalancbmk	16	334	331	333	332	335	330	16	334	331	333	332	335	330

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

```
Sysinfo program /home/rcaaneca/cpu2006/Docs/sysinfo
$Rev: 6775 $ $Date::: 2011-08-16 #$
running on itautecfam5 Sat Dec 3 17:36:01 2011
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Genuine Intel(R) CPU @ 2.60GHz
  1 "physical id"s (chips)
  16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

Servidor Itaute MX205 (Intel Xeon E5-2670)

CPU2006 license: 9001

Test sponsor: Itaute

Tested by: Itaute

SPECint_rate2006 = 325

SPECint_rate_base2006 = 313

Test date: Dec-2011

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      32851432 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux itautecfam5 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 3 17:20

SPEC is set to: /home/rcaneca/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_itautecfam5-lv_home
          ext4   280G  4.5G  262G   2% /home

(End of data from sysinfo program)
```

General Notes

This result was measured on the Servidor Itaute MX205.

The Servidor Itaute MX205, the Servidor Itaute MX225+ and the Servidor Itaute LX205 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

Servidor Itaute MX205 (Intel Xeon E5-2670)

CPU2006 license: 9001

Test sponsor: Itaute

Tested by: Itaute

SPECint_rate2006 = 325

SPECint_rate_base2006 = 313

Test date: Dec-2011

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/home/rcaenca/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

Servidor Itaute MX205 (Intel Xeon E5-2670)

CPU2006 license: 9001

Test sponsor: Itaute

Tested by: Itaute

SPECint_rate2006 = 325

SPECint_rate_base2006 = 313

Test date: Dec-2011

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaenca/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint_rate2006 = 325

Servidor Itaute MX205 (Intel Xeon E5-2670)

SPECint_rate_base2006 = 313

CPU2006 license: 9001

Test date: Dec-2011

Test sponsor: Itaute

Hardware Availability: Jun-2012

Tested by: Itaute

Software Availability: Dec-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

http://www.spec.org/cpu2006/flags/Itaute-Servidor_Itaute-Intel-Linux-Platform.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

http://www.spec.org/cpu2006/flags/Itaute-Servidor_Itaute-Intel-Linux-Platform.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 10:29:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 September 2012.