



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp®2006 = 89.3**

**Huawei XH620 V2 (Intel Xeon E5-2670)**

**SPECfp\_base2006 = 85.3**

**CPU2006 license:** 3175


**Test date:** Aug-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

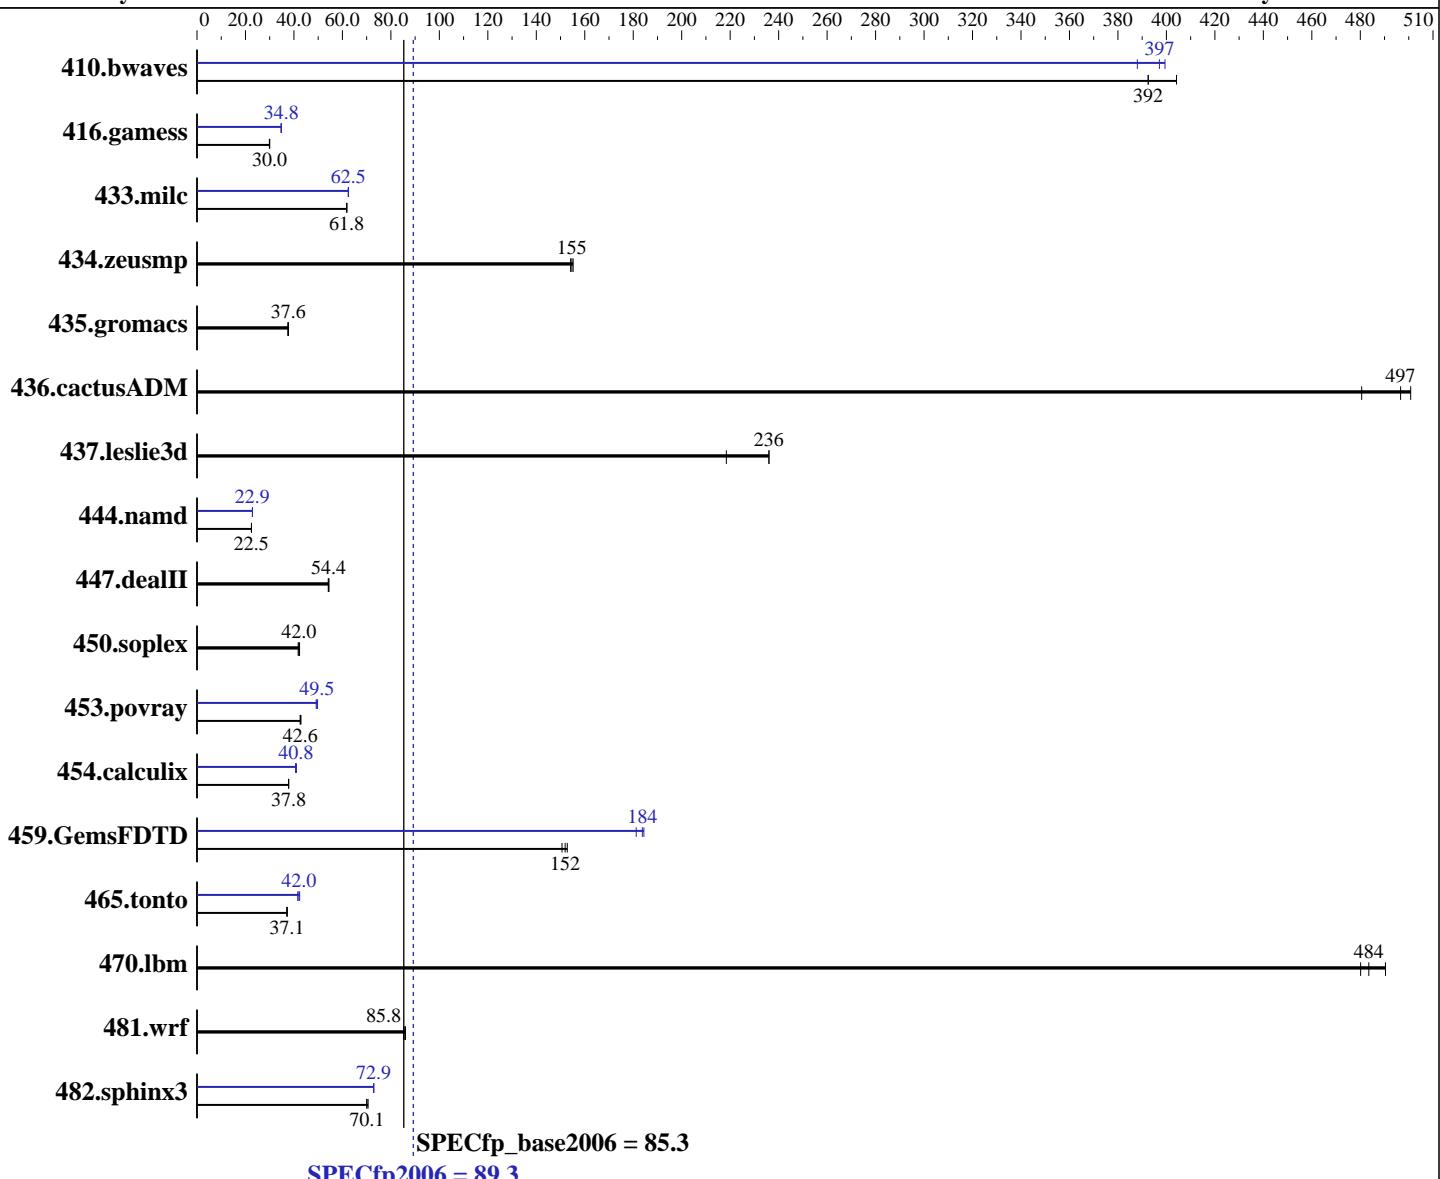

**SPECfp\_base2006 = 85.3**

**SPECfp®2006 = 89.3**

## Hardware

CPU Name: Intel Xeon E5-2670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: 2.6.32-220.el6.x86\_64  
 Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 File System: Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Software: ext4

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 89.3**

Huawei XH620 V2 (Intel Xeon E5-2670)

**SPECfp\_base2006 = 85.3**

CPU2006 license: 3175

Test date: Aug-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>34.6</b>	<b>392</b>	33.6	404	34.6	392	34.0	399	<b>34.2</b>	<b>397</b>	35.0	388
416.gamess	653	30.0	656	29.9	<b>653</b>	<b>30.0</b>	564	34.7	563	34.8	<b>563</b>	<b>34.8</b>
433.milc	149	61.8	<b>149</b>	<b>61.8</b>	149	61.8	<b>147</b>	<b>62.5</b>	147	62.5	147	62.4
434.zeusmp	58.6	155	<b>58.8</b>	<b>155</b>	59.0	154	<b>58.6</b>	<b>155</b>	<b>58.8</b>	<b>155</b>	59.0	154
435.gromacs	189	37.7	<b>190</b>	<b>37.6</b>	190	37.5	189	37.7	<b>190</b>	<b>37.6</b>	190	37.5
436.cactusADM	<b>24.1</b>	<b>497</b>	24.9	481	23.9	501	<b>24.1</b>	<b>497</b>	24.9	481	23.9	501
437.leslie3d	<b>39.8</b>	<b>236</b>	43.0	218	39.8	236	<b>39.8</b>	<b>236</b>	43.0	218	39.8	236
444.namd	357	22.5	<b>357</b>	<b>22.5</b>	357	22.5	<b>351</b>	<b>22.9</b>	350	22.9	351	22.9
447.dealII	211	54.2	210	54.4	<b>210</b>	<b>54.4</b>	211	54.2	210	54.4	<b>210</b>	<b>54.4</b>
450.soplex	<b>198</b>	<b>42.0</b>	197	42.3	200	41.7	<b>198</b>	<b>42.0</b>	197	42.3	200	41.7
453.povray	<b>125</b>	<b>42.6</b>	125	42.6	124	42.9	<b>108</b>	<b>49.2</b>	<b>108</b>	<b>49.5</b>	107	49.7
454.calculix	218	37.8	<b>218</b>	<b>37.8</b>	218	37.8	201	41.0	203	40.7	<b>202</b>	<b>40.8</b>
459.GemsFDTD	<b>69.8</b>	<b>152</b>	69.4	153	70.4	151	<b>57.7</b>	<b>184</b>	57.5	184	58.5	181
465.tonto	264	37.3	266	37.1	<b>265</b>	<b>37.1</b>	237	41.6	<b>234</b>	<b>42.0</b>	232	42.4
470.lbm	<b>28.4</b>	<b>484</b>	28.6	480	28.0	490	<b>28.4</b>	<b>484</b>	28.6	480	28.0	490
481.wrf	131	85.2	130	86.0	<b>130</b>	<b>85.8</b>	131	85.2	130	86.0	<b>130</b>	<b>85.8</b>
482.sphinx3	278	70.0	276	70.6	<b>278</b>	<b>70.1</b>	267	72.9	<b>267</b>	<b>72.9</b>	267	72.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:

Intel Hyper-Threading set to Disabled

Set Power Efficiency Mode to Performance

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3

running on RH62-rebuild Mon Aug 20 14:56:32 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 89.3**

Huawei XH620 V2 (Intel Xeon E5-2670)

**SPECfp\_base2006 = 85.3**

CPU2006 license: 3175

Test date: Aug-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings   : 8
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
    cache size : 20480 kB
```

```
From /proc/meminfo
MemTotal:      132124032 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux RH62-rebuild 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 20 08:54
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4  289G  135G  140G  50%  /
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,0,1"

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 89.3**

Huawei XH620 V2 (Intel Xeon E5-2670)

**SPECfp\_base2006 = 85.3**

CPU2006 license: 3175

Test date: Aug-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 89.3**

Huawei XH620 V2 (Intel Xeon E5-2670)

**SPECfp\_base2006 = 85.3**

**CPU2006 license:** 3175

**Test date:** Aug-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 89.3

Huawei XH620 V2 (Intel Xeon E5-2670)

SPECfp\_base2006 = 85.3

CPU2006 license: 3175

Test date: Aug-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:20:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 September 2012.