



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


SPECint®\_rate2006 = 3730

## IBM Power 780 (4.4 GHz, 64 core)

SPECint\_rate\_base2006 = 2830

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Sep-2012  
Hardware Availability: Oct-2012  
Software Availability: Nov-2012

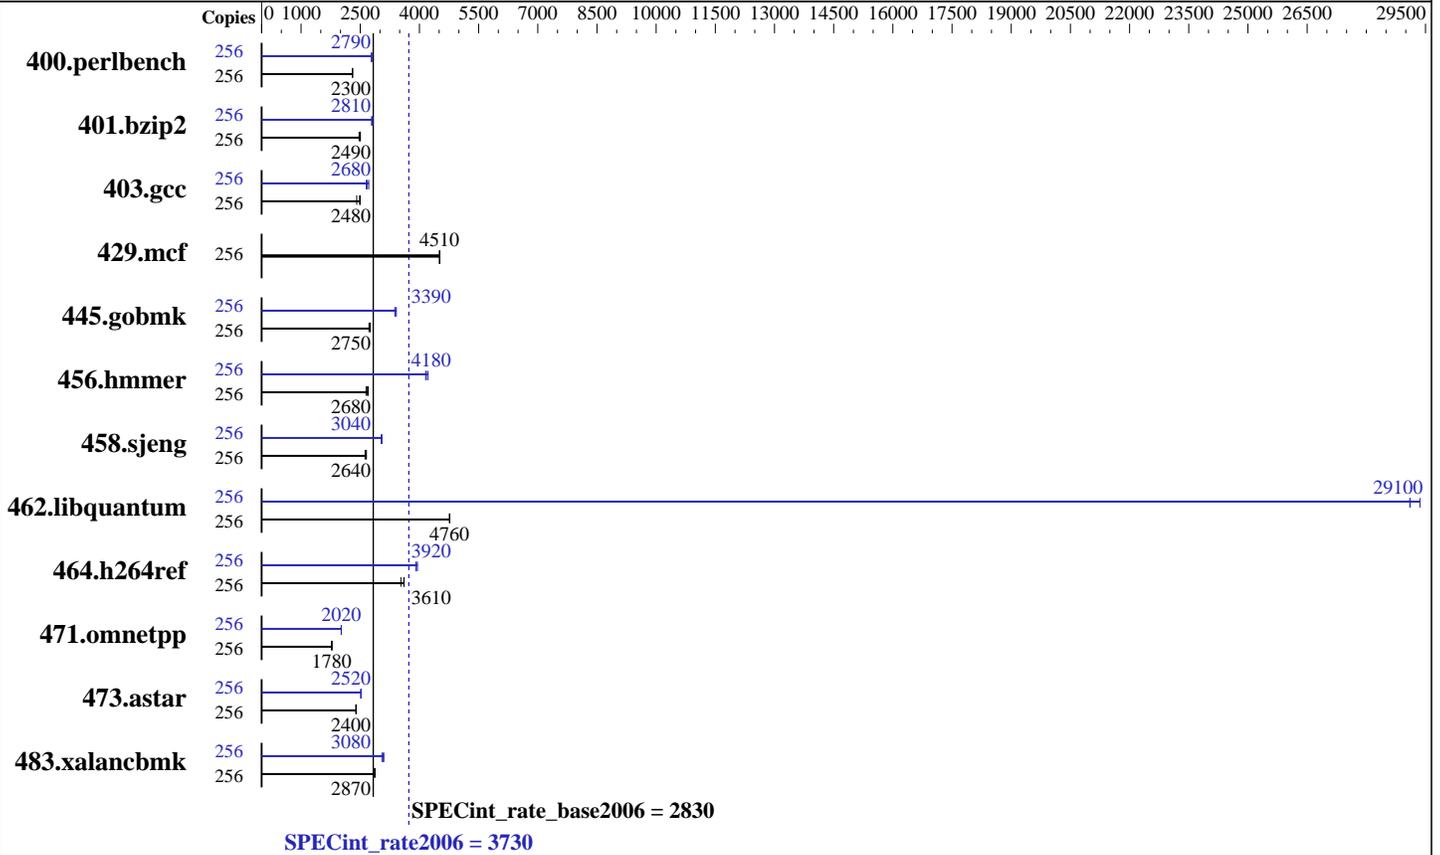

### Hardware

CPU Name: POWER7+  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.480 GHz  
 CPU MHz: 4424  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 16 chips, 4 cores/chip, 4 threads/core  
 CPU(s) orderable: 16,32,48,64 cores  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per core  
 Other Cache: None  
 Memory: 512 GB (64 x 8 GB) DDR3 1066 MHz  
 Disk Subsystem: 8 x 177 GB Raid0 SFF-1 SSD  
 Other Hardware: None

### Software

Operating System: IBM AIX V7.1  
 Compiler: C/C++: Version 12.1 of IBM XL C/C++ for AIX  
 Auto Parallel: No  
 File System: AIX/JFS2  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 3730

IBM Power 780 (4.4 GHz, 64 core)

SPECint\_rate\_base2006 = 2830

CPU2006 license: 11

Test date: Sep-2012

Test sponsor: IBM Corporation

Hardware Availability: Oct-2012

Tested by: IBM Corporation

Software Availability: Nov-2012

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	256	1086	2300	1085	2310	<b>1086</b>	<b>2300</b>	256	900	2780	<b>897</b>	<b>2790</b>	896	2790
401.bzip2	256	1000	2470	986	2500	<b>990</b>	<b>2490</b>	256	879	2810	<b>879</b>	<b>2810</b>	887	2790
403.gcc	256	855	2410	825	2500	<b>830</b>	<b>2480</b>	256	777	2650	759	2720	<b>769</b>	<b>2680</b>
429.mcf	256	517	4520	<b>517</b>	<b>4510</b>	518	4510	256	517	4520	<b>517</b>	<b>4510</b>	518	4510
445.gobmk	256	975	2750	987	2720	<b>978</b>	<b>2750</b>	256	<b>792</b>	<b>3390</b>	795	3380	786	3420
456.hammer	256	883	2700	<b>891</b>	<b>2680</b>	902	2650	256	566	4220	<b>572</b>	<b>4180</b>	574	4160
458.sjeng	256	1181	2620	1166	2660	<b>1172</b>	<b>2640</b>	256	1016	3050	1021	3030	<b>1020</b>	<b>3040</b>
462.libquantum	256	1114	4760	<b>1114</b>	<b>4760</b>	1113	4770	256	181	29400	<b>182</b>	<b>29100</b>	182	29100
464.h264ref	256	1605	3530	<b>1570</b>	<b>3610</b>	1569	3610	256	1448	3910	<b>1445</b>	<b>3920</b>	1434	3950
471.omnetpp	256	897	1780	901	1770	<b>899</b>	<b>1780</b>	256	791	2020	793	2020	<b>791</b>	<b>2020</b>
473.astar	256	752	2390	<b>750</b>	<b>2400</b>	749	2400	256	713	2520	714	2520	<b>713</b>	<b>2520</b>
483.xalanbmk	256	<b>615</b>	<b>2870</b>	620	2850	614	2880	256	<b>573</b>	<b>3080</b>	579	3050	570	3100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

C/C++ compiler updated to November 2012 PTF  
Version: 12.01.0000.0002

## Peak Tuning Notes

```

400.perlbench fdpr options: -O4 -cbpth -1 -sdp -1
401.bzip2 fdpr options: -O4 -vrox -nobldcg -sdp -1
403.gcc fdpr options: -O4 -cbpth -1 -sdp -1
429.mcf fdpr options: -O2
445.gobmk fdpr options: -O3
456.hammer fdpr options: -O3 -bldcg -ccc 10
458.sjeng fdpr options: -O3
464.h264ref fdpr options: -O4 -sdp -1 -vrox -lu -1
473.astar fdpr options: -O3 -vrox -bldcg
483.xalanbmk fdpr options: -O3 -bldcg -lu -1 -lux 1

```

## Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 3730

IBM Power 780 (4.4 GHz, 64 core)

SPECint\_rate\_base2006 = 2830

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: Oct-2012

Software Availability: Nov-2012

## Operating System Notes

AIX updated to V7.1 TL 2

All ulimits set to unlimited.

25600 16M large pages defined with vmo command

## Platform Notes

Service Processor Memory Mirroring Property Disabled

## General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY\_AFFINITY = "MCM"

XLFRTEOPTS = "intrinthds=1"

## Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_AIX

462.libquantum: -DSPEC\_CPU\_AIX

464.h264ref: -DSPEC\_CPU\_AIX -qchars=signed

483.xalancbmk: -DSPEC\_CPU\_AIX

## Base Optimization Flags

C benchmarks:

-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnv01

-D\_ILS\_MACROS -qalias=noansi -qalloca -blpdata

C++ benchmarks:

-qipa=threads -bmaxdata:0x20000000 -qlargepage -O4 -D\_ILS\_MACROS

-qrtti=all -D\_\_IBM\_FAST\_SET\_MAP\_ITERATOR -blpdata



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 3730

IBM Power 780 (4.4 GHz, 64 core)

SPECint\_rate\_base2006 = 2830

CPU2006 license: 11

Test date: Sep-2012

Test sponsor: IBM Corporation

Hardware Availability: Oct-2012

Tested by: IBM Corporation

Software Availability: Nov-2012

## Base Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

## Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_AIX  
462.libquantum: -DSPEC\_CPU\_AIX  
464.h264ref: -DSPEC\_CPU\_AIX -qchars=signed  
483.xalancbmk: -DSPEC\_CPU\_AIX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2  
-qarch=auto -qtune=auto -D\_ILS\_MACROS -qalias=noansi  
-blpdata -btextpsize:64K  
401.bz2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage  
-D\_ILS\_MACROS -blpdata -btextpsize:64K  
403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O5 -qlargepage -D\_ILS\_MACROS -qalloca  
-blpdata -btextpsize:64K  
429.mcf: basepeak = yes  
445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -D\_ILS\_MACROS -blpdata -btextpsize:64K  
456.hmmer: -qipa=threads -O5 -qsimd -qvecnv01 -qassert=refalign  
-D\_ILS\_MACROS -blpdata -btextpsize:64K

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 3730

IBM Power 780 (4.4 GHz, 64 core)

SPECint\_rate\_base2006 = 2830

CPU2006 license: 11

Test date: Sep-2012

Test sponsor: IBM Corporation

Hardware Availability: Oct-2012

Tested by: IBM Corporation

Software Availability: Nov-2012

## Peak Optimization Flags (Continued)

458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4  
-D\_ILS\_MACROS -blpdata -btextpsize:64K

462.libquantum: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64  
-qlargepage -D\_ILS\_MACROS -blpdata -btextpsize:64K

464.h264ref: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd  
-qvecnvoll -D\_ILS\_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O4 -qsimd -qvecnvoll -D\_ILS\_MACROS  
-qalign=natural -qrtti=all -qinlglue  
-D\_\_IBM\_FAST\_SET\_MAP\_ITERATOR -blpdata -btextpsize:64K

473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O5 -qlargepage -D\_ILS\_MACROS -qinlglue  
-qalign=natural -blpdata -btextpsize:64K

483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage  
-D\_ILS\_MACROS -qinlglue -D\_\_IBM\_FAST\_VECTOR -blpdata  
-btextpsize:64K

## Peak Other Flags

C benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

400.perlbench: -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 3730

IBM Power 780 (4.4 GHz, 64 core)

SPECint\_rate\_base2006 = 2830

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: Oct-2012

Software Availability: Nov-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:50:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 October 2012.