



SPEC® CINT2006 Result


Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Tecal RH5885 V2

SPECint®2006 = 25.1
SPECint_base2006 = 23.4

CPU2006 license: 13
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2012
Hardware Availability: Oct-2012
Software Availability: Oct-2012

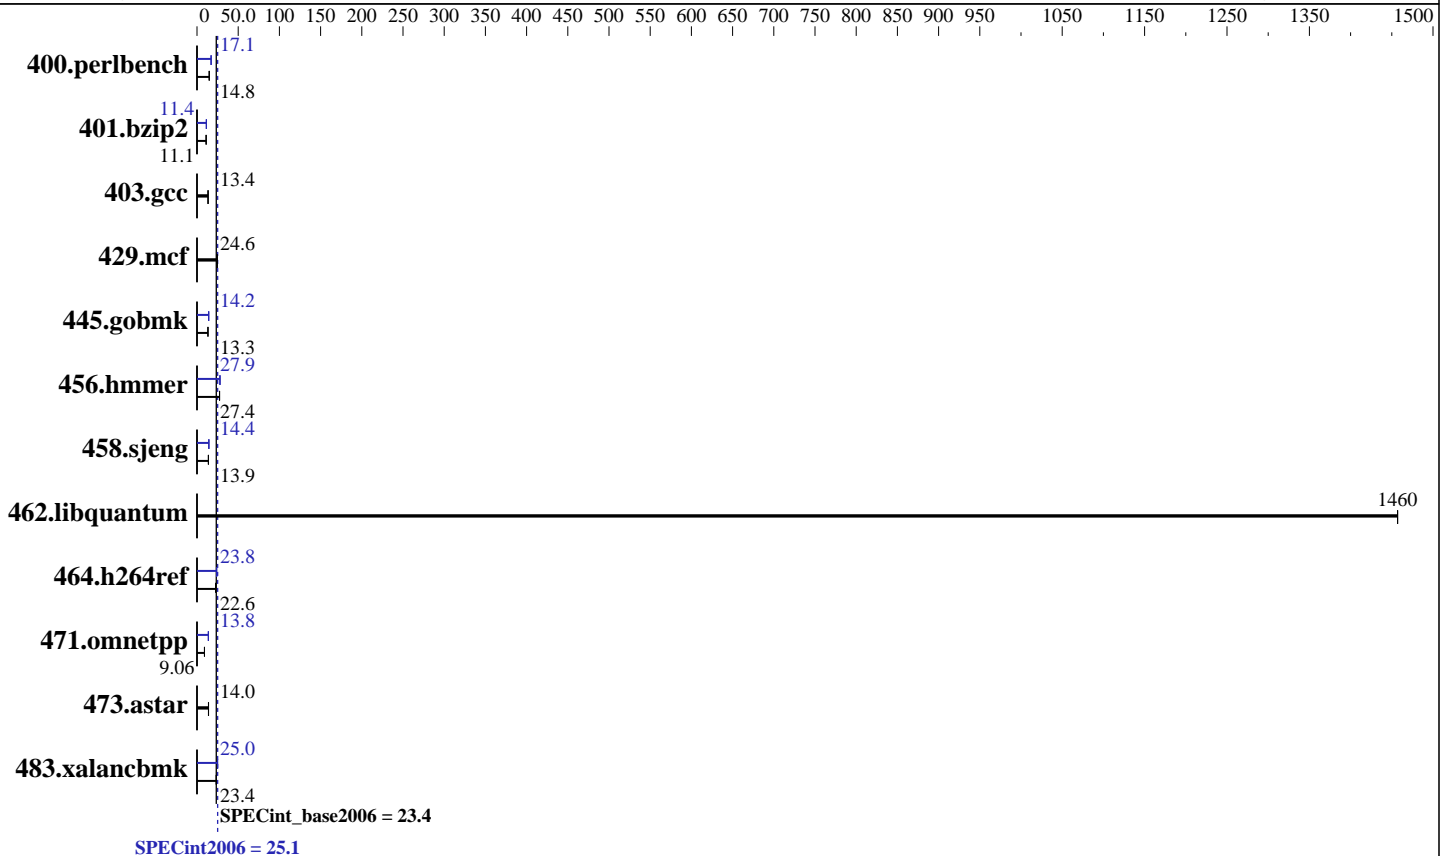

Hardware

CPU Name: Intel Xeon E7-4807
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 18 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (64 x 8 GB 2Rx4 PC3-10600R-9, ECC, running at 800 MHz)
 Disk Subsystem: 100 GB SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 13.0.0.079 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Tecal RH5885 V2

SPECint2006 = 25.1
SPECint_base2006 = 23.4

CPU2006 license: 13
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2012
Hardware Availability: Oct-2012
Software Availability: Oct-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	653	15.0	660	14.8	659	14.8	570	17.1	570	17.1	570	17.1
401.bzip2	868	11.1	869	11.1	868	11.1	849	11.4	849	11.4	849	11.4
403.gcc	598	13.5	599	13.4	600	13.4	598	13.5	599	13.4	600	13.4
429.mcf	374	24.4	371	24.6	371	24.6	374	24.4	371	24.6	371	24.6
445.gobmk	789	13.3	789	13.3	789	13.3	739	14.2	738	14.2	739	14.2
456.hammer	342	27.3	341	27.4	340	27.4	333	28.0	337	27.7	334	27.9
458.sjeng	873	13.9	873	13.9	874	13.8	841	14.4	841	14.4	841	14.4
462.libquantum	14.2	1460	14.2	1460	14.2	1460	14.2	1460	14.2	1460	14.2	1460
464.h264ref	979	22.6	979	22.6	983	22.5	928	23.8	928	23.8	928	23.8
471.omnetpp	690	9.05	689	9.07	690	9.06	454	13.8	455	13.7	450	13.9
473.astar	502	14.0	502	14.0	506	13.9	502	14.0	502	14.0	506	13.9
483.xalancbmk	293	23.5	295	23.4	295	23.4	276	25.0	276	25.0	276	25.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Intel Hyper-Threading set to Disabled

Sysinfo program /home/cpu2006/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3

running on Huawei-RH5885 Tue Oct 9 13:01:10 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7- 4807 @ 1.87GHz

4 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

physical 0: cores 0 1 2 18 24 25

physical 1: cores 0 1 2 18 24 25

physical 2: cores 2 8 9 16 17 18

physical 3: cores 0 1 2 18 24 25

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei Tecal RH5885 V2	SPECint2006 =	25.1
	SPECint_base2006 =	23.4

CPU2006 license: 13	Test date:	Oct-2012
Test sponsor: Huawei	Hardware Availability:	Oct-2012
Tested by: Huawei	Software Availability:	Oct-2012

Platform Notes (Continued)

cache size : 18432 KB

From /proc/meminfo

```
MemTotal:      529115232 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux Huawei-RH5885 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 9 09:02

SPEC is set to: /home/cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_huaweirh5885-lv_home
                ext4      80G   18G   58G   24% /home
```

Additional information from dmidecode:

Memory:

```
32x Samsung M393B1K70CH0-CH9 8 GB 800 MHz 2 rank
32x Samsung M393B1K70DH0-YH9 8 GB 800 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
OMP_NUM_THREADS = "24"
```

Binaries compiled on a system with 4xE7-4807 CPU + 512 GB memory using RHEL6.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei Tecal RH5885 V2	SPECint2006 =	25.1
	SPECint_base2006 =	23.4

CPU2006 license: 13	Test date:	Oct-2012
Test sponsor: Huawei	Hardware Availability:	Oct-2012
Tested by: Huawei	Software Availability:	Oct-2012

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/home/cpu2006/smartheap -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei Tecal RH5885 V2	SPECint2006 =	25.1
	SPECint_base2006 =	23.4

CPU2006 license: 13	Test date:	Oct-2012
Test sponsor: Huawei	Hardware Availability:	Oct-2012
Tested by: Huawei	Software Availability:	Oct-2012

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Tecal RH5885 V2

SPECint2006 =

25.1

SPECint_base2006 =

23.4

CPU2006 license: 13

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2012

Hardware Availability: Oct-2012

Software Availability: Oct-2012

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/home/cpu2006/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/home/cpu2006/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:58:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 November 2012.