



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECint<sup>®</sup>\_rate2006 = 887

Cisco UCS B420 M3 (Intel Xeon E5-4610, 2.40 GHz)

SPECint\_rate\_base2006 = 850

CPU2006 license: 9019


Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

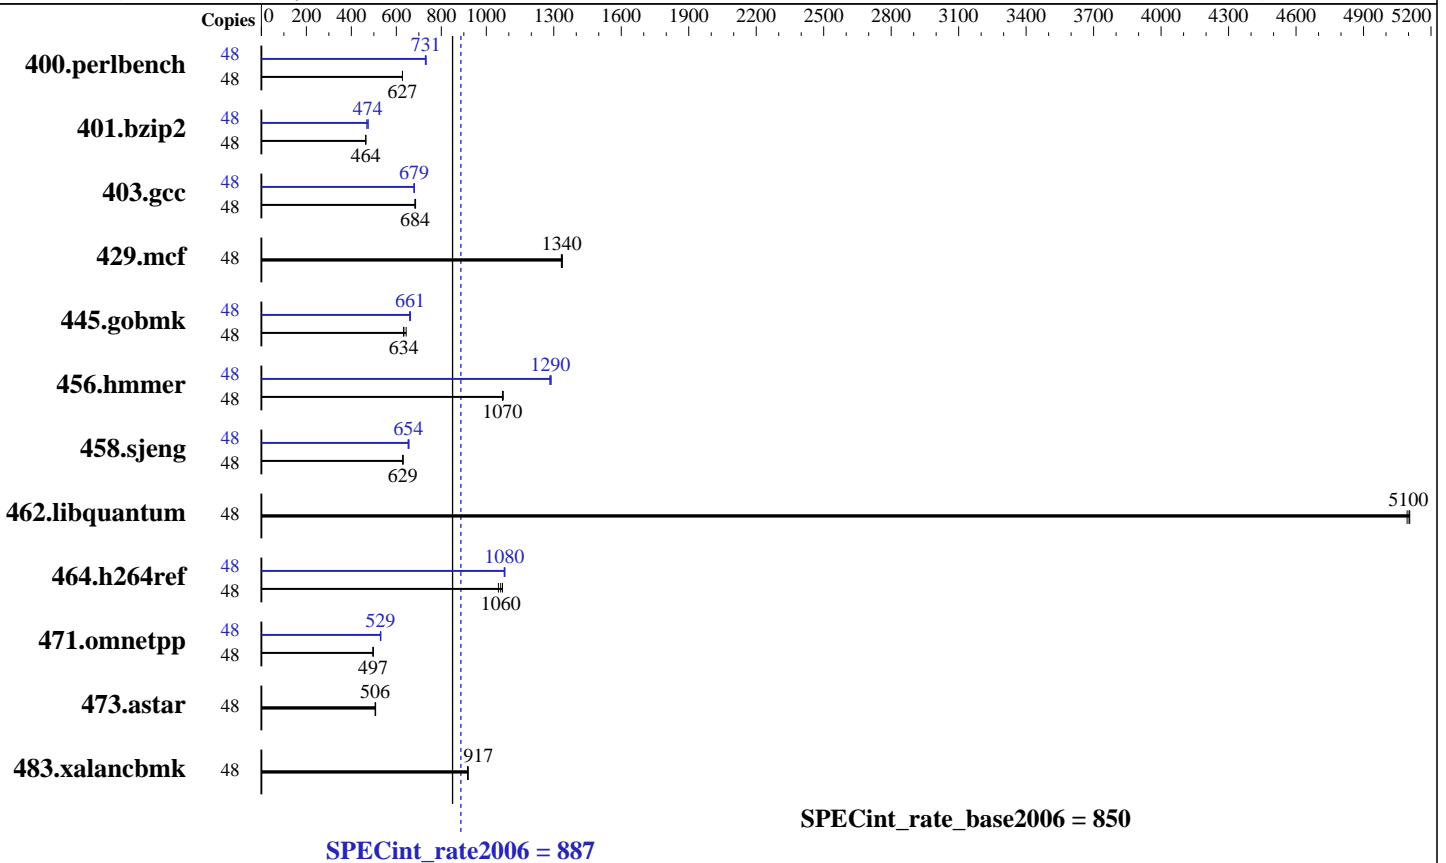

**Hardware**

CPU Name: Intel Xeon E5-4610  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 1 X 300 Gb 15000 RPM SAS  
 Other Hardware: None

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECint\_rate2006 = **887**

Cisco UCS B420 M3 (Intel Xeon E5-4610, 2.40 GHz)

SPECint\_rate\_base2006 = **850**

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Oct-2012  
Hardware Availability: Sep-2012  
Software Availability: Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	748	627	747	627	<b>748</b>	<b>627</b>	48	<b>641</b>	<b>731</b>	640	732	643	729
401.bzip2	48	999	464	<b>998</b>	<b>464</b>	998	464	48	<b>978</b>	<b>474</b>	989	469	976	475
403.gcc	48	564	686	<b>565</b>	<b>684</b>	566	683	48	568	680	<b>569</b>	<b>679</b>	569	679
429.mcf	48	328	1330	327	1340	<b>328</b>	<b>1340</b>	48	328	1330	327	1340	<b>328</b>	<b>1340</b>
445.gobmk	48	796	632	<b>795</b>	<b>634</b>	782	644	48	<b>762</b>	<b>661</b>	764	659	760	663
456.hammer	48	418	1070	<b>418</b>	<b>1070</b>	416	1080	48	348	1290	349	1280	<b>348</b>	<b>1290</b>
458.sjeng	48	924	629	922	630	<b>923</b>	<b>629</b>	48	<b>889</b>	<b>654</b>	885	657	890	653
462.libquantum	48	<b>195</b>	<b>5100</b>	195	5110	195	5090	48	<b>195</b>	<b>5100</b>	195	5110	195	5090
464.h264ref	48	991	1070	1008	1050	<b>998</b>	<b>1060</b>	48	<b>982</b>	<b>1080</b>	981	1080	984	1080
471.omnetpp	48	<b>604</b>	<b>497</b>	604	496	603	498	48	<b>567</b>	<b>529</b>	565	531	567	529
473.astar	48	666	506	<b>665</b>	<b>506</b>	663	508	48	666	506	<b>665</b>	<b>506</b>	663	508
483.xalancbmk	48	360	920	<b>361</b>	<b>917</b>	361	917	48	360	920	<b>361</b>	<b>917</b>	361	917

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
Hyper-Threading set to Enabled  
Processor C6 Report set to Disabled  
Processor C1E set to Disabled  
CPU Performance set to HPC  
LV DDR Mode set to Performance-mode  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Tue Oct 16 02:25:48 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-4610 0 @ 2.40GHz  
4 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

**SPECint\_rate2006 = 887**

Cisco UCS B420 M3 (Intel Xeon E5-4610, 2.40 GHz)

**SPECint\_rate\_base2006 = 850**

**CPU2006 license:** 9019

**Test date:** Oct-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2012

**Tested by:** Cisco Systems

**Software Availability:** Feb-2012

### Platform Notes (Continued)

48 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
physical 2: cores 0 1 2 3 4 5
physical 3: cores 0 1 2 3 4 5
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal:      264503292 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 2 Oct 16 01:37

SPEC is set to: /opt/cpu2006-1.2

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        ext4      274G  40G  220G  16% /
```

Additional information from dmidecode:

Memory:

```
8x 0xCE00 M393B1K70DH0-YH9 8 GB 1333 MHz 2 rank
24x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
```

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 887

Cisco UCS B420 M3 (Intel Xeon E5-4610, 2.40 GHz)

SPECint\_rate\_base2006 = 850

CPU2006 license: 9019

Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 887

Cisco UCS B420 M3 (Intel Xeon E5-4610, 2.40 GHz)

SPECint\_rate\_base2006 = 850

CPU2006 license: 9019

Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 887

Cisco UCS B420 M3 (Intel Xeon E5-4610, 2.40 GHz)

SPECint\_rate\_base2006 = 850

CPU2006 license: 9019

Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 13:59:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 November 2012.