



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp®2006 = 66.3**

BL275+ (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_base2006 = 63.0**

CPU2006 license: 20


Test date: Oct-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Bull SAS

Software Availability: Dec-2011

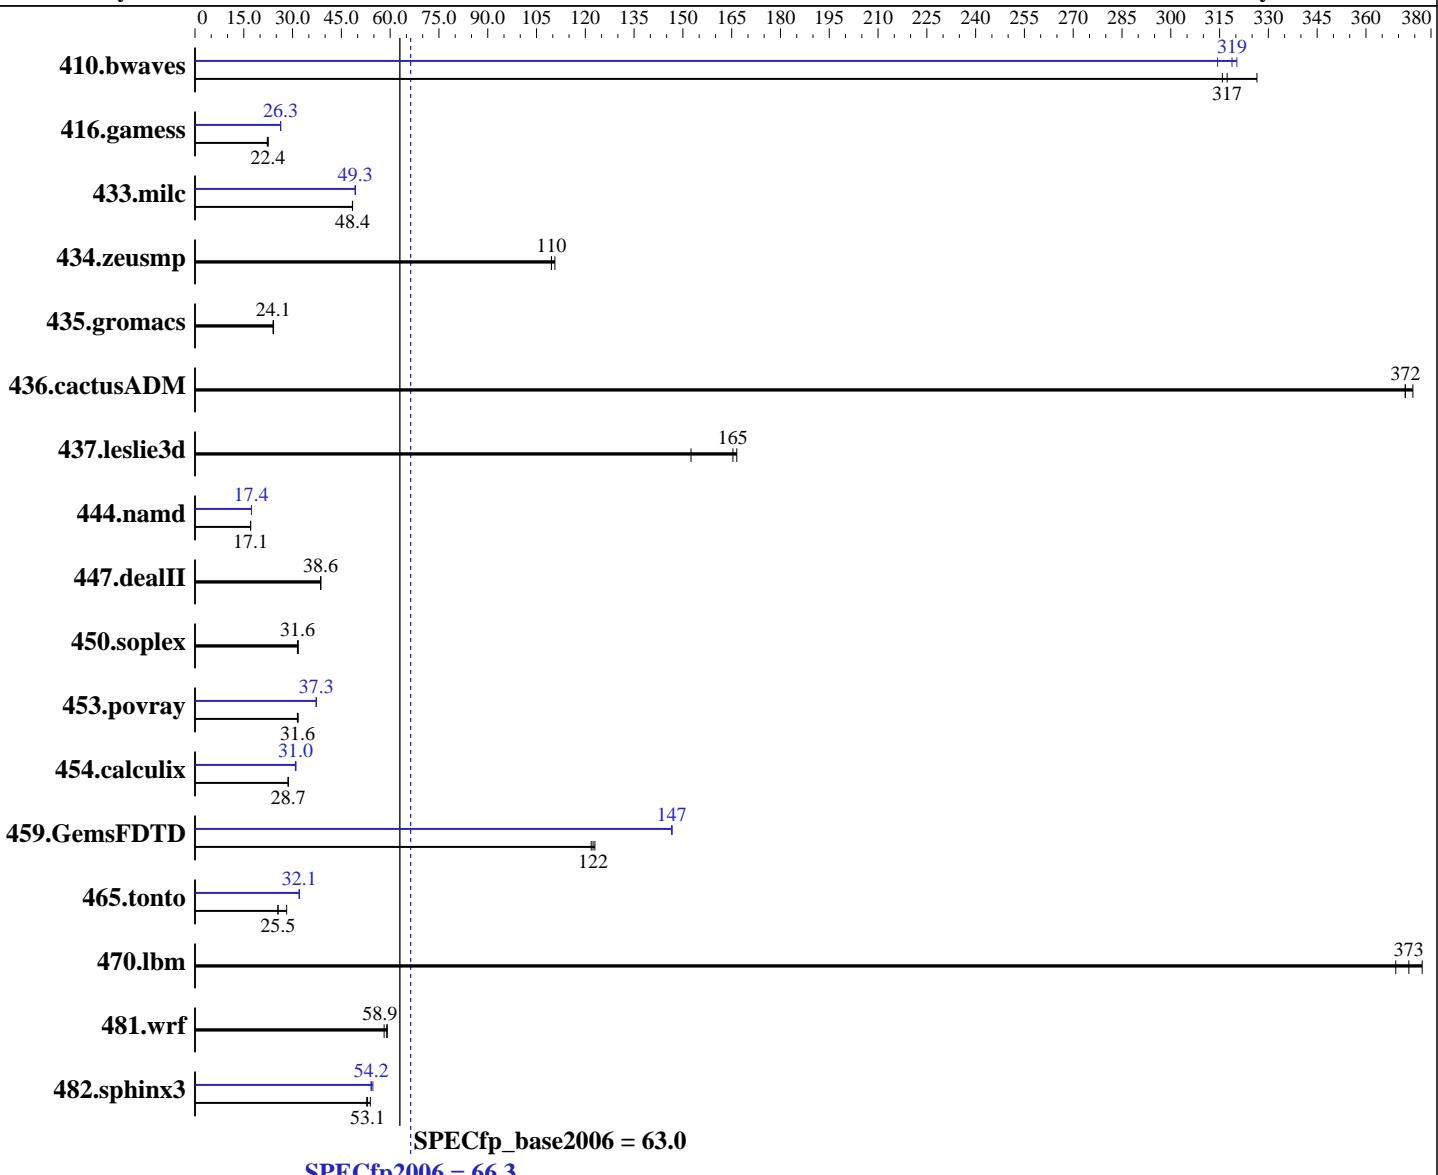

## Hardware

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: 2.6.32-220.el6.x86\_64  
 Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 File System: Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Software Availability: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp2006 = 66.3**

BL275+ (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_base2006 = 63.0**

CPU2006 license: 20

Test date: Oct-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Bull SAS

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 2 x 146 GB 15000 RPM SAS, RAID 0  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	41.6	326	43.0	316	<b>42.8</b>	<b>317</b>	42.4	320	43.2	314	<b>42.6</b>	<b>319</b>
416.gamess	881	22.2	871	22.5	<b>874</b>	<b>22.4</b>	744	26.3	<b>744</b>	<b>26.3</b>	744	26.3
433.milc	190	48.4	<b>190</b>	<b>48.4</b>	189	48.5	186	49.3	186	49.3	<b>186</b>	<b>49.3</b>
434.zeusmp	<b>83.0</b>	<b>110</b>	83.0	110	82.2	111	<b>83.0</b>	<b>110</b>	83.0	110	82.2	111
435.gromacs	<b>296</b>	<b>24.1</b>	296	24.2	298	24.0	<b>296</b>	<b>24.1</b>	296	24.2	298	24.0
436.cactusADM	32.1	372	31.9	374	<b>32.1</b>	<b>372</b>	32.1	372	31.9	374	<b>32.1</b>	<b>372</b>
437.leslie3d	<b>56.8</b>	<b>165</b>	56.4	167	61.6	153	<b>56.8</b>	<b>165</b>	56.4	167	61.6	153
444.namd	469	17.1	<b>469</b>	<b>17.1</b>	470	17.1	462	17.4	<b>462</b>	<b>17.4</b>	462	17.4
447.dealII	296	38.7	296	38.6	<b>296</b>	<b>38.6</b>	296	38.7	296	38.6	<b>296</b>	<b>38.6</b>
450.soplex	263	31.7	265	31.5	<b>264</b>	<b>31.6</b>	263	31.7	265	31.5	<b>264</b>	<b>31.6</b>
453.povray	168	31.7	169	31.5	<b>169</b>	<b>31.6</b>	143	37.3	<b>143</b>	<b>37.3</b>	142	37.3
454.calculix	<b>288</b>	<b>28.7</b>	288	28.7	288	28.6	<b>267</b>	30.9	<b>267</b>	<b>31.0</b>	266	31.0
459.GemsFDTD	86.3	123	<b>86.7</b>	<b>122</b>	87.1	122	72.4	147	72.4	147	<b>72.4</b>	<b>147</b>
465.tonto	<b>385</b>	<b>25.5</b>	349	28.2	386	25.5	307	32.0	<b>307</b>	<b>32.1</b>	306	32.1
470.lbm	37.2	369	<b>36.8</b>	<b>373</b>	36.4	377	<b>37.2</b>	369	<b>36.8</b>	<b>373</b>	36.4	377
481.wrf	189	59.1	<b>190</b>	<b>58.9</b>	192	58.1	189	59.1	<b>190</b>	<b>58.9</b>	192	58.1
482.sphinx3	362	53.9	369	52.8	<b>367</b>	<b>53.1</b>	356	54.7	<b>360</b>	<b>54.2</b>	360	54.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /spec/cpu2006.1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Thu Oct 18 16:53:01 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp2006 = 66.3**

BL275+ (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_base2006 = 63.0**

CPU2006 license: 20

Test date: Oct-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Bull SAS

Software Availability: Dec-2011

## Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz
  2 "physical id"s (chips)
    12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings   : 6
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:      132274252 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
  EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 18 16:51

SPEC is set to: /spec/cpu2006.1.2
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/mapper/VolGroup-lv_root
                ext4   172G   77G   86G  48%  /


Additional information from dmidecode:
Memory:
  16x Samsung M392B1K70DM0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"

LD\_LIBRARY\_PATH = "/spec/cpu2006.1.2/libs/32:/spec/cpu2006.1.2/libs/64"

OMP\_NUM\_THREADS = "12"

Intel HT Technology = Disable

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp2006 = 66.3**

BL275+ (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_base2006 = 63.0**

CPU2006 license: 20

Test date: Oct-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Bull SAS

Software Availability: Dec-2011

## General Notes (Continued)

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp2006 = 66.3**

BL275+ (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_base2006 = 63.0**

CPU2006 license: 20

Test date: Oct-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Bull SAS

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp2006 = 66.3**

BL275+ (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_base2006 = 63.0**

CPU2006 license: 20

Test date: Oct-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Bull SAS

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Bull-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Bull-Platform-Settings-V1.2.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECfp2006 = 66.3**

BL275+ (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_base2006 = 63.0**

**CPU2006 license:** 20

**Test date:** Oct-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** Jul-2012

**Tested by:** Bull SAS

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:10:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 November 2012.