



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 36.5

ProLiant DL160 G6
(2.40 GHz, Intel Xeon E5620)

SPECint_base2006 = 34.6

CPU2006 license: 3


Test date: Oct-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2010

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

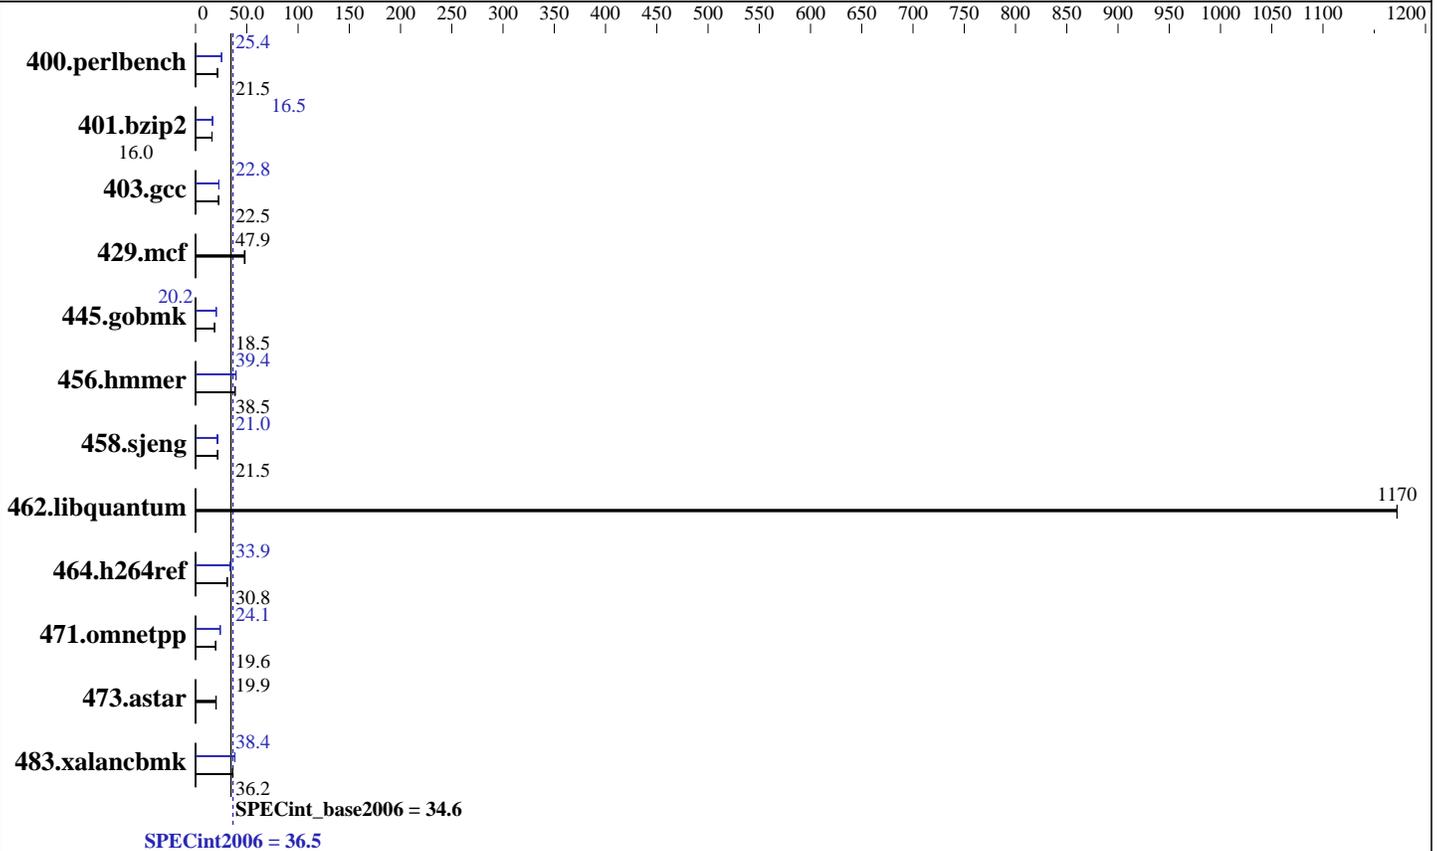

Hardware

CPU Name: Intel Xeon E5620
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 2 x 750 GB 7.2 K SATA, RAID 1
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.3, (Santiago)
 Kernel 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL160 G6
(2.40 GHz, Intel Xeon E5620)

SPECint2006 = 36.5

SPECint_base2006 = 34.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2012
Hardware Availability: Mar-2010
Software Availability: Jun-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	457	21.4	455	21.5	<u>455</u>	<u>21.5</u>	385	25.4	<u>385</u>	<u>25.4</u>	385	25.4
401.bzip2	601	16.0	601	16.1	<u>601</u>	<u>16.0</u>	584	16.5	584	16.5	<u>584</u>	<u>16.5</u>
403.gcc	<u>358</u>	<u>22.5</u>	358	22.5	359	22.4	354	22.8	<u>354</u>	<u>22.8</u>	354	22.8
429.mcf	189	48.3	<u>190</u>	<u>47.9</u>	191	47.6	189	48.3	<u>190</u>	<u>47.9</u>	191	47.6
445.gobmk	566	18.5	566	18.5	<u>566</u>	<u>18.5</u>	520	20.2	<u>520</u>	<u>20.2</u>	520	20.2
456.hammer	242	38.6	<u>242</u>	<u>38.5</u>	242	38.5	237	39.4	<u>237</u>	<u>39.4</u>	237	39.4
458.sjeng	562	21.5	563	21.5	<u>562</u>	<u>21.5</u>	575	21.0	<u>575</u>	<u>21.0</u>	552	21.9
462.libquantum	<u>17.7</u>	<u>1170</u>	17.7	1170	17.7	1170	<u>17.7</u>	<u>1170</u>	17.7	1170	17.7	1170
464.h264ref	<u>718</u>	<u>30.8</u>	718	30.8	714	31.0	652	33.9	<u>652</u>	<u>33.9</u>	652	33.9
471.omnetpp	318	19.7	319	19.6	<u>319</u>	<u>19.6</u>	261	24.0	<u>260</u>	<u>24.1</u>	259	24.1
473.astar	349	20.1	<u>352</u>	<u>19.9</u>	353	19.9	349	20.1	<u>352</u>	<u>19.9</u>	353	19.9
483.xalancbmk	<u>190</u>	<u>36.2</u>	190	36.2	190	36.3	180	38.4	180	38.4	<u>180</u>	<u>38.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e:
numactl --localalloc runspec <etc>
```

Platform Notes

```
BIOS Configuration:
Power Efficiency Mode set to High Performance
Thermal Configuration set to Maximum Cooling

Sysinfo program /cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 # $ 6f2ebdff5032aaa42e583f96b07f99d3
running on DL160Gen8 Mon Oct 22 17:06:34 2012

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5620 @ 2.40GHz
2 "physical id"s (chips)
8 "processors"
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL160 G6
(2.40 GHz, Intel Xeon E5620)

SPECint2006 = 36.5

SPECint_base2006 = 34.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2012
Hardware Availability: Mar-2010
Software Availability: Jun-2012

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings  : 4
physical 0: cores 0 1 9 10
physical 1: cores 0 1 9 10
cache size : 12288 KB
```

```
From /proc/meminfo
MemTotal:      49416628 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux DL160Gen8 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 22 17:03
```

```
SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdb1       ext4      688G  16G  638G   3% /
```

```
Additional information from dmidecode:
BIOS HP 033 05/01/2012
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64"
OMP_NUM_THREADS = "8"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 36.5

ProLiant DL160 G6
(2.40 GHz, Intel Xeon E5620)

SPECint_base2006 = 34.6

CPU2006 license: 3

Test date: Oct-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2010

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 36.5

ProLiant DL160 G6
(2.40 GHz, Intel Xeon E5620)

SPECint_base2006 = 34.6

CPU2006 license: 3

Test date: Oct-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2010

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 36.5

ProLiant DL160 G6
(2.40 GHz, Intel Xeon E5620)

SPECint_base2006 = 34.6

CPU2006 license: 3

Test date: Oct-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2010

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:04:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 November 2012.