



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

**SPECint®\_rate2006 = 294**

ACTINA SOLAR G 100 S5+ (Intel Xeon E5-1660)

**SPECint\_rate\_base2006 = 282**

CPU2006 license: 9008


Test date: Nov-2012

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

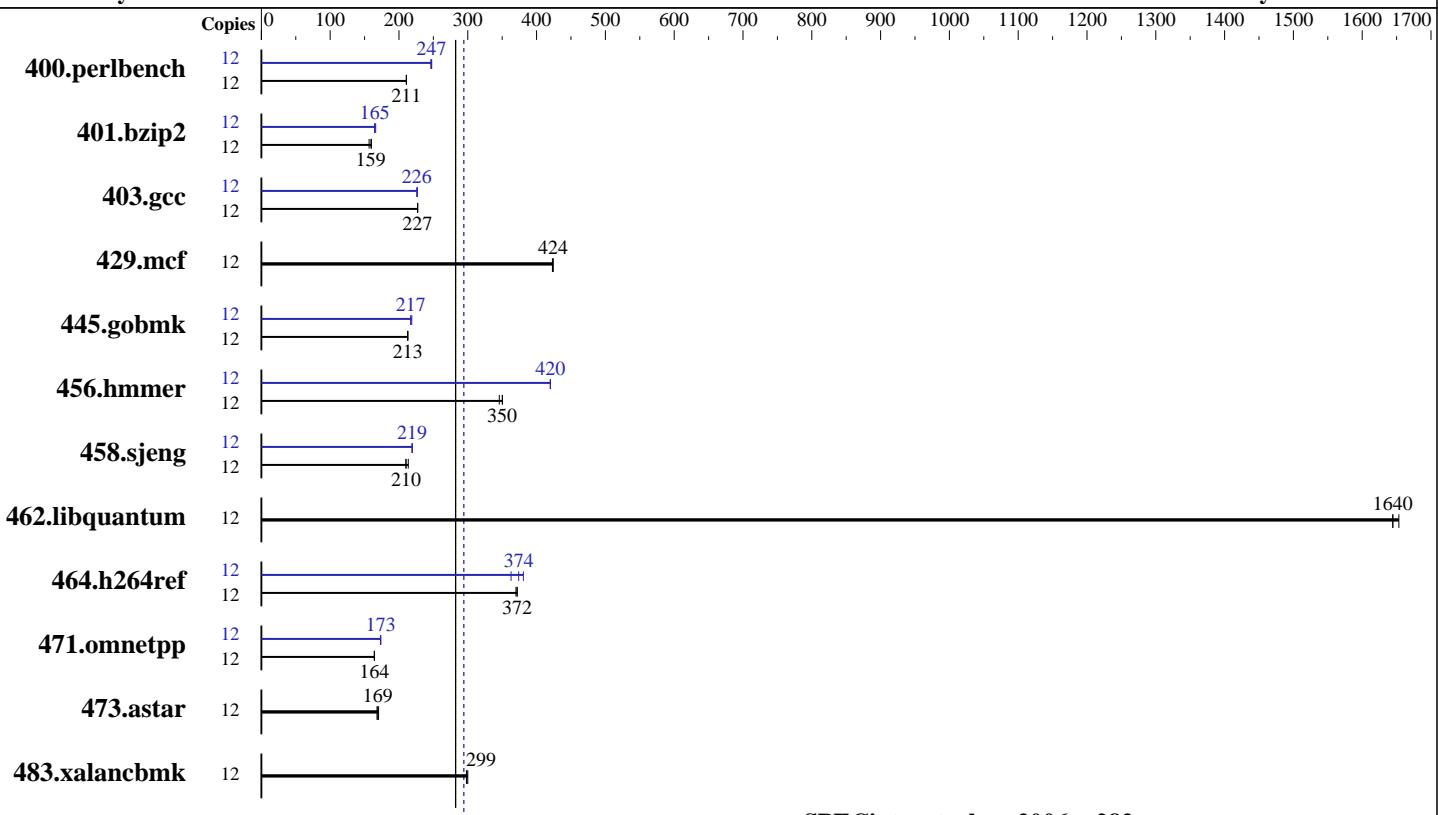

**SPECint\_rate\_base2006 = 282**

**SPECint\_rate2006 = 294**

### Hardware

CPU Name: Intel Xeon E5-1660  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>294</b>
ACTINA SOLAR G 100 S5+ (Intel Xeon E5-1660)	<b>SPECint_rate_base2006 =</b>	<b>282</b>
CPU2006 license: 9008	Test date:	Nov-2012
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2012
Tested by: ACTION S.A.	Software Availability:	Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	557	211	556	211	<b>556</b>	<b>211</b>	12	<b>474</b>	<b>247</b>	474	248	476	246
401.bzip2	12	724	160	740	157	<b>727</b>	<b>159</b>	12	<b>702</b>	<b>165</b>	697	166	704	165
403.gcc	12	<b>426</b>	<b>227</b>	425	227	426	227	12	427	226	<b>427</b>	<b>226</b>	426	227
429.mcf	12	258	424	<b>258</b>	<b>424</b>	259	423	12	258	424	<b>258</b>	<b>424</b>	259	423
445.gobmk	12	<b>592</b>	<b>213</b>	592	213	592	213	12	576	219	<b>579</b>	<b>217</b>	580	217
456.hammer	12	320	350	324	346	<b>320</b>	<b>350</b>	12	266	420	267	420	<b>266</b>	<b>420</b>
458.sjeng	12	691	210	680	214	<b>690</b>	<b>210</b>	12	<b>662</b>	<b>219</b>	662	219	663	219
462.libquantum	12	<b>151</b>	<b>1640</b>	151	1640	150	1650	12	<b>151</b>	<b>1640</b>	151	1640	150	1650
464.h264ref	12	718	370	714	372	<b>714</b>	<b>372</b>	12	<b>710</b>	<b>374</b>	697	381	732	363
471.omnetpp	12	<b>456</b>	<b>164</b>	457	164	456	164	12	433	173	432	173	<b>432</b>	<b>173</b>
473.astar	12	501	168	494	170	<b>498</b>	<b>169</b>	12	501	168	494	170	<b>498</b>	<b>169</b>
483.xalancbmk	12	276	300	278	298	<b>277</b>	<b>299</b>	12	276	300	278	298	<b>277</b>	<b>299</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #$
running on linux-ynxt Wed Nov 14 10:42:42 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-1660 0 @ 3.30GHz
  1 "physical id"s (chips)
  12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>294</b>
ACTINA SOLAR G 100 S5+ (Intel Xeon E5-1660)	<b>SPECint_rate_base2006 =</b>	<b>282</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Nov-2012
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	Mar-2012
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Feb-2012

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:       65889996 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
SuSE-release:
      SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2

uname -a:
Linux linux-ynxt 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 14 10:35 last=S

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  1.8T   30G  1.8T   2%  /


Additional information from dmidecode:

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>294</b>
ACTINA SOLAR G 100 S5+ (Intel Xeon E5-1660)	<b>SPECint_rate_base2006 =</b>	<b>282</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Nov-2012
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	Mar-2012
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Feb-2012

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smarterheap -lsmarterheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>294</b>
ACTINA SOLAR G 100 S5+ (Intel Xeon E5-1660)	<b>SPECint_rate_base2006 =</b>	<b>282</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Nov-2012
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	Mar-2012
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Feb-2012

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
               -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>294</b>
ACTINA SOLAR G 100 S5+ (Intel Xeon E5-1660)	<b>SPECint_rate_base2006 =</b>	<b>282</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Nov-2012
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	Mar-2012
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Feb-2012

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 13:25:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 December 2012.