



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 54.6

Huawei E9000 CH121 (Intel Xeon E5-4603)

SPECfp_base2006 = 52.4

CPU2006 license: 3175


Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Dec-2011

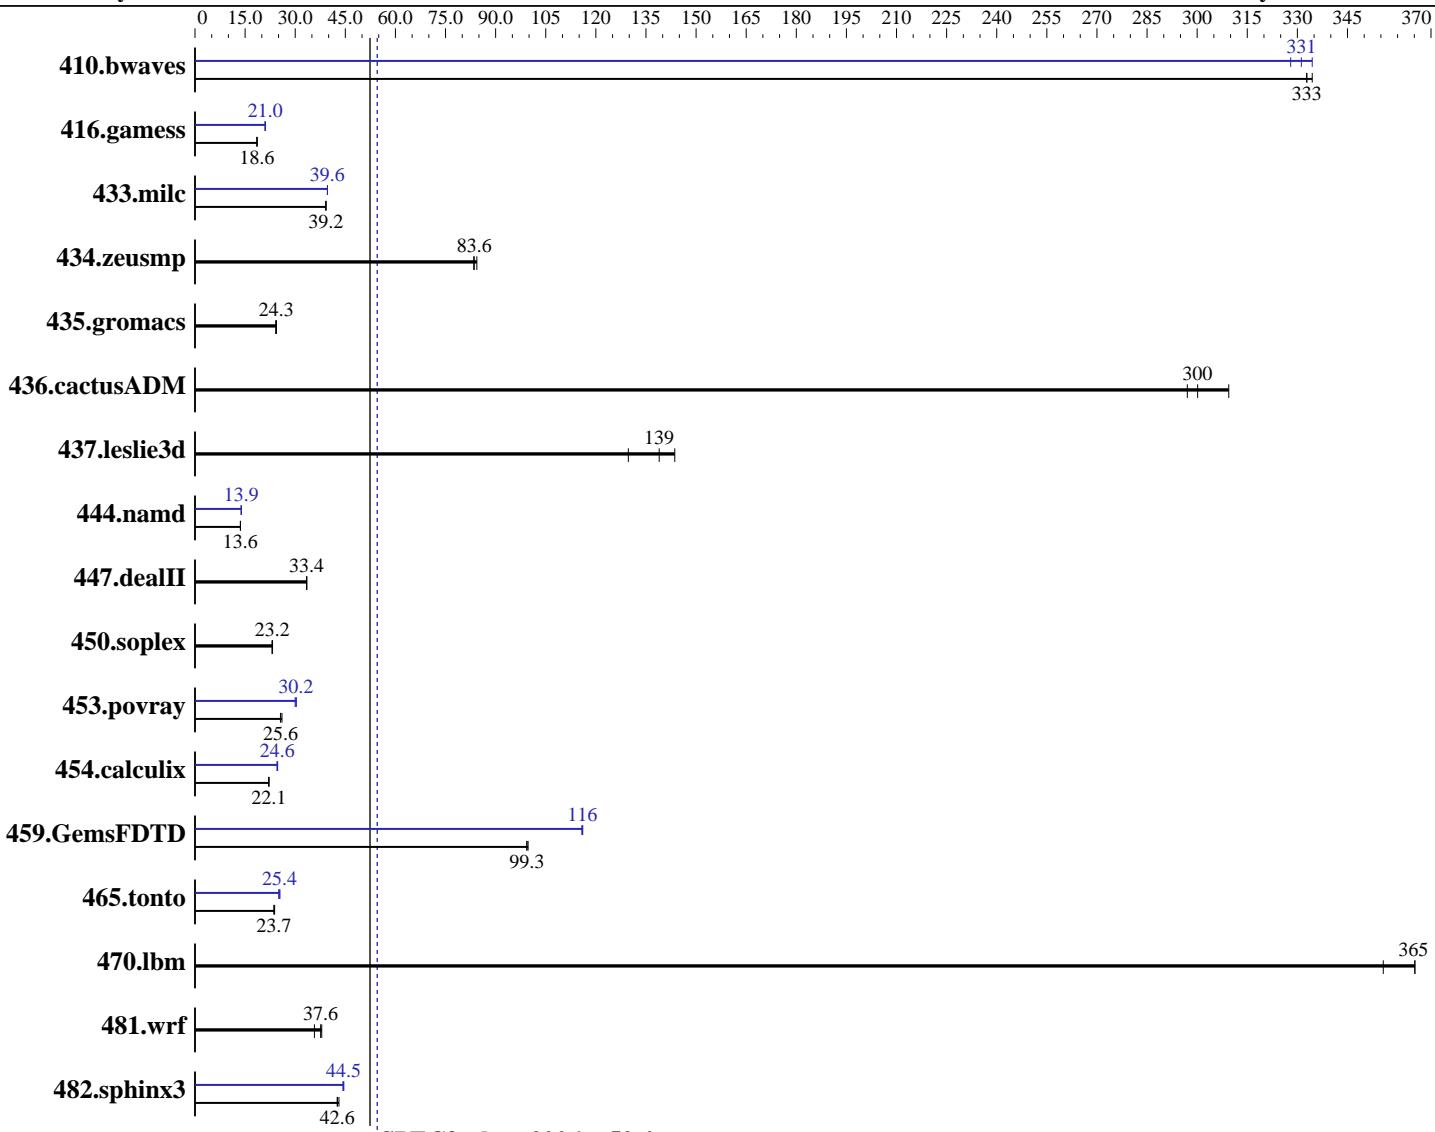

Hardware

CPU Name: Intel Xeon E5-4603
CPU Characteristics:
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
CPU(s) orderable: 1,2,3,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
Compiler: 2.6.32-220.el6.x86_64
Auto Parallel: C/C++: Version 12.1.4 of Intel C++ Studio XE for Linux;
File System: Fortran: Version 12.1.4 of Intel Fortran Studio XE for Linux
ext3

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 54.6

Huawei E9000 CH121 (Intel Xeon E5-4603)

SPECfp_base2006 = 52.4

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 2 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40.8	333	40.6	334	40.8	333	41.4	328	41.0	331	40.6	334
416.gamess	1054	18.6	1057	18.5	1053	18.6	931	21.0	932	21.0	933	21.0
433.milc	234	39.2	235	39.1	234	39.2	232	39.6	231	39.7	232	39.6
434.zeusmp	108	84.4	109	83.6	109	83.4	108	84.4	109	83.6	109	83.4
435.gromacs	294	24.3	295	24.2	293	24.4	294	24.3	295	24.2	293	24.4
436.cactusADM	39.8	300	40.2	297	38.6	309	39.8	300	40.2	297	38.6	309
437.leslie3d	67.6	139	72.5	130	65.4	144	67.6	139	72.5	130	65.4	144
444.namd	590	13.6	589	13.6	590	13.6	579	13.9	579	13.8	579	13.9
447.dealII	342	33.4	342	33.4	342	33.4	342	33.4	342	33.4	342	33.4
450.soplex	360	23.2	359	23.2	362	23.1	360	23.2	359	23.2	362	23.1
453.povray	208	25.6	204	26.0	207	25.6	175	30.3	176	30.2	177	30.0
454.calculix	373	22.1	372	22.2	374	22.1	333	24.7	335	24.6	335	24.6
459.GemsFDTD	106	99.7	107	99.3	107	99.3	91.4	116	91.6	116	91.4	116
465.tonto	416	23.7	413	23.8	416	23.7	393	25.0	388	25.4	388	25.4
470.lbm	37.6	365	37.6	365	38.6	356	37.6	365	37.6	365	38.6	356
481.wrf	297	37.6	294	37.9	312	35.8	297	37.6	294	37.9	312	35.8
482.sphinx3	458	42.6	452	43.1	457	42.6	438	44.5	440	44.3	438	44.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Select only test related files when installing the operating system

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /opt/spec2006/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost Sat Oct 13 00:32:16 2012

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 54.6

Huawei E9000 CH121 (Intel Xeon E5-4603)

SPECfp_base2006 = 52.4

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Dec-2011

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4603 0 @ 2.00GHz
        4 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 4
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
    physical 2: cores 0 1 2 3
    physical 3: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264494364 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 12 00:21
```

```
SPEC is set to: /opt/spec2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  249G  16G  220G  7%  /opt
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,0,1"

LD_LIBRARY_PATH = "/opt/spec2006/libs/32:/opt/spec2006/libs/64"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 54.6

Huawei E9000 CH121 (Intel Xeon E5-4603)

SPECfp_base2006 = 52.4

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Dec-2011

General Notes (Continued)

memory using RHEL6.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 54.6

Huawei E9000 CH121 (Intel Xeon E5-4603)

SPECfp_base2006 = 52.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2012

Hardware Availability: Aug-2012

Software Availability: Dec-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 54.6

Huawei E9000 CH121 (Intel Xeon E5-4603)

SPECfp_base2006 = 52.4

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revF.20130108.html>
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revF.20130108.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 54.6

Huawei E9000 CH121 (Intel Xeon E5-4603)

SPECfp_base2006 = 52.4

CPU2006 license: 3175

Test date: Oct-2012

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:58:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 January 2013.