



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6376)
AMD Opteron 6376

SPECint®_rate2006 = 1050

SPECint_rate_base2006 = 917

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

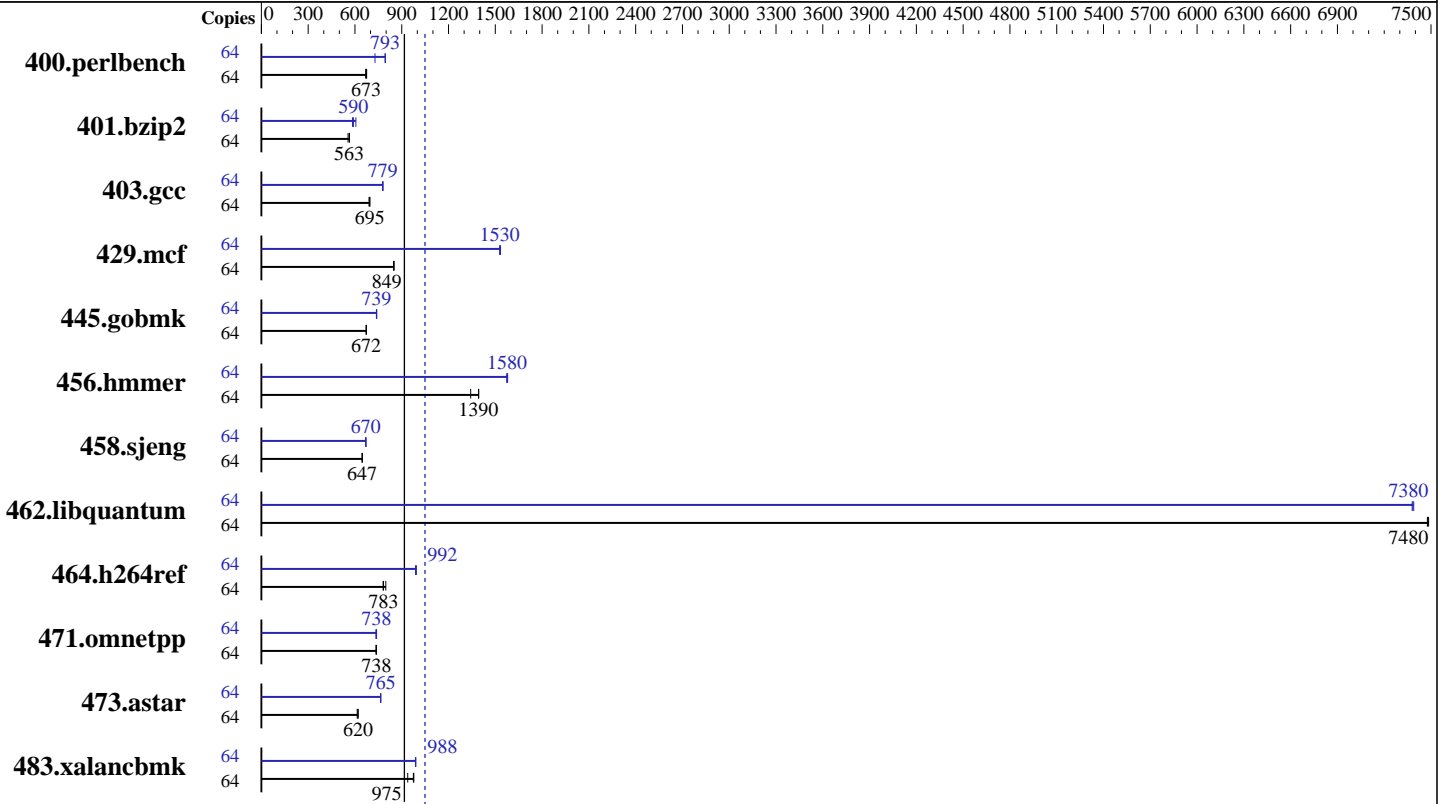

SPECint_rate2006 = 1050

SPECint_rate_base2006 = 917

Hardware

CPU Name: AMD Opteron 6376
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2,
Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite
(from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6376)
AMD Opteron 6376

SPECint_rate2006 = 1050

SPECint_rate_base2006 = 917

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	926	675	935	669	<u>930</u>	<u>673</u>	64	858	729	786	795	<u>788</u>	<u>793</u>
401.bzip2	64	1111	556	1093	565	<u>1096</u>	<u>563</u>	64	<u>1046</u>	<u>590</u>	1019	606	1057	584
403.gcc	64	741	695	<u>741</u>	<u>695</u>	746	690	64	662	778	661	779	<u>661</u>	<u>779</u>
429.mcf	64	689	848	<u>687</u>	<u>849</u>	686	851	64	<u>382</u>	<u>1530</u>	381	1530	382	1530
445.gobmk	64	997	673	<u>998</u>	<u>672</u>	999	672	64	908	740	<u>909</u>	<u>739</u>	910	738
456.hammer	64	445	1340	428	1390	<u>429</u>	<u>1390</u>	64	380	1570	378	1580	<u>379</u>	<u>1580</u>
458.sjeng	64	1199	646	<u>1197</u>	<u>647</u>	1197	647	64	1158	669	1155	671	<u>1156</u>	<u>670</u>
462.libquantum	64	177	7480	177	7480	<u>177</u>	<u>7480</u>	64	179	7390	180	7380	<u>180</u>	<u>7380</u>
464.h264ref	64	1775	798	<u>1809</u>	<u>783</u>	1815	780	64	1426	993	<u>1427</u>	<u>992</u>	1433	989
471.omnetpp	64	544	735	542	738	<u>542</u>	<u>738</u>	64	545	734	541	739	<u>542</u>	<u>738</u>
473.astar	64	731	614	<u>725</u>	<u>620</u>	725	620	64	587	766	588	765	<u>587</u>	<u>765</u>
483.xalancbmk	64	471	938	<u>453</u>	<u>975</u>	452	978	64	<u>447</u>	<u>988</u>	446	991	447	988

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6376)
AMD Opteron 6376

SPECint_rate2006 = 1050

SPECint_rate_base2006 = 917

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6376)
AMD Opteron 6376

SPECint_rate2006 = 1050

SPECint_rate_base2006 = 917

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
 -WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
 -CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
 -GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
 -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
 -OPT:goto=off -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
 -march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
 -m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
 -CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
 -m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -OPT:unroll_size=256 -OPT:unroll_times_max=8
 -OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
 -IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
 -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:prefetch=2 -OPT:alias=disjoint
 -OPT:unroll_times_max=16 -OPT:unroll_size=512
 -OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
 -CG:cmp_peep=on -CG:pre_local_sched=off -HP:bd=2m:heap=2m
 -CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6376)
AMD Opteron 6376

SPECint_rate2006 = 1050

SPECint_rate_base2006 = 917

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll_size=512 -OPT:unroll_times_max=16
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -LNO:pf2=0
-CG:local_sched_alg=1 -CG:p2align=0 -INLINE:aggressive=ON
-IPA:plimit=15000 -IPA:small_pu=100
-HP:bd=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bd=2m:heap=2m
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6376)
AMD Opteron 6376

SPECint_rate2006 = 1050

SPECint_rate_base2006 = 917

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:35:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.